

INITIAL GAMMA DATA FROM NUCLEAR WEAPON TESTS 1948 THROUGH 1962

410404

July 1965

Nuclear Defense Laboratory
Edgewood Arsenal, Maryland

NOTICE

This is an extract of **Initial Gamma Data from Nuclear Weapon Test**, which remains classified **SECRET/RESTRICTED DATA** as of this date.

Extract version prepared for:

Director

DEFENSE NUCLEAR AGENCY

Washington, D. C. 20305

Approved for public release; distribution unlimited.

1 June 1984

FOREWORD

This report has had classified material removed in order to make the information available on an unclassified, open publication basis, to any interested parties. This effort to declassify this report has been accomplished specifically to support the Department of Defense Nuclear Test Personnel Review (NTPR) Program. The objective is to facilitate studies of the low levels of radiation received by some individuals during the atmospheric nuclear test program by making as much information as possible available to all interested parties.

The material which has been deleted is all currently classified as Restricted Data or Formerly Restricted Data under the provision of the Atomic Energy Act of 1954, (as amended) or is National Security Information.

This report has been reproduced directly from available copies of the original material. The locations from which material has been deleted is generally obvious by the spacings and "holes" in the text. Thus the context of the material deleted is identified to assist the reader in the determination of whether the deleted information is germane to his study.

It is the belief of the individuals who have participated in preparing this report by deleting the classified material and of the Defense Nuclear Agency that the report accurately portrays the contents of the original and that the deleted material is of little or no significance to studies into the amounts or types of radiation received by any individuals during the atmospheric nuclear test program.

DEPARTMENT OF THE ARMY
US ARMY NUCLEAR DEFENSE LABORATORY
EDGEWOOD ARSENAL, MARYLAND 21010

16 JUN 1966

IN REPLY REFER TO:

AMXND-E

15 MAR 1966

SUBJECT: Errata for NDL-TR-53 (AD 365-419), INITIAL GAMMA DATA FROM
NUCLEAR WEAPON TESTS (U), dated July 1965

TO: Distribution

It is requested that changes to NDL-TR-53 be made as indicated below.

a. (C-FRD) Page 19, Table 1.1. Correct yields as follows:

Greenhouse George	
Plumbbob Boltzman	11.5 kt
Hardtack Humboldt	7.8×10^{-3} kt
Fish Bowl King Fish	

b. (U) Page 44, Table 3.2. Fourth column heading should be "Density". Second column values should be 1112.3 mb, 1009.3 mb and 1007.9 mb.

e. (U) Page 175, Table 3.100. Azimuth symbol for slant ranges of 527, 1014, 1509, 2006, and 2505 yards should be "b" instead of "a".

~~GROUP 1~~
Excluded from automatic down-
grading and declassification

Document consists of 2 pages.
Copy 123 of 165.

NDL-65-SRD-200

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NDL-TR-53 (EX)	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Initial Gamma Data from Nuclear Weapon Tests 1948 through 1962		5. TYPE OF REPORT & PERIOD COVERED
		6. PERFORMING ORG. REPORT NUMBER NDL-TR-53 (EX)
7. AUTHOR(s) Robert J. Smith Ralph E. Benck Edward E. Lissak		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Nuclear Defense Laboratory Edgewood Arsenal, Maryland		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE July 1965
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; unlimited distribution.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This report has had the classified information removed and has been republished in unclassified form for public release. This work was performed by Kaman Tempo under contract DNA001-83-C-0286 with the close cooperation of the Classification Management Division of the Defense Nuclear Agency.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Atmospheric Nuclear Tests Gamma-Dose Measurements Shield Attenuation Neutron Interaction with Soil Neutron Flux Data		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The data presented are a compilation of all reported initial gamma measurements made by the Department of Defense and other agencies, from Operation Sandstone (1948) through Operation Fish Bowl (1962). Where neutron data are available, the gamma measurements are corrected for the direct effect of the neutrons on the detector as well as on the detector's environment. Shield attenuation of the gamma dose was taken into account. Gamma-dose-times-distance-squared, versus distance for shot conditions, is graphically presented.		

AMXND-E

15 March 1966

SUBJECT: Errata for NDL-TR-53 (AD 365-419), INITIAL GAMMA DATA FROM
NUCLEAR WEAPON TESTS (U), dated July 1965

f. (U) Page 179, Table 3.102. Change heading of the third column
to "Film Type" and add the following column:

Uncorrected Gamma Dose

r

5550

1440

509

214

g. (SRD) Page 194, Table 3.111. Correct fission yields and
HE thicknesses as follows:

<u>Shot</u>	<u>HE Thickness</u> cm
Mora	
Lea	
Socorro	

h. (U) Page 205, Table 3.119. Height of burst for Shot Johnie
Boy should be minus 192 feet.

i. (U) Pages 206, 209, 211, and 213. Tables 3.121, 3.122, 3.123,
and 3.124; units for slant range should be "feet".



HAROLD E. SHAW
Lt Col, CmlC
Commanding

ABSTRACT

(U) The data presented are a compilation of all reported initial gamma measurements made by the Department of Defense and other agencies, from Operation Sandstone (1948) through Operation Fish Bowl (1962). Where neutron data are available, the gamma measurements are corrected for the direct effect of the neutrons on the detector as well as on the detector's environment. Shield attenuation of the gamma dose was taken into account. Gamma-dose-times-distance-squared, versus distance for shot conditions, is graphically presented.

FOREWORD

(U) This is the fifth and final report dealing with the general topic of neutron effects on gamma detectors. It presents a compilation of neutron-corrected, initial-gamma-dose measurements obtained by Department of Defense and other agencies, from Operation Sandstone (1948) through Operation Fish Bowl (1962).

(U) This work was authorized under DASA NWER Subtask C6.007, Neutron Effects on Gamma Detectors and DASA NWER Subtask C6.042, Initial Radiation Studies. This compilation and correction of initial gamma data was started in October 1961 and completed in February 1964.

CONTENTS

	Page
1. INTRODUCTION	
1.1 Objective	17
1.2 Background.	17
2. PROCEDURE	
2.1 General	20
2.2 Treatment of Neutron Flux Data.	22
2.3 Neutron Sensitivity of Gamma Detectors.	22
2.4 Detector Shield Correction.	25
2.5 Interactions of Neutrons with Soil.	25
2.6 Comparison of LASL and ESL Film Data.	27
3. RESULTS	
3.1 Operation Sandstone	28
3.2 Operation Ranger.	28
3.3 Operation Greenhouse.	29
3.4 Operation Buster-Jangle	30
3.5 Operation Tumbler-Snapper	31
3.6 Operation Ivy	31
3.7 Operation Upshot-Knothole	32
3.8 Operation Castle.	34
3.9 Operation Teapot.	34
3.10 Operation Redwing	36
3.11 Operation Plumbbob.	37
3.12 Operation Hardtack.	39
3.13 Operation Sun Beam.	41
3.14 Operation Fish Bowl	42

APPENDIX

REFERENCES

TABLES

1.1 Nuclear Devices for Which Initial Gamma Measurements are Reported.	19
2.1 Recommended Dosimeters ranges	21
2.2 Neutron Activation Detectors.	23

TABLES (Continued)

2.3	Neutron Sensitivities of Dosimeters	24
2.4	Gamma Dose From Various Shields Subjected to a Thermal Neutron Flux of 1×10^{12} n/cm ² and a Fast Neutron Flux in Each Energy Interval of 1×10^{12} n/cm ²	26
3.1	Shot Information - Operation Sandstone	44
3.2	Meteorological Data - Operation Sandstone	44
3.3	Initial Gamma Dose Data - Operation Sandstone - Shot X-ray	45
3.4	Initial Gamma Dose Data - Operation Sandstone - Shot Yoke	45
3.5	Initial Gamma Dose Data - Operation Sandstone - Shot Zebra	48
3.6	Shot Information - Operation Ranger	50
3.7	Meteorological Data - Operation Ranger	50
3.8	Initial Gamma Dose Data - Operation Ranger - Shot Able	51
3.9	Initial Gamma Dose Data - Operation Ranger - Shot Baker I	51
3.10	Initial Gamma Dose Data - Operation Ranger - Shot Easy	56
3.11	Initial Gamma Dose Data - Operation Ranger - Shot Baker II	56
3.12	Initial Gamma Dose Data - Operation Ranger - Shot Fox	61
3.13	Shot Information - Operation Greenhouse	61
3.14	Meteorological Data - Operation Greenhouse	64
3.19	Shot Information - Operation Buster-Jangle	71
3.20	Meteorological Data - Operation Buster Jangle	71

TABLES (Continued)

3.21	Initial Gamma Dose Data - Operation Buster-Jangle Shot Baker	72
3.22	Initial Gamma Dose Data - Operation Buster-Jangle Shot Charlie	74
3.23	Initial Gamma Dose Data - Operation Buster-Jangle Shot Dog	77
3.24	Initial Gamma Dose Data - Operation Buster-Jangle Shot Easy.	80
3.25	Initial Gamma Dose Data - Operation Buster-Jangle Surface Shot	83
3.26	Initial Gamma Dose Data - Operation Buster-Jangle Underground Shot	83
3.27	Shot Information - Operation Tumbler-Snapper	84
3.28	Meteorological Data - Operation Tumbler-Snapper. . .	84
3.29	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 2 (Tumbler II).	85
3.30	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 3 (Tumbler III).	85
3.31	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 4 (Snapper I).	88
3.32	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 5 (Snapper II).	88
3.33	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 6 (Snapper III).	91
3.34	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 7 (Snapper IV).	91
3.35	SCEL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 8 (Snapper V).	94
3.36	LASL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 2 (Tumbler II).	96
3.37	LASL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 3 (Tumbler III).	96
3.38	LASL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 4 (Snapper I).	97
3.39	LASL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 5 (Snapper II).	97
3.40	LASL Initial Gamma Dose Data - Operation Tumbler- Snapper - Shot 6 (Snapper III).	98

TABLES (Continued)

3.41	LASL Initial Gamma Dose Data - Operation Tumbler-Snapper - Shot 7 (Snapper IV)	98
3.42	LASL Initial Gamma Dose Data - Operation Tumbler-Snapper - Shot 8 (Snapper V).	99
3.43	Shot Information - Operation Ivy.	100
3.44	Meteorological Data - Operation Ivy	100
3.45	Initial Gamma Dose Data - Operation Ivy - Shot Mike	101
3.46	Initial Gamma Dose Data - Operation Ivy - Shot King.	101
3.47	Shot Information - Operation Upshot-Knothole.	103
3.48	Meteorological Data - Operation Upshot-Knothole	103
3.49	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 1 (Annie)	104
3.50	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 2 (Nancy)	104
3.51	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 3 (Ruth).	107
3.52	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 5 (Ray)	107
3.53	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 6 (Badger).	110
3.54	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 7 (Simon)	110
3.55	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 8 (Encore).	113
3.56	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 9 (Harry)	115
3.57	SCEL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 10 (Grable)	117
3.58	LASL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 5	119
3.59	LASL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 6	120
3.60	LASL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 10.	121
3.61	LASL Initial Gamma Dose Data - Operation Upshot-Knothole - Shot 11.	122
3.62	Shot Information - Operation Castle	124
3.63	Meteorological Data - Operation Castle.	124

TABLES (Continued)

3.64	Initial Gamma Dose - Operation Castle	125
3.65	Shot Information - Operation Teapot	128
3.66	Meteorological Data - Operation Teapot.	129
3.67	Initial Gamma Dose Data - Operation Teapot - Shot 1 (Wasp)	130
3.68	Initial Gamma Dose Data - Operation Teapot - Shot 2 (Moth)	130
3.69	Initial Gamma Dose Data - Operation Teapot - Shot 3 (Tesla)	133
3.70	Initial Gamma Dose Data - Operation Teapot - Shot 4 (Turk)	133
3.71	Initial Gamma Dose Data - Operation Teapot - Shot 5 (Hornet)	136
3.72	Initial Gamma Dose Data - Operation Teapot - Shot 6 (Bee)	136
3.73	Initial Gamma Dose Data - Operation Teapot - Shot 8 (Apple I)	139
3.74	Initial Gamma Dose Data - Operation Teapot - Shot 9 (Wasp Prime)	139
3.75	Initial Gamma Dose Data - Operation Teapot - (High Altitude)	142
3.76	Initial Gamma Dose Data - Operation Teapot - Shot 11 (Post)	142
3.77	Initial Gamma Dose Data - Operation Teapot - Shot 12 (Met)	145
3.78	Initial Gamma Dose Data - Operation Teapot - Shot 13 (Apple II)	145
3.79	Initial Gamma Dose Data - Operation Teapot - (Zucchini)	148
3.80	Shot Information - Operation Redwing	150
3.81	Meteorological Data - Operation Redwing	150
3.83	Initial Gamma Dose Data - Operation Redwing - Shot Zuni	153

TABLES (Continued)

3.90	Initial Gamma Dose Data - Operation Redwing - Shot Tewa	162
3.91	Shot Information - Operation Plumbbob	165
3.92	Meteorological Data - Operation Plumbbob.	166
3.93	Initial Gamma Dose Data - Operation Plumbbob - Shot Boltzmann.	167
3.94	Initial Gamma Dose Data - Operation Plumbbob - Shot Franklin	169
3.95	Initial Gamma Dose Data - Operation Plumbbob - Shot Wilson	169
3.96	Initial Gamma Dose Data - Operation Plumbbob - Shot Priscilla.	172
3.97	Initial Gamma Dose Data - Operation Plumbbob - Shot Hood	172
3.98	Initial Gamma Dose Data - Operation Plumbbob - Shot Diablo	175
3.99	Initial Gamma Dose Data - Operation Plumbbob - Shot Kepler	175
3.100	Initial Gamma Dose Data - Operation Plumbbob - Shot Owens.	175
3.101	Initial Gamma Dose Data - Operation Plumbbob - Shot Stokes	179
3.102	Initial Gamma Dose Data - Operation Plumbbob - Shot Shasta	179
3.103	Initial Gamma Dose Data - Operation Plumbbob - Shot Doppler.	179
3.104	Initial Gamma Dose Data - Operation Plumbbob - Shot Franklin Prime	183
3.105	Initial Gamma Dose Data - Operation Plumbbob - Shot Smokey	183
3.106	Initial Gamma Dose Data - Operation Plumbbob - Shot Galileo.	186

TABLES (Continued)

3.107	Initial Gamma Dose Data - Operation Plumbbob - Shot LaPlace	188
3.108	Initial Gamma Dose Data - Operation Plumbbob - Shot Fizeau.	188
3.109	Initial Gamma Dose Data - Operation Plumbbob - Shot Whitney	191
3.110	Initial Gamma Dose Data - Operation Plumbbob - Shot Charleston.	191
3.111	Shot Information - Operation Hardtack.	194
3.112	Meteorological Data - Operation Hardtack	194
3.114	Initial Gamma Dose Data - Operation Hardtack - Shot Mora.	197
3.115	Initial Gamma Dose Data - Operation Hardtack - Shot Lea	197
3.116	Initial Gamma Dose Data - Operation Hardtack - Shot Hamilton.	200
3.117	Initial Gamma Dose Data - Operation Hardtack - Shot Socorro	200
3.118	Initial Gamma Dose Data - Operation Hardtack - Shot Humboldt.	203
3.119	Shot Information - Operation Sun Beam.	205
3.120	Meteorological Data - Operation Sun Beam	205
3.122	Initial Gamma Dose Data - Operation Sun Beam - Shot Johnnie Boy.	209

FIGURES

3.1	Operation Sandstone - Shot X-ray - Corrected gamma-dose-times-slant-range-squared versus slant-range	46
3.2	Operation Sandstone - Shot Yoke - Corrected gamma-dose-times-slant-range-squared versus slant-range	47
3.3	Operation Sandstone - Shot Zebra - Corrected gamma-dose-times-slant-range-squared versus slant-range	49
3.4	Operation Ranger - Shot Able (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	52
3.5	Operation Ranger - Shot Able (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	53
3.6	Operation Ranger - Shot Baker I (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	54
3.7	Operation Ranger - Shot Baker I (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	55
3.8	Operation Ranger - Shot Easy (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	57
3.9	Operation Ranger - Shot Easy (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	58
3.10	Operation Ranger - Shot Baker II (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	59
3.11	Operation Ranger - Shot Baker II (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	60
3.12	Operation Ranger - Shot Fox (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	62
3.13	Operation Ranger - Shot Fox (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	63

FIGURES (Continued)

3.15	Operation Greenhouse - Shot Easy - Corrected gamma-dose-times-slant-range-squared versus slant-range	67
3.18	Operation Buster-Jangle - Shot Baker - Corrected gamma-dose-times-slant-range-squared versus slant-range	73
3.19	Operation Buster-Jangle - Shot Charlie - Corrected gamma-dose-times-slant-range-squared versus slant-range	76
3.20	Operation Buster-Jangle - Shot Dog - Corrected gamma-dose-times-slant-range-squared versus slant-range	79
3.21	Operation Buster-Jangle - Shot Easy - Corrected gamma-dose-times-slant-range-squared versus slant-range	82
3.22	Operation Tumbler-Snapper - Shot 2 (Tumbler II) - SCEL corrected gamma-dose-times-slant-range-squared versus slant-range	86
3.23	Operation Tumbler-Snapper - Shot 3 (Tumbler III) - SCEL corrected gamma-dose-times-slant-range-squared versus slant-range	87
3.24	Operation Tumbler-Snapper - Shot 4 (Snapper I) - SCEL corrected gamma-dose-times-slant-range-squared versus slant-range	89
3.25	Operation Tumbler-Snapper - Shot 5 (Snapper II) - SCEL corrected gamma-dose-times-slant-range-squared versus slant-range	90
3.26	Operation Tumbler-Snapper - Shot 6 (Snapper II) - SCEL corrected gamma-dose-times-slant-range-squared versus slant-range	92

FIGURES (Continued)

3.27	Operation Tumbler-Snapper - Shot 7 (Snapper IV) - SCEL corrected gamma-dose-times-slant-range- squared versus slant-range	93
3.28	Operation Tumbler-Snapper - Shot 8 (Snapper V) SCEL corrected gamma-dose-times-slant-range- squared versus slant-range	95
3.29	Operation Ivy - Shot King - Corrected gamma-dose- times-slant-range-squared versus slant-range . . .	102
3.30	Operation Upshot-Knothole - Shot 1 (Annie) - Corrected gamma-dose-times-slant-range-squared versus slant-range	105
3.31	Operation Upshot-Knothole - Shot 2 (Nancy) - Corrected gamma-dose-times-slant-range-squared versus slant-range	106
3.32	Operation Upshot-Knothole - Shot 3 (Ruth) - Uncor- rected gamma-dose-times-slant-range-squared versus slant-range	108
3.33	Operation Upshot-Knothole - Shot 5 (Ray) - Cor- rected gamma-dose-times-slant-range-squared versus slant-range	109
3.34	Operation Upshot-Knothole - Shot 6 (Badger) - Corrected gamma-dose-times-slant-range-squared versus slant-range	111
3.35	Operation Upshot-Knothole - Shot 7 (Simon) - Uncorrected gamma-dose-times-slant-range- squared versus slant-range	112
3.36	Operation Upshot-Knothole - Shot 8 (Encore) - Corrected gamma-dose-times-slant-range-squared versus slant-range	114
3.37	Operation Upshot-Knothole - Shot 9 (Harry) - Corrected gamma-dose-times-slant-range-squared versus slant-range	116
3.38	Operation Upshot-Knothole - Shot 10 (Grable) - Corrected gamma-dose-times-slant-range-squared versus slant-range	118
3.39	Operation Upshot-Knothole - Shot 11 (Climax) - Uncorrected gamma-dose-times-slant-range- squared versus slant-range	123
3.40	Operation Castle - Shot 3 (Koon) - Gamma-dose-times- slant-range-squared versus slant-range	126

FIGURES (Continued)

3.41	Operation Castle - Shot 6 (Nectar) - Gamma dose-times-slant-range-squared versus slant-range . . .	127
3.42	Operation Teapot - Shot 1 (Wasp) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	131
3.43	Operation Teapot - Shot 2 (Moth) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	132
3.44	Operation Teapot - Shot 3 (Tesla) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	134
3.45	Operation Teapot - Shot 4 (Turk) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range.	135
3.46	Operation Teapot - Shot 5 (Hornet) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	137
3.47	Operation Teapot - Shot 6 (Bee) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	138
3.48	Operation Teapot - Shot 8 (Apple I) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	140
3.49	Operation Teapot - Shot 9 (Wasp Prime) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	141
3.50	Operation Teapot - Shot 10 (High-Altitude) - Partially corrected gamma-dose-times-slant-range-squared versus slant-range	143
3.51	Operation Teapot - Shot 11 (Post) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	144
3.52	Operation Teapot - Shot 12 (Met) - Corrected gamma-dose-times-slant-range-squared versus slant-range.	146
3.53	Operation Teapot - Shot 13 (Apple II) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	147
3.54	Operation Teapot - Shot 14 (Zucchini) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	149

FIGURES (Continued)

3.56	Operation Redwing - Shot Zuni - Uncorrected gamma-dose-times-slant-range-squared versus slant- range	154
3.64	Operation Plumbbob - Shot Boltzmann - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	163
3.65	Operation Plumbbob - Shot Franklin - Corrected gamma-dose-times-slant-range-squared versus slant-range	170
3.66	Operation Plumbbob - Shot Wilson - Corrected gamma- dose-times-slant-range-squared versus slant- range	171
3.67	Operation Plumbbob - Shot Priscilla - Corrected gamma-dose-times-slant-range-squared versus slant-range	173
3.68	Operation Plumbbob - Shot Hood - Corrected gamma- dose-times-slant-range-squared versus slant- range	174

FIGURES (Continued)

3.69	Operation Plumbbob - Shot Diablo - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	176
3.70	Operation Plumbbob - Shot Kepler - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	177
3.71	Operation Plumbbob - Shot Owens - Corrected gamma-dose-times-slant-range-squared versus slant- range	178
3.72	Operation Plumbbob - Shot Stokes - Corrected gamma-dose-times-slant-range-squared versus slant-range	180
3.73	Operation Plumbbob - Shot Shasta - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	181
3.74	Operation Plumbbob - Shot Dopler - Corrected gamma-dose-times-slant-range-squared-versus slant-range	182
3.75	Operation Plumbbob - Shot Franklin Prime - Corrected gamma-dose-times-slant-range- squared versus slant-range.	184
3.76	Operation Plumbbob - Shot Smokey - Corrected and Uncorrected gamma-dose-times-slant-range- squared versus slant-range.	185
3.77	Operation Plumbbob - Shot Galileo - Uncorrected gamma-dose-times-slant-range-squared versus slant-range	187
3.78	Operation Plumbbob - Shot LaPlace - Corrected gamma-dose-times-slant-range-squared versus slant- range	189
3.79	Operation Plumbbob - Shot Fizeau - Corrected gamma-dose-times-slant-range-squared versus slant- range	190
3.80	Operation Plumbbob - Shot Whitney - Uncorrected gamma-dose-times-slant-range-squared versus slant- range	203
3.81	Operation Plumbbob - Shot Charleston - Uncorrected gamma-dose-times-slant-range-squared versus slant- range	204

FIGURES (Continued)

3.83	Operation Hardtack - Shot Mora - Corrected gamma-dose-times-slant-range-squared versus slant-range.	198
3.84	Operation Hardtack - Shot Lea - Corrected gamma-dose-times-slant-range-squared versus slant-range.	199
3.85	Operation Hardtack - Shot Hamilton - Corrected gamma-dose-times-slant-range-squared versus slant-range.	201
3.86	Operation Hardtack - Shot Socorro - Corrected gamma-dose-times-slant-range-squared versus slant-range.	202
3.87	Operation Hardtack - Shot Humboldt - Corrected gamma-dose-times-slant-range-squared versus slant-range.	204
3.90	Operation Sun Beam - Shot Johnnie Boy - Corrected gamma-dose-times-slant-range-squared versus slant-range.	210
3.94	Operation Fish Bowl - Shot Star Fish Prime - Uncorrected gamma-dose-times-slant-range-squared-versus slant-range.	218

CHAPTER 1

INTRODUCTION

1.1 OBJECTIVE

(U) The main purpose of this report is to present results of the initial gamma-dose measurements made by Department of Defense (DOD) agencies at nuclear weapon tests and the corrected initial gamma data, rather than to make comparisons or to draw conclusions. Other projects will delve more deeply into these subjects.

1.2 BACKGROUND

(U) A comprehensive report summarizing the data from initial dose measurements (0 to 1 minute after detonation) made at nuclear weapon tests has been needed for some time. The initial gamma dose measurements reported here were made by the following DOD agencies: the US Army Nuclear Defense Laboratory (USANDL), the US Army Signal Research and Development Laboratory (USASRDL), and the Radiological Safety (Rad Safe) Group at the test site. Gamma data which were compiled by the Los Alamos Scientific Laboratory (LASL), the National Bureau of Standards (NBS), and other agencies are presented where DOD data are not available and where the data of such agencies are needed for comparison. Information concerning the detonations for which gamma dose data are available is presented in Table 1.1. The yields quoted are based on current information and may be subject to minor changes.

(U) The Department of Defense did not fully participate in the measurement of gamma dose until Operation Tumbler-Snapper in 1952. Previously, Rad Safe had performed gamma-dose measurements on a one-shot basis during Operation Sandstone in 1948. Gamma dose was measured during Operation Greenhouse by the NBS and during Operations Ranger, Buster-Jangle, and Ivy almost exclusively by LASL. The US Army Signal Corps made gamma-dose measurements at the underground and surface shots during Operation Jangle; however, most of the detectors remained in fallout areas up to 50 hours.

(U) Film has been used at every operation since Sandstone to measure gamma dose. To provide energy independence and electronic equilibrium, various film holders have been used -- the most common being the NBS and LASL holders. In addition, silver-phosphate-glass blocks and needles, chemical-dosimeter systems, and cobalt-glass plates have been used at a number of the operations with varying degrees of success. Biological-type gamma-dosimeters were tested during Operation Greenhouse. However,

the results obtained from all these systems were questioned because of the neutron response of the detector itself, as well as the interaction of neutrons with the shield used to protect the detectors from blast and thermal radiation. In many cases this interaction produced sufficient secondary gamma rays to cause an appreciable increase in the total dose measured by the detector.

(U) This report attempts to rectify this situation by correcting the initial gamma data for direct neutron interaction with the detector, for the interaction of neutrons with the shields, and for the attenuation of the initial gamma rays by the shields. An evaluation of the gamma dose produced by neutron interaction with the ground is also presented but not used as a correction since the ground is part of the fixed environment. To perform this work the USANDL obtained direct neutron interaction factors for available dosimeter films (References 1, 2, and 3) and correction factors for the secondary gamma radiation produced by neutron interactions with shields and soil (References 4 and 5). Direct neutron interaction factors for glass and chemical systems were obtained by other investigators (References 6,7,8,9, and 10). During Operation Sun Beam the theoretical calculations which produced the correction factors for shields and soil were experimentally verified (Reference 11).

(U) Recent work has indicated that these gamma dosimeters are dependent upon dose rate and total dose in a complicated fashion (Reference 12). Much more work will be necessary to clarify this situation.

(3-ND TABLE 1.1 INITIAL DEVICES FOR WHICH INITIAL GAMMA MEASUREMENTS ARE REPORTED)

Operation	Year	Test Location	Shot Designation	Name of Device	Yield kt
SANDSTONE	1954	Eniwetok	X-ray		36
		Eniwetok	Yoke		49
		Eniwetok	Zebra		18
RAMMER	1951	Nevada	Able		1.3
		Nevada	Baker I		7.4
		Nevada	Easy		1
		Nevada	Baker II		7.7
		Nevada	Fox		22
GREENHOUSE	1951	Eniwetok	Dog		1.2
		Eniwetok	Easy		1.2
		Eniwetok	George		1.2
BUSTER-JANGLE	1951	Eniwetok	Item		Insignif.
		Nevada	Able		1.05
		Nevada	Baker		1.17
		Nevada	Charlie		30
		Nevada	Dog		18.5
TURNER-SNAPPER	1952	Nevada	Uncle		12.5
		Nevada	Sugar		11.5
		Nevada	Tumbler I		15.8
		Nevada	Tumbler II		13.9
		Nevada	Tumbler III		1.04x10 ⁴
UPSHOT-KUPTHOLE	1953	Nevada	Snapper I		540
		Nevada	Snapper II		17.1
		Nevada	Snapper III		24
		Nevada	Snapper IV		0.20
		Nevada	Snapper V		0.21
CASTLE	1954	Eniwetok	Mike		29
		Eniwetok	King		45
		Nevada	1 (Annie)		26
		Nevada	2 (Betsy)		32.3
		Nevada	3 (Bobby)		15
FISH H.M.L.	1962	Nevada	6 (Bobby)		60
		Nevada	7 (Simon)		150
		Nevada	8 (Hector)		7.0x10 ³
		Nevada	9 (Hector)		1.7x10 ³
		Nevada	10 (Grable)		1.7x10 ³
SUN BEAM	1962	Nevada	11 (Climax)		60
		Nevada	Koon		150
		Nevada	Union		7.0x10 ³
		Nevada	Hector		1.7x10 ³
		Nevada	Star Fish		1.7x10 ³

TABLE 1.1 (Continued)

Operation	Year	Test Location	Shot Designation	Name of Device	Yield kt
TEAROT	1955	Nevada	1 (Wasp)		1.2
		Nevada	2 (Moth)		2.4
		Nevada	3 (Teal)		6.4
		Nevada	4 (Tusk)		44
		Nevada	5 (Hornet)		3.6
		Nevada	6 (Bee)		8.1
		Nevada	8 (Apple I)		14.2
		Nevada	9 (Wasp)		3.2
		Nevada	10 (High Altitude)		3.1
		Nevada	11 (Post)		1.45
REDWING	1956	Nevada	12 (Net)		22.5
		Nevada	13 (Apple II)		28
		Nevada	14 (Zucchini)		28
		Eniwetok	Tum		1.2x10 ⁴
		Eniwetok	Blackfoot		1.2x10 ⁴
		Eniwetok	Kickapoo		1.2x10 ⁴
		Eniwetok	Zuni		1.2x10 ⁴
		Eniwetok	Flathead		1.2x10 ⁴
		Eniwetok	Dakota		1.2x10 ⁴
		Eniwetok	Nevado		1.2x10 ⁴
PLUMBBOB	1957	Nevada	Boitman		40-11.5
		Nevada	Franklin		0.16
		Nevada	Wilson		10.3
		Nevada	Hood		71
		Nevada	Owens		9.7
		Nevada	Laplace		1.22
		Nevada	Priscilla		36.6
		Nevada	Diablo		17
		Nevada	Kepler		10.3
		Nevada	Stokes		19
HANTACK	1958	Nevada	Shasta		16.5
		Nevada	Doppler		10.7
		Nevada	Franklin		4.7
		Nevada	Prime		44
		Nevada	Smiley		11.5
		Nevada	Calliope		11.4
		Nevada	Piscieu		11.4
		Nevada	Whitney		18.5
		Nevada	Charleston		11.4
		Nevada	Flg		1.2x10 ⁴
SUN BEAM	1962	Nevada	More		1.65
		Nevada	Less		19x10 ³
		Nevada	Hamilton		22x10 ³
		Nevada	Shapiro		1.65
		Nevada	Humboldt		1.65
		Nevada	Small Boy		1.65
		Nevada	Little		1.65
		Nevada	Feller I		1.65
		Nevada	Feller II		1.65
		Nevada	Johnie Boy		1.65
FISH H.M.L.	1962	Johnson Is.	Star Fish		1.65
		Johnson Is.	Prime		1.65
		Johnson Is.	Blue Gill		1.65
		Johnson Is.	Triple Prime		1.65
		Johnson Is.	King Fish		1.65

CHAPTER 2

PROCEDURE

2.1 GENERAL

(U) The gamma data were taken directly from weapon test (WT) reports for each operation. Actually the reported gamma dose data are not strictly initial gamma data but represent gamma doses received up to the time of recovery of the detectors, often hours after detonation. Recent innovations have greatly reduced the exposure time of the gamma detectors, but during the earlier operations the gamma detectors remained in the field for lengthy and often unreported times. Most of the detectors were exposed upwind of the detonation to minimize the fallout-gamma contribution. Table 2.1 gives the recommended ranges of most of the dosimeters.

(U) Dosimeter films were the major gamma-measuring system used at weapon tests. Films seem to be sensitive to every variable known to mankind, and they may be sensitive to some not known. Use of film as a gamma dosimeter for controlled laboratory experiments presents some difficulties in interpreting the data; but use of film at weapon tests, where little control is maintained and where the quality and type of radiation are unusual, presents extreme difficulties. The NBS and aluminum-wood (AW) film badges have minimized but not eliminated energy dependence of the films. Minimization of the field variables has progressed from test to test so that now it is believed that the gamma dose can be interpreted to within 25-35 percent.

(U) Direct line of sight to the detonation point was assumed for all gamma and neutron data. Where the gamma data overlapped the dosage range of two films, an educated guess was made as to which film was used unless the original data were specified. Since the protective shields were not always adequately described, a number of assumptions concerning size, thickness, and composition had to be made in some cases. Factors for direct neutron interaction with film were determined only for film encased in the NBS holder. These interaction factors were assumed to be applicable also to the AW LASL film holder. Very limited experimental data indicate that the above assumption is reasonable, at least for thermal neutrons. Finally, the neutron-interaction factors obtained for the newer films were assumed to be applicable to the obsolete films of the same dose range.

(U) TABLE 2.1 RECOMMENDED DOSIMETER RANGES

Dosimeter Type	Recommended Range
	r
Emulsion 502	0.3 - 10^a
Emulsion 508	0.3 - 10^a
Emulsion 510	10 - 35^a
Emulsion 606	35 - 2500^a
Emulsion 1290 (Adlux)	35 - 2500^a
Emulsion 548-0 (double coat)	1000 - $10,000^a$
Emulsion 548-0 (single coat)	2500 - $50,000^a$
Emulsion 649	2500 - $50,000^a$
AgPO ₃ glass	10 - $10,000^b$
AgPO ₃ glass	10 - $100,000^c$
Cobalt plates	10^4 - 10^3
Thermoluminescent	0.005 - 10,000
Chloroform	1 - $\sim 100,000$
Tetrachloroethylene	1 - 10^6^d

^aRange depends upon method of processing and calibration procedure.
LASL regularly used 548 emulsion only to 30,000r whereas the Signal Corps used the 548 emulsion to 80,000r.

^bGlass that has not been heat-annealed.

^cGlass that has been heat-annealed.

^dThis is the overall useful range. To cover the range, inhibitors must be added and each combination of inhibitor and tetrachloroethylene has its own useful range.

2.2 TREATMENT OF NEUTRON FLUX DATA

(U) To obtain neutron data at stations where such data were not reported, graphs of neutron-flux-times-slant-range-squared versus slant-range were prepared. Extrapolations were made of the curves to the distances of interest.

2.3 NEUTRON SENSITIVITY OF GAMMA DETECTORS

(U) The neutron sensitivities of the gamma detectors vary with neutron energy as shown in Table 2.3. The reliability of the fast-neutron film sensitivities can not be estimated since the values are taken from single measurements. To use the fast-neutron sensitivities of those dosimeters

(U) TABLE 2.2 NEUTRON ACTIVATION DETECTORS

Detector	Reaction	Products	Neutron Energy Measured
Au ¹⁹⁷	n, γ	Au ¹⁹⁸	≤ 0.3 eV
As ⁷⁵	n, γ	As ⁷⁶	≤ 0.3 eV
Pu ²³⁹	Fission	Mixed fission products	> 10 keV
Np ²³⁷	Fission	Mixed fission products	> 0.63 MeV
U ²³⁸	Fission	Mixed fission products	> 1.5 MeV

(U) TABLE 2.3 NEUTRON SENSITIVITIES OF DOSIMETERS

Dosimeter	Thermal	Neutron Energy (MeV)					
		1	2	4	6	8	14
	$10^9 (n/cm^2)/r$	$10^9 (n/cm^2)/r$					
Emulsion 508	3.6 ± 0.90	110	75	27	20	6.5	
Emulsion 510	4.8 ± 1.2	10	5.5	3.8	2.9	1.6	0.83
Emulsion 1290	4.9 ± 1.2	18	11	5.5	4.0	2.5	1.2
Emulsion 502	4.0 ± 1.0	80	40	20	15	7.5	
Emulsion 510	4.6 ± 1.15	20	9.5	5.0	3.0	2.1	
Emulsion 606	4.4 ± 1.1	28	12	9.0	6.5	2.5	1.2
Emulsion 649	40 ± 10	1.9 ^a ± 0.48					
Emulsion 548	8.8 ± 2.2	2.9 ^a ± 1.0					
AgPO ₃ glass	3.0 ^b ± 0.38	60 ^a					
Cobalt plates	0.14 ^b ± 0.04	c-2 ^a					
Thermoluminescent	5.0	5.7 ^a					
Chloroform	1.5	d					
Tetrachloroethylene	5.9	~ 500					

^aValue is an average for neutrons having thresholds greater than 10 keV.^bUnpublished data.^cEstimated to be 5×10^{10} .^dNo definite value reported.

for which values at only 1 MeV are available, the assumption must be made that the average value of the weapon's fast-neutron spectrum is 1 MeV. At stations where the full set of neutron activation detectors was not available, an average energy of 1 MeV for fast neutrons was assumed and only the neutron sensitivities at 1 MeV were used for any gamma detectors exposed. Actually the neutron sensitivity values obtained for emulsions 548 and 649 and the thermoluminescent dosimeter were obtained by exposing them to a fission spectrum and reporting the values at an average energy of 1 MeV.

2.4 DETECTOR SHIELD CORRECTIONS

(U) The corrections for the gamma dose produced by neutron interactions with a number of popular shields have been reported in Reference 4 and are reproduced in Table 2.4. The contributions of thermal neutrons (radiative capture) and fast neutrons (inelastic scattering) have been taken into account. Induced activity in the shield is neglected (except for aluminum shields), since calculations have shown that its contribution is less than two percent. The inelastic scattering cross sections below 0.63 MeV are negligible.

(U)(~~S-RO~~) As the distance from ground zero increases, the gamma spectrum hardens (Reference 17) and the attenuation factor for shields would be expected to decrease. For surface and low-air bursts of less than 500 kt, the average gamma energy is considered to be 1 MeV at distances from ground zero to 1000 yards, 3 MeV from 1000 to 3000 yards, and 5 MeV at greater than 3000 yards. The spectrum of gamma radiation from weapons greater than 500 kt is expected to be considerably softer than that for low-yield weapons, since the major portion of the dose is delivered by the hydrodynamically enhanced fission-product radiation. For these weapons, the average gamma energy is considered to be 1 MeV up to 2000 yards from ground zero and 3 MeV for greater distances. The shield attenuation factors are reported in the initial gamma dose tables for each shot.

2.5 INTERACTION OF NEUTRONS WITH SOIL

(U) The gamma contribution from the interaction of neutrons with the soil is reported but has not been used to correct the gamma data, inasmuch as the soil is part of the fixed environment. By means of the method outlined in Reference 5, the gamma doses were calculated for various soils for fluxes of 1×10^{12} thermal neutrons per square centimeter

(U) TABLE 2.4 GAMMA DOSE FROM VARIOUS SHIELDS SUBJECTED TO A THERMAL NEUTRON FLUX OF 1×10^{12} n/cm² AND A FAST NEUTRON FLUX IN EACH ENERGY INTERVAL OF 1×10^{12} n/cm²

Shield	Gamma Dose for Various Neutron Energies					
	Thickness cm	Thermal r	0.63-1.5 MeV		1.5-3.0 MeV	
			r	r	r	Over 3 MeV
Cast Iron Condulet	0.368	200	3.29	10.4	22.5	
Steel Cylinder	0.510	320	5.19	16.2	34.7	
(Emmett Device)						
Steel Pipe Nipple	0.551	340	5.53	17.2	36.7	
Steel Pipe Nipple	0.635	380	6.26	19.5	41.4	
Steel Pipe Nipple	0.762	430	7.37	22.5	47.3	
Steel Pipe Nipple	1.142	630	9.91	30.4	62.8	
Aluminum Can	0.159	3.8	0.130	1.15	0.699	
Aluminum Can	0.318	7.6	0.260	2.26	1.34	
Iron Stakes	0.635	190	3.13	9.75	20.8	

and 1×10^{12} fast neutrons per square centimeter. To obtain the soil gamma contribution at specific slant ranges for the various detonations, the actual thermal- and fast-neutron fluxes, the fraction of the neutrons actually absorbed by the soil, and the build-up factor had to be taken into account. Details are given in the Appendix.

2.6 COMPARISON OF LASL AND ESL FILM DATA

(U) A comparison of the LASL film data with the Evans Signal Laboratory (ESL) film data shows that the LASL data are consistently higher than the ESL data. An investigation into the cause of these discrepancies was carried out by LASL during Operation Teapot and reported by Storm and Bemis (Reference 18), who recommended that all the LASL data be lowered by 13 percent because of calibration difficulties. In comparison with energy-independent ion chambers, the individual emulsion results obtained by use of the LASL holder were high by factors varying from 10 to 20 percent, and the individual emulsion results obtained by use of the NBS holder were low by factors varying from 7 to 19 percent. The 13-percent calibration factor is used in this report to correct the LASL film data. Describing the LASL film data in this report as uncorrected, means that the data have not been corrected for neutron effects but have been corrected for calibration error. The individual emulsion corrections are not applied in this report, since they are applicable only at distances of 1700 to 3300 yards, and to the type of shots for which they were measured. The individual emulsion variation is assumed to be due to the energy dependence of the emulsion: the emulsions in the LASL holder are more sensitive to the lower-energy gamma rays than are the emulsions in the NBS holder. Since the gamma spectrum is softer at distances closer to ground zero, the correction factors should be different. Currently the average between the LASL and ESL gamma data appears to present a good estimate of the gamma dose.

(U) An example of the calculations used to obtain the correction factors is presented in the Appendix. Formulae for correcting the data to other air densities are also presented in the Appendix.

(U) All shot information was obtained from References 19 and 20. Unless otherwise specified, the meteorological data were obtained at ground level. The meteorological data tables include slant-range-correction factors and dose-correction factors as well as temperature, pressure, and density values.

CHAPTER 3

RESULTS

3.1 OPERATION SANDSTONE

(U) Operation Sandstone, conducted at the Pacific Proving Grounds (PPG) during April and May 1948, consisted of three tower shots. A summary of the shot information is presented in Table 3.1 and the meteorological conditions at shot time are given in Table 3.2.

(U) The gamma measurements were performed by Rad Safe (Task Group 7.6) with film badges (Reference 21). Six film types covering the range from 0.05 to 22,500 r were packaged in lightproof packs with a 1/32-inch lead cross over the front, and sealed in an aluminum-foil jacket. The film badges were attached to 2x2x3/16-inch angle-iron stakes at distances of less than 1000 yards and to 1x1x3/16-inch angle-iron stakes at distances of greater than 1000 yards. Energy dependence of the film badge was poor, since excessive response to radiation below 300 keV was noted. All the film badges remained in the field for 12 to 30 hours after detonation, generally in the upwind direction. Residual contamination was estimated from field survey data to be negligible as compared to the film readings.

(U) Neutron-flux measurements were made by Los Alamos Group LAJ-3 with threshold detectors (Reference 13). Since no plutonium data were available, the total fast-neutron flux was calculated as described in Chapter 2.

(U) The gamma data and corrections are presented in Tables 3.3, 3.4, and 3.5. Figures 3.1, 3.2, and 3.3 show the corrected gamma-dose-time-the-slant-distance-squared as a function of slant distance.

3.2 OPERATION RANGER

(U) Operation Ranger, the first operation at the Nevada Test Site (NTS), was conducted during January and February 1951 and consisted of five airdrops. Shot information is summarized in Table 3.6, and meteorological data are presented in Table 3.7.

(U) Gamma measurements were obtained with film dosimeters by the Rad Safe group of LASL for all the shots (Reference 22). Three film types covering the range of 0.1 to 3000 r were packaged in a lightproof paper jacket with a 1/8-inch lead clip placed over each unit, sealed in a plastic

jacket, and placed between two 1/2-inch wood blocks which were held together by an aluminum box to approximate the more recent AW film badge. The film badge was attached to angle-iron stakes, the dimensions of which were not reported. Two lines, 90° apart, were instrumented: Generator Road ran due south and Access Road ran due west. Recovery was effected 5 to 6 hours after detonation; but, since no local fallout was present, recovery time was not critical.

(U) Thermal-neutron measurements were made by LASL with gold detectors (Reference 13). No fast-neutron measurements were made. The sulfur-neutron flux for Shots Able and Fox might have been estimated if the gold-neutron data from these shots had been found to be comparable to the gold-neutron data from the similar Shots Tumbler II and Buster Dog. However, since the gold-neutron data agreed only within a factor of two, estimation of the sulfur-neutron flux by this method would be inaccurate.

(U) The uncorrected gamma data are presented in Tables 3.8 thru 3.12, and the uncorrected gamma-dose-times-slant-distance-squared versus slant distance are shown in Figures 3.4 thru 3.13.

3.3 OPERATION GREENHOUSE

(U) Operation Greenhouse consisted of four tower shots detonated at the PPG during April and May 1951. A summary of the shot information is presented in Table 3.13, and the meteorological conditions at shot time are given in Table 3.14.

(U) The gamma measurements, which consisted of the use of films encased in NBS holders, were obtained by the NBS (Reference 23). Four films were used to cover the range of 0.1 to 80,000 r, but one -- the Eastman 5102 positive -- was used as a performance check of the DuPont 605. The NBS film holder consists of thin layers of tin and lead to provide reasonable energy independence, and a thick layer of bakelite to provide electronic equilibrium. The film badge was attached to a 2½-inch pipe. Since no further information concerning the pipe is given, the pipe is assumed to be of steel and 1/8-inch thick. No azimuth was given from ground zero. No corrections for the effect of fallout need to be made since the fallout was negligible (Reference 24).

(U) Neutron-flux measurements were made by LASL, with gold and sulfur detectors (Reference 25). The fast-neutron flux has been again calculated from the sulfur data.

(U) The gamma data and the neutron corrections are presented in Tables 3.15 thru 3.18, and the plots of gamma-dose-times-slant-range-squared versus slant-range are shown in Figures 3.14 thru 3.17.

3.4 OPERATION BUSTER-JANGLE

(U) Operation Buster-Jangle consisted of seven shots at the NTS: the first was a tower shot, the next four were airdrops, the sixth was a surface shot, and the last was an underground shot. A summary of the shot information and the meteorological conditions at shot time is presented in Tables 3.19 and 3.20.

(U) Gamma dose measurements were obtained by LASL (Reference 26) from all detonations except Able and the surface shot, and by Signal Corps Engineering Laboratory (SCEL) (Reference 27) from the surface and underground shots. LASL used a series of five films to cover the range of 0.1 to 30,000 r. The films were exposed in the AW holder attached to an angle-iron stake driven into the ground. Films were recovered from 3 to 6 hours after detonation. No local fallout was recorded for the first five shots (Reference 24).

(U) SCEL also used five films to cover the range from 0.5 to 10,000 r. The films were exposed in NBS holders, but the report does not mention how the film badges were positioned or whether shields were used. Unfortunately, most of the films remained in the fallout field up to 50 hours after detonation. To ascertain the initial gamma dose, the fallout dose from one minute up to recovery time must be subtracted from total dose. The fallout data were obtained from Reference 28.

(U) Neutron-flux measurements were made by LASL (Reference 29) for the first five shots. Gold- and sulfur-neutron data for the surface and underground shots are available in Reference 13.

(U) The gamma doses and the neutron and fallout corrections are presented in Tables 3.21 thru 3.26. Graphs of corrected gamma-dose-times-slant-range-squared versus slant-range are given in Figures 3.18 thru 3.21.

(U) The neutron fluxes for the surface and underground shots at the slant ranges of interest are too small to permit meaningful correction factors to be obtained, and the initial gamma doses obtained by correcting for fallout are very erratic. Therefore, no graphs are presented for these two shots.

3.5 OPERATION TUMBLER-SNAPPER

(U) Operation Tumbler-Snapper was conducted at the NTS during April, May, and June 1952. The operation consisted of four airdrops and four tower shots. The pertinent shot information is presented in Table 3.27, and the meteorological data at shot time are presented in Table 3.28.

(U) The gamma measurements were made by two groups: LASL (Reference 30) and SCEL (Reference 31). LASL used film in the AW holder, mounted on angle-iron stakes; SCEL used film in the NBS holder attached to aluminum stakes. Neither group mentions azimuth or fallout effects -- except for Snapper III -- when the cloud passed over the LASL line. It was assumed that the films were placed upwind of the other shots where fallout had little effect. However, the LASL results are consistently higher than the SCEL results, and possibly the LASL films recorded some fallout radiation. Shot 1 was not instrumented for gamma measurements.

(U) The neutron data for Shots 3, 4, and 8 were taken from measurements made by the Naval Research Lab (NRL) (References 32 and 14). The LASL obtained neutron data at Shots 4, 5, 6, 7, 8, which are recorded in Reference 33. Reference 13 records neutron-flux data for all eight shots during this operation.

(U) The SCEL gamma data for Shots 2 thru 8 are presented in Tables 3.29 thru 3.35 with their appropriate correction factors. Tables 3.36 thru 3.42 give the LASL film data without neutron corrections. Figures 3.22 thru 3.28 present the corrected SCEL gamma-dose-times-slant-range-squared versus slant-range.

3.6 OPERATION IVY

(U) Operation Ivy, held at the PPG during October and November 1952, consisted of two large-yield shots: Mike, a surface shot, and King, an airdrop. Shot information and meteorological data are given in Tables 3.43 and 3.44, respectively.

(U) Gamma measurements were made by LASL on both shots with film (Reference 34). The film types used are the same as specified for Operation Tumbler-Snapper. To obtain initial gamma data in the heavy-fallout field expected from Mike, a film-drop gadget was used whereby films exposed to radiation for a predetermined time would automatically drop below ground level into a radiation-protected area. Unfortunately these gadgets did not work, and many were filled with water, sand, and debris. The few

films that did drop indicated much smaller doses than those films which remained above ground. Although the time of dropping is unknown, the films might reasonably be assumed to have dropped before the arrival of fallout. Only the dropped-film data are presented with error limits which do not include the error due to dropping time. No neutron corrections are presented since the neutron flux was negligible.

(U) The AW film badge was assumed to be bolted to angle-iron stakes for Shot King. All film badges located from 700 to 1700 yards from ground zero were destroyed; the rest were recovered the day after the shot. Survey readings indicated that residual activity was negligible. All gamma stations for both shots were on land.

(U) Reference 13 gives some gold and sulfur data for the two shots. These data were extrapolated to the slant ranges of interest.

(U) The gamma data for both shots as well as the neutron corrections for Shot King, are presented in Tables 3.45 and 3.46. Corrected gamma-dose-times-slant-range-squared versus slant-range for Shot King is given in Figure 3.29.

3.7 OPERATION UPSHOT-KNOTHOLE

(U) Operation Upshot-Knothole was conducted at the NTS from March to June 1953. The operation consisted of 11 detonations highlighted by Shot 10, which was an atomic weapon fired from a cannon. The pertinent shot information and meteorological data are given in Tables 3.47 and 3.48 respectively. It should be noted that in some of the WT reports for this operation, the order of Shots 5 and 6 and Shots 8 and 9 was reversed. Table 3.47 lists the shot numbers strictly according to chronological date of detonation.

~~(U)~~ ~~(S)~~ ~~RD~~ Initial gamma measurements were made by LASL (Reference 35) for Shots 5, 6, 10, and 11 and by SCEL (Reference 36) for Shots 1, 2, 3, 5, 6, 7, 8, 9, and 10. The SCEL gamma detectors consisted of five film types encased in NBS holders and attached to aluminum stakes assumed to be 1/4-inch thick. The film range was from 0 to 12,000 r. The detectors were recovered approximately 3 hours after detonation. No azimuth is given for Shots 1, 3, 6, and 9, and no mention is made of corrections

being necessary for fallout contributions. From comparison of fallout contours for this operation (Reference 24), the initial gamma detectors obviously were placed far enough from ground zero, if they were in either the upwind or cross wind direction, for the fallout effect to be negligible. Large limonite blocks were placed in the towers for Shots 2 and 7 in such a position as to attenuate the radiation east of the tower. The gamma line for Shot 2 was east, and the gamma lines for Shot 7 were east and south. Only the south line data are reported for Shot 7. Neutron corrections were made in Reference 36 for the gamma data obtained for Shot 10. The neutron correction factors used in Reference 36 are erroneous and the neutron fluxes used are suspect. SCEL was one of the groups which reversed the order of Shots 5 and 6, and Shots 8 and 10. SCEL reported distances as radial distance from GZ, not as slant range.

(U) ~~(S-RD)~~ LASL obtained their gamma measurements from five film types in the AW holder attached to angle-iron stakes. The films covered the range from 0.1 to 2000 r. No azimuths are given for Shots 5, 6, and 11, and no mention is made of fallout affecting the detectors. Variation of gamma exposure with height above the ground, from one-half foot to 10 feet, was measured at Shot 10; the variation did not exceed ± 5 percent for the slant distances of 2000 to 3000 yards.

(U) The gamma data obtained by the two projects agreed fairly well for Shots 6 and 10. The LASL data were slightly higher for Shot 5.

(U) ~~(S-RD)~~ Neutron measurements were made by LASL (Reference 37) for Shots 1, 2, 3, 5, 6, 7, and 10, and by NRL (Reference 38) for Shots 8, 9, and 10. The neutron data for Shot 10 were taken from NRL data. Unfortunately, some of the LASL neutron data were taken for diagnostic measurements and were unusable for this report.

Plutonium-neutron data are available for Shots 8, 9, 10 (Reference 39). Since this was the first attempt to measure neutron flux with plutonium detectors and the objective of the project which obtained the plutonium-neutron data was to obtain ratios between neutron flux inside and outside Civil Defense shelters, it was decided not to use these data.

(U) The SCEL gamma data and the neutron corrections, where available are presented in Tables 3.49 thru 3.57. Curves of the SCEL gamma-dose-times-slant-distance-squared versus slant-distance are presented in Figures 3.30 thru 3.38. The LASL gamma data and neutron-flux data are given in Tables 3.58 thru 3.61. The LASL gamma data for Shot 11 times-slant-range-squared versus slant-range are presented in Figure 3.39.

3.8 OPERATION CASTLE

(U) Operation Castle was conducted at the PPG during the period March thru May 1954. The operation consisted of six detonations: two land-surface and four barge shots. Pertinent shot information and meteorological data for the three shots for which gamma data are available are presented in Tables 3.62 and 3.63, respectively.

(U) Initial gamma measurements were attempted by the USA Signal Engineering Laboratories (SEL) for Shots 1, 2, 3, 4, and 6 (Reference 40). Most of the detectors were either destroyed or contaminated so that data from only nine stations from Shots 3, 4, and 6 were usable. Data were obtained from NBS film badges and chemical dosimeters shielded by 0.25-inch aluminum pipes.

(U) Neutron data for Shots 4 and 6 are available from Reference 41. Data from only two neutron stations are reported for Shot 6, and only two of the eight stations for which neutron data are available for Shot 4 had clear line of sight. No neutron data were obtained for Shot 3. In general the neutron results are inadequate because of contamination, excessive time lapses before recovery, and loss of stations.

(U) The gamma data from Shots 3, 4, and 6 are presented in Tables 3.64. No neutron data or corrections are shown. Curves of gamma-dose-times-slant-distance-squared versus slant-distance for Shots 3 and 6 are given in Figures 3.40 and 3.41.

3.9 OPERATION TEAPOT

(U) Operation Teapot was conducted from February thru May 1955 at the NTS. The operation consisted of fourteen detonations: ten tower shots, three airdrops (one of which was a high-altitude detonation), and one underground shot. Table 3.65 provides the pertinent information for the shots for which gamma measurements were made. The meteorological data are given in Table 3.66.

(U) Gamma measurements were made by a number of groups during Operation Teapot; however, only the LASL (Reference 42) and USA Signal Research and Development Laboratory (SRDL) (Reference 43) projects were mainly concerned with free field initial gamma measurements. Gamma data from chemical dosimeters are presented for Shots 9 and 10 (Reference 44) to supplement the SRDL data. These chemical dosimeter values are considered to be less accurate than the film data, since the fast-neutron sensitivity of these dosimeters was unknown. Edgerton, Germeshausen, and Grier, Inc. (EG&G) reported many film gamma measurements for a shielding project

(Reference 45). Results of gamma measurements made by EG&G outside the shields were consistently much lower than the SRDL results at the same slant range. No neutron corrections can be made on the EG&G measurements because a weak film developer was used. These measurements are not reported here.

(U) Los Alamos Project 13.3a (Reference 42) attempted to resolve the discrepancy between the Los Alamos AW film badge and the NBS film-badge results, by comparing them with energy-independent Victoreen thimble chamber readings. The results were discussed in Chapter 2. The NBS and AW badges were exposed on metal stakes to the radiation from Shots 6, 8, 9, 13, and 14. The measurements obtained from Shot 13 were affected by the cloud passing over the instrument line. The NBS film-badge results obtained by LASL are presented to supplement the SRDL gamma data and no distinction is made between the two in the table.

(U) The bulk of the gamma data reported was obtained from the SRDL measurements. The NBS film badges were exposed in aluminum holders attached to metal stakes. It was assumed that the aluminum holders were 1/16-inch thick so that attenuation of the gamma radiation was negligible. The dosimeters were exposed in the upwind direction and recovered as soon as practicable; therefore no residual radiation corrections were necessary. The film badges were exposed in 3/8-inch steel drop canisters for the high-altitude shot. Windows covered with 1/16-inch aluminum were drilled in the canister to expose the film. However, if the radiation did not enter directly through the aluminum window it had to pass through the steel shell as well as the surrounding instrumentation which was not described. Since the orientation of the canisters is not reported, no shield corrections were made for this shot.

(U) SRDL used "betatron correction factors" to account for a difference in calibration curves for the various emulsions when using Co^{60} radiation as opposed to betatron radiation. These factors are ignored in this report, since "betatron correction factors" reported in Appendix C of Reference 45 -- which were obtained by use of the same betatron machine and film emulsions as those used by SRDL -- do not agree with SRDL results. SRDL considered the "betatron correction factors" for previous operations to be negligible except for 508 film emulsion which was not used during Operation Teapot. No experimental confirmation was obtained for the "betatron correction factors", during subsequent operations.

(U) The underground detonation, Shot 7, was instrumented with NBS film badges to obtain residual radiation measurements and is not described in this report. The Shot 11 gamma data out to 1204 yards are a composite of 0°, 45° and 90° lines. The gamma data at 412, 510, and 608 yards for Shot 11 are questionable because the emulsions used at these stations were exposed below or above their normal ranges.

(U) (S-PS) Most of the neutron data are taken from Reference 46 prepared by the NRL. The data are presented in the form of graphs of nvt -times- R^2 versus slant-range and are therefore subject to interpretive errors. The gold-neutron data for Shot 5 show a large upward deviation from the straight-line curve at distances closer than 550 yards. This fact is confirmed by neutron data obtained from Reference 44. The thermal-neutron data used in this report for Shot 5 are the actual measurements and not the straight-line extrapolations. The sulfur-neutron data for Shot 3 seem low when compared to those for Shot 11, the same device with only a few modifications. The Pu, Np, and U data for Shot 11 were obtained at only four distances and no closer than 510 yards. The extrapolation of the neutron curve for Shot 11 may be somewhat in error, especially at distances closer than 510 yards. The fact that the neutron corrections exceeded the total dose on the film at 316 yards also indicates that the extrapolation of the neutron curves to the shorter distances may be in error. The total fast or Pu neutron flux for Shot 3 was estimated using Pu to S ratio for Shot 11.

(U) The gamma data are presented in Tables 3.67 thru 3.79. Curves of gamma-dose-times-slant-range-squared versus slant-range are presented in Figures 3.42 thru 3.54.

3.10 OPERATION REDWING

(U) Operation Redwing was conducted at the PPG from May thru July 1956. The operation consisted of seventeen detonations: two airdrops, five water-surface shots, three limited-land-surface shots, six tower shots, and one shot on a barge in shallow water over a reef. Table 3.80 provides the pertinent information for the shots for which successful gamma measurements were obtained. The meteorological data are given in Table 3.81.

(U) Gamma measurements were made by SEL (Reference 47), LASL (Reference 48), and the US Army Chemical Warfare Laboratories (CWL) (Reference 49). LASL attempted to differentiate the initial-gamma-radiations versus time by using films in "drop gadget" instruments during Shots Dakota, Navajo, and Tewa. Only data from Shot Navajo were usable.

(U) SEL obtained initial gamma data from Shots Zuni, Flathead, Dakota, Navajo, and Tewa. The NBS film badge positioned in a number of different shields was used as the primary dosimeter. Station and mutual dosimeter shielding factors (effects of one detector on another) were calculated by SEL. However, the estimation of the average gamma energy at the distance

of interest was incorrect and new gamma shielding factors were calculated for use in this report. Film normalization factors (betatron correction) were used by SEL. They were the same factors as those used during Operation Teapot, since betatron calibrations could not be made for this Operation. Again, as for the Teapot data, these factors are ignored. Corrections for preshot and postshot residual contamination were obtained by using drop-type mechanisms, field surveys, and estimations.

(U) CWL was mainly interested in neutron measurements, but chemical dosimeters were placed in 0.434-cm thick and 1.5-inch diameter steel pipe nipples to measure gamma as well as neutron dose for Shots Yuma, Erie, Blackfoot, and Kickapoo. The US Air Force (USAF) and the Atomic Energy Commission (AEC) supplied chlorinated hydrocarbon systems to measure gamma dose.

(U) The USAF chloroform dosimeter provided the bulk of the gamma data. The type of chemical used in the AEC chemical dosimeter was not elucidated. Thermal-neutron corrections were made on the USAF chloroform dosimeter using the value of 1.5×10^9 n/cm²/r recommended in Reference 10. The USAF chloroform dosimeter is claimed to be "fast neutron insensitive". However, the interpretation of the term "fast neutron insensitive" is open to question, since no definite sensitivity values have been obtained. No corrections are presented for the AEC chemical dosimeters.

(U) Neutron data for Shots Yuma, Erie, Blackfoot, and Kickapoo are available from Reference 49. No extrapolation of the data was necessary, since the neutron and gamma measurements were made at the same stations. No neutron data are available for Shots Zuni, Flathead, Dakota, Navajo, and Tewa.

(U) The gamma data and neutron corrections (where available) are tabulated in Tables 3.82 thru 3.90. The station and mutual shielding factors are presented for Shots Zuni, Flathead, Dakota, Navajo, and Tewa, but the shield corrections are not presented since neutron corrections must be made first. These results are corrected for residual and preshot exposures. Curves of corrected gamma-dose-times-slant-range-squared versus slant-range are given in Figures 3.55 thru 3.63.

3.11 OPERATION PLUMBBOB

(U) Operation Plumbbob was conducted at the NTS from April thru October 1957. It was the first operation in which a nuclear device was suspended from a balloon for detonation and the first in which rocket delivery of a nuclear warhead from an in-flight aircraft was employed. The operation consisted of thirty detonations: one one-point shot, one tunnel shot, five safety shots, one air shot, nine tower shots, and thirteen balloon shots. A summary of the shot information is presented in Table 3.91, and the meteorological conditions at shot time are given in Table 3.92.

(U) Gamma measurements were made by SRDL (Reference 50), US Air Force School of Aviation Medicine (SAM) (Reference 51), Air Force Special Weapons Center (AFSWC) (Reference 52), EG&G (Reference 53), and a number of different agencies for Program 2 during Shot LaPlace (Reference 54).

(U) ~~(S-RO)~~ AFSWC measured the variation in gamma dose with height above-ground using a variety of detectors and found that the gamma dose increased by about a factor of 1.3 at an altitude of approximately 400 feet. They deduced that the initial gamma radiation is nearly monodirectional and that the bulk of the scattered radiation is of low energy. Selected NBS film badge and chemical dosimeter (SAM) data at 3-foot heights are presented herein to supplement the other gamma data. Hurst and Ritchie (Reference 55), using fission foils and chemical dosimeters in collimators, confirmed that the angular distribution of the neutron and gamma radiation at the ground was insensitive to weapon and distance and that the gamma buildup was approximately 30 percent.

(U) The EG&G film gamma data are presented only for shots where no other gamma data were available. EG&G used a weak film developer, Kodak D-76; the neutron effect on film is impossible to determine when this developer is used (Reference 56). Information was also lacking concerning position and type of stations. The EG&G film badge is very similar to the NBS film badge.

(U) The SAM used the tetrachloroethylene two-phase chemical dosimeter to measure the initial gamma dose. The dosimeter is claimed to be fast-neutron insensitive; that is, if exposed to one rep of fast neutrons with no gamma rays present, the dosimeter would generate 0.83 percent as much acid as it would for 1 r of gamma radiation. Therefore, no corrections are necessary for fast-neutron sensitivity. The dosimeter is thermal-neutron sensitive. Reference 10 reports that 5.9×10^9 thermal neutrons per cm^2 produce as much acid as 1 rep of gamma rays. During this operation lithium shields in 1/4-inch-thick aluminum "Beer Mugs" were used to reduce the thermal-neutron flux. Page 23 of Reference 51 states, "If no gamma rays are present, 3.25×10^{13} thermal neutrons generate as much acid as 17r of gamma rays in the two-phase tetrachloroethylene system." This is erroneous since it conflicts with statements in Reference 10 by the same author and with Reference 57 which states that 3.25×10^{13} thermal neutrons generate as much acid as 17r of gamma rays when the dosimeter is encased in the lithium shields. Corrections for thermal-neutron effects were not made when the dosimeter was encased in lithium. The chemical dosimeters in the "Beer Mugs" were hung from steel goal posts at approximately 3 feet above the ground.

(U) SRDL exposed film in NBS holders to measure gamma dose. Most of the film was exposed in the photographic-dosimeter transport mechanism (Emmett) designed to measure gamma exposure in one-second increments

in the time interval from 0 to 20 seconds. Total dose measurements were obtained inside the Emmett device and from film badges taped to the outside of the Emmett device (1/2 Emmett) and film badges taped to stakes. SRDL did not recommend the use of "betatron correction factors".

(U) Residual radiation values were obtained from Reference 24 for all shots of interest. Most of these residual values were estimates. The residual radiation contribution from each shot for which azimuth and recovery time were reported was determined to be negligible.

(U) The neutron data were obtained by USANDL (Reference 58) and by the Oak Ridge National Laboratory (ORNL) (Reference 55). Reference 55 presents the neutron data in the form of graphs of neutrons per cm^2 -times-slant-range-squared versus slant-range, and are subject to interpretive errors. For those shots for which gold-neutron data are missing, the gold-neutron data were estimated from the ratio of gold to plutonium from similar shots.

(U) Reference 58 presents the neutron data in tabular form as well as graphically, thus allowing more precise determination of flux values. Neutron data for Shot Priscilla at distances between 400 and 600 yards were very erratic and did not follow the parallel-line assumption. The placement of the detectors appeared to be the disturbing factor. These detectors were placed among many structures and other installations, which may have caused scattering and other disturbances in the flux field. These measurements, although an indication of the actual flux at the point of measurement, probably did not give a true picture of the free-field flux. For the free-field flux at these distances, the values taken from an extrapolation of the curve obtained from graphing flux-times-slant-range-squared versus slant-range probably give a more realistic figure.

(U) Neutron fluxes from Shot Smoky were obtained to evaluate the effects of terrain on neutron measurements. Since the terrain effects were pronounced, the neutron data can not be extrapolated to distances other than those at which actual measurements were made.

(U) The gamma data corrected, where possible, for neutron effects are presented in Tables 3.93 thru 3.110. The film data reported are taken from NBS film badge measurements unless stated otherwise. Curves of gamma-dose-times-slant-range-squared versus slant-range are shown in Figures 3.64 thru 3.81.

3.12 OPERATION HARDTACK

(U) Operation Hardtack was a two-phase operation: Phase I was conducted at the PPG from May thru August 1958 and consisted of 35 shots which included the first very-high-altitude detonations; Phase II was

conducted at the NTS from September thru October 1958 and consisted of 37 shots. A summary of the shot information for the six shots for which initial gamma data are available is presented in Table 3.111. The meteorological conditions at shot time are given in Table 3.112.

(U) ~~(S-RE)~~ Gamma measurements for Shots Fig, Hamilton, and Humboldt were provided by CWL (Reference 59). NBS film badges in steel conulets which were screwed onto steel stakes were the principal detectors used. For Shot Fig, the detector stations were placed as follows: thirty-six film-badge stake stations on land; four Emmett devices on land; eight film-badge stations on land and water along the Project 2.4a neutron line; and seven film-badge stations hung vertically from the Project 2.11 balloon cable. The slant ranges reported for the balloon line are not exact since the position of the cable was estimated. Also, this estimated slant range would apply only for the prompt and nitrogen-capture gamma and not for the fission-product radiation since the fireball and cloud rapidly ascend, and this radiation source would pass within the same distance for each detector. It must also be remembered that the air density decreases with altitude and may affect the gamma results. The 143° line was perpendicular to the long axis of the weapon.

(U) ~~(S-RE)~~ The main gamma instrumentation for Shot Hamilton comprised 96 film-badge stakes and 4 Emmett devices. These data were lost because of an accident during film development. The films used for gamma support measurements for Project 4.2 were undamaged (Reference 60). The 150° and 330° lines were perpendicular to the long axis of the weapon.

(U) ~~(S-RE)~~ Shot Humboldt was unexpectedly moved to another area one day prior to shot day; thus only one line could be instrumented. Film badges in pipe nipples were attached to the neutron line out to 400 yards and were pulled out of the area within 10 minutes after detonation. Farther out, film badges were taped to stakes and goal posts of unknown composition and dimensions. This line was perpendicular to the long axis of the weapons.

(U) ~~(S-RE)~~ Residual contamination was generally negligible. The 30-yard station at Shot Hamilton was in the upwind direction and the dose rate was less than 10 r/hr at H+1 hour. The 30-yard station on the 143° line for Shot Fig was recovered within 5-10 minutes. All the water stations were recovered within 10 minutes. The residual contamination data for Shot Fig were obtained from Reference 61. The H+1-hour readings were used to calculate the total residual dose from 10 minutes to the time of recovery (24 hours).

(U) Neutron data were obtained by CWL for Shots Fig, Hamilton, and Humboldt, and reported in Reference 62.

(U) The gamma and neutron data for Shots Lea, Mora, and Socorro were obtained by ORNL and reported in Reference 63. The gamma dosimeters exposed were tetrachloroethylene chemical dosimeters and AgPO_4 glass rods in the ORNL aluminum "Beer Mug" shield including natural lithium shielding. The gamma and neutron data were presented as "normalized" data for Shots X, Y, and Z (Lea, Mora, and Socorro). The appendix to Reference 63 provides the clues necessary to correct the normalized data to actual data for the actual shot. The "scale factors" reported for the neutron data were incorrect. A private communication (Reference 64) from the authors of the report states that the reciprocal of the neutron "scale factors" should be used.

(U) The gamma data are presented in Tables 3.113 thru 3.118. Graphs of gamma-dose-times-slant-range-squared versus slant-range are shown in Figures 3.82 thru 3.87.

3.13 OPERATION SUN BEAM

(U) Operation Sun Beam was conducted at NTS in July 1962. The operation consisted of four shots of small-yield weapons close to the ground. A summary of the shot information is given in Table 3.119, and the meteorological conditions at shot time are presented in Table 3.120.

(U) The USANDL measured the initial gamma dose for the four shots (Reference 11). The detectors used were film in NBS holders, glass micro-dosimeters in tin-tantalum-teflon holders, cobalt-glass plates, calcium fluoride thermoluminescent dosimeters, and formic-acid chemical dosimeters. The formic-acid dosimeters yielded no usable data and the thermoluminescent dosimeters were generally lower by a factor of three as compared to the other three dosimeter systems. Only a few thermoluminescent dosimeters were exposed, and the results are not presented in this compilation. The dosimeters were exposed mainly in steel pipe nipples which were attached to pull-out recovery lines. No residual radiation corrections are necessary in view of the early recovery of all dosimeters. Protection from thermal neutrons was, in many cases, provided by a shield of lithium-6. The cobalt plates which were not protected by Li^6 yielded data which are suspect since the thermal-neutron correction is very large and not accurately known.

The 649 film data, especially at the closer stations, gave anomalous results after corrections. At some stations the fast-neutron correction was greater than the uncorrected gamma dose. This may be due to an error in the fast-neutron correction factor, but more likely it is due to dose-rate dependence. The 649 film provided much better data at more distant stations where the dose rate was lower, although the neutron-correction factors were the same. Some dosimeters were exposed in nylon pipes with nylon screw-type plugs. The thermal-neutron flux inside these nylon shields was generally higher than the thermal-neutron flux outside the shield by a factor of 2.2. This is taken into account in correcting the data obtained in nylon shields.

(U) The neutron data were obtained by USANDL and reported in Reference 65. Neutron and gamma data were obtained at the same stations. Some of the neutron data points are far removed from the smooth curve of the RD^2 versus D plots. The make-up of the stations may have caused this deviation. The neutron data used are the actual data obtained at each station.

(U) The gamma data are presented in Tables 3.121 thru 3.124. Graphs of gamma-dose-times-slant-range-squared versus slant-range are shown in Figures 3.88 thru 3.93.

3.14 OPERATION FISH BOWL

(U) Operation Fish Bowl was conducted at the Johnson Island Test Area during the summer and fall of 1962. The operation consisted of ten high-altitude detonations, five of which achieved a nuclear yield. Pertinent shot information is presented in Table 3.125.

(U) Gamma measurements were made by USANDL (Reference 64). The main detectors were film in NBS holders, silver-phosphate-glass microdosimeters, and cobalt plates. The gamma instrumentation was contained in three recoverable pods for each shot. The pods were attached to the launch vehicle and released at the proper time during the early part of the trajectory to place them at various distances from the detonation point. The three gamma instrument packages per pod were placed at the center of the pod and were surrounded by various objects and cushioning. Some of the cobalt plates were placed in the neutron-detector packages which were placed at the rear bulkhead and presumably were so oriented that they looked directly at the burst. The cobalt plates in the neutron package recorded less dose than that recorded by the cobalt plates in the gamma package. The greater

shielding around the gamma package would indicate that the reverse should be true. However, much of the shielding was a high-hydrogen-content cushioning. This material may have thermalized some of the fast neutrons and provided a higher thermal-neutron flux at the gamma package than at the neutron package. Since the cobalt plates are highly thermal-neutron-sensitive, this thermalization effect may have been the cause of the discrepancy in the readings.

(U) Neutron measurements were made by the USANDL (Reference 65). No thermal-neutron-flux values are given because of the doubtfulness of the validity of the small differences between the cadmium-shielded and the unshielded gold detectors.


(U) Since the thermal-neutron-flux values are not available, and the effects of the difference in the positioning of the neutron and gamma packages in the pods and the effects of the shielding material are not known, the gamma results have not been corrected for neutron and shielding effects. The uncorrected gamma results are presented in Tables 3.126, 3.127, and 3.128 and the curves of gamma-dose-times-slant-range-squared versus slant-range are shown in Figures 3.94, 3.95 and 3.96.

(S-20) TABLE 3.1 SHOT INFORMATION - OPERATION SANDSTONE

Shot Designation	Date and Time Fired	Location and Type	Height of Burst ft	Yield	
				ft	kt
X-ray	14 April 1948 1816:59 GMT	Janet-Tower	200		36
Yoke	30 April 1948 1808:59 GMT	Sally-Tower	200		49
Zebra	14 May 1948 1804:60 GMT	Yvonne-Tower	200		18

(U) TABLE 3.2 METEOROLOGICAL DATA - OPERATION SANDSTONE

Shot	Pressure mb	Temperature °K	Density Pressure g/cm ³ x10 ³	p/p _s	(p _s /p) ²
X-ray	1112.3 1199	297	1.40	1.09	0.85
Yoke	1007.3 1050	299	1.23	0.95	1.11
Zebra	1007.9 940	300	0.95	0.73	1.88

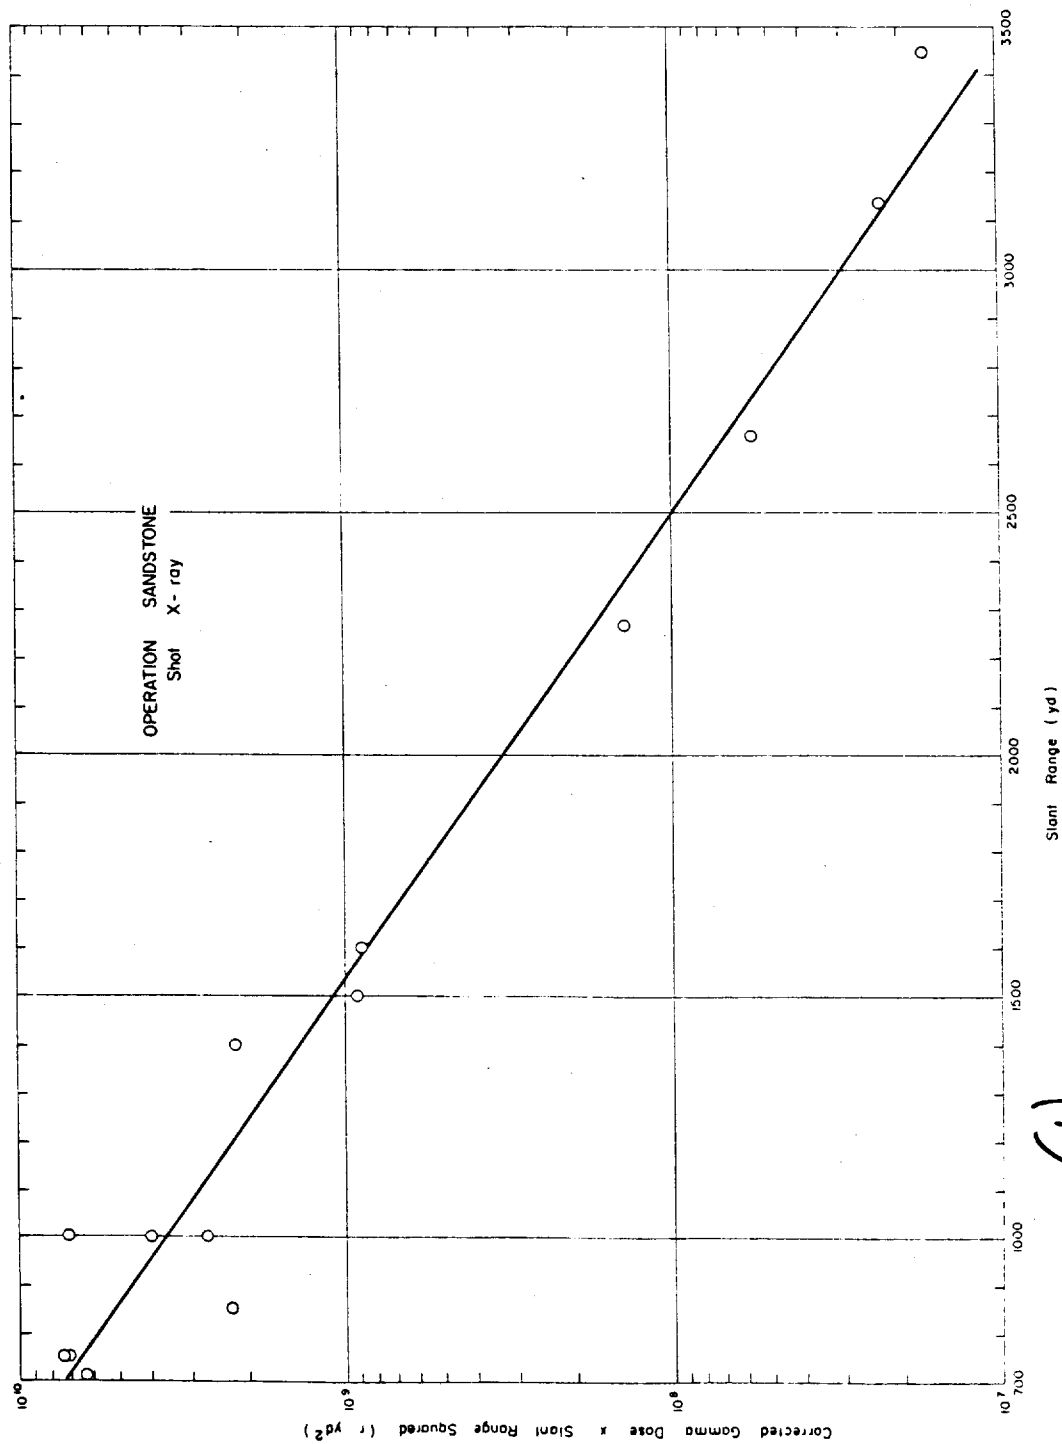

(u)

Figure 3.1.1 (u) Operation Sandstone - Shot X-ray - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).


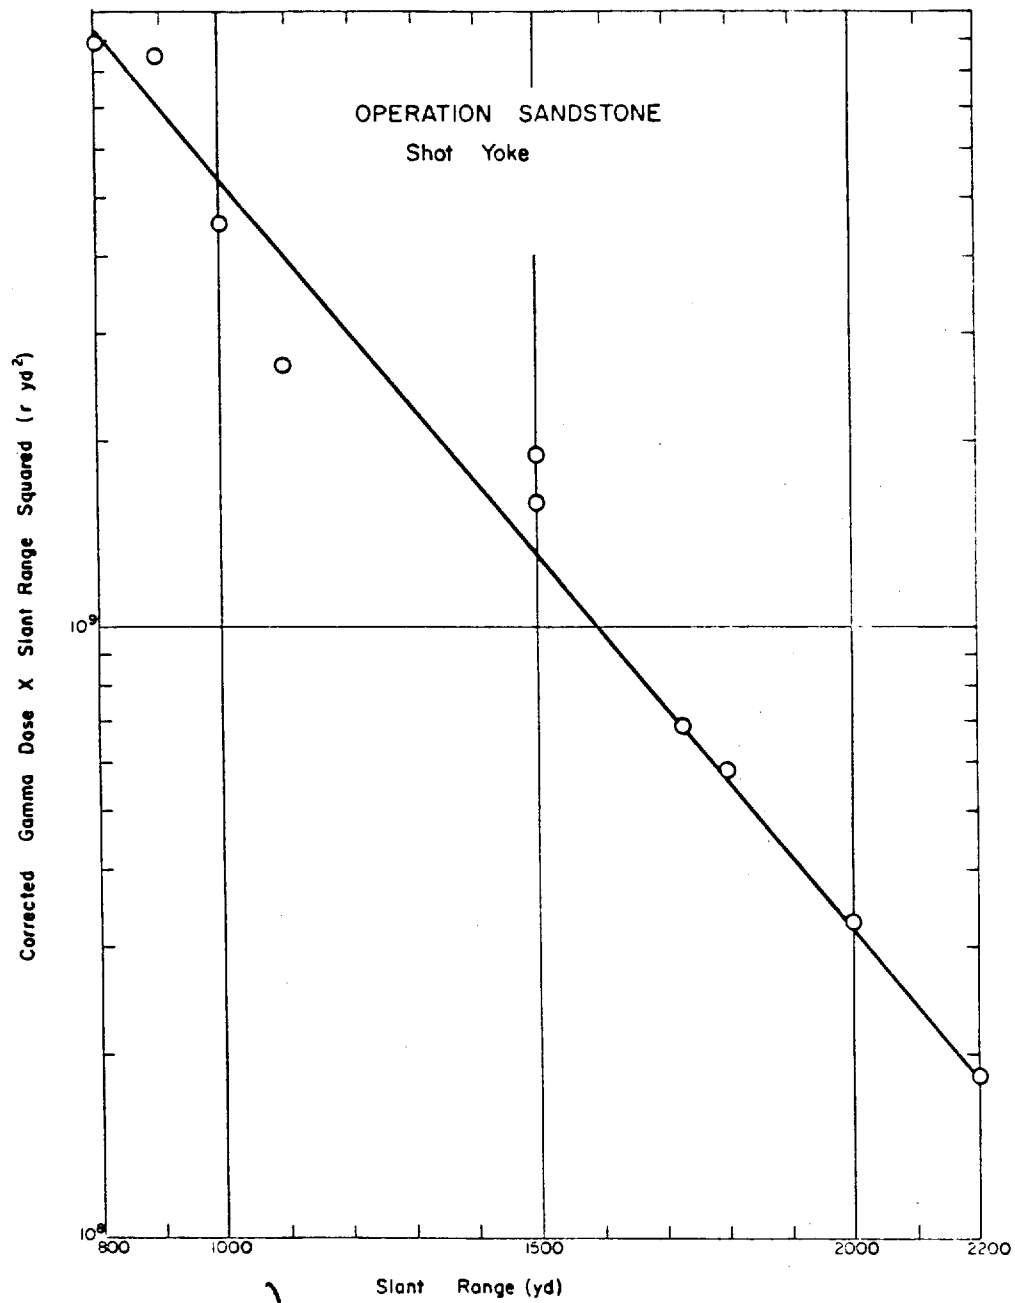


Figure 3.2 (U) ~~(S-RD)~~ Operation Sandstone - Shot Yoke - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

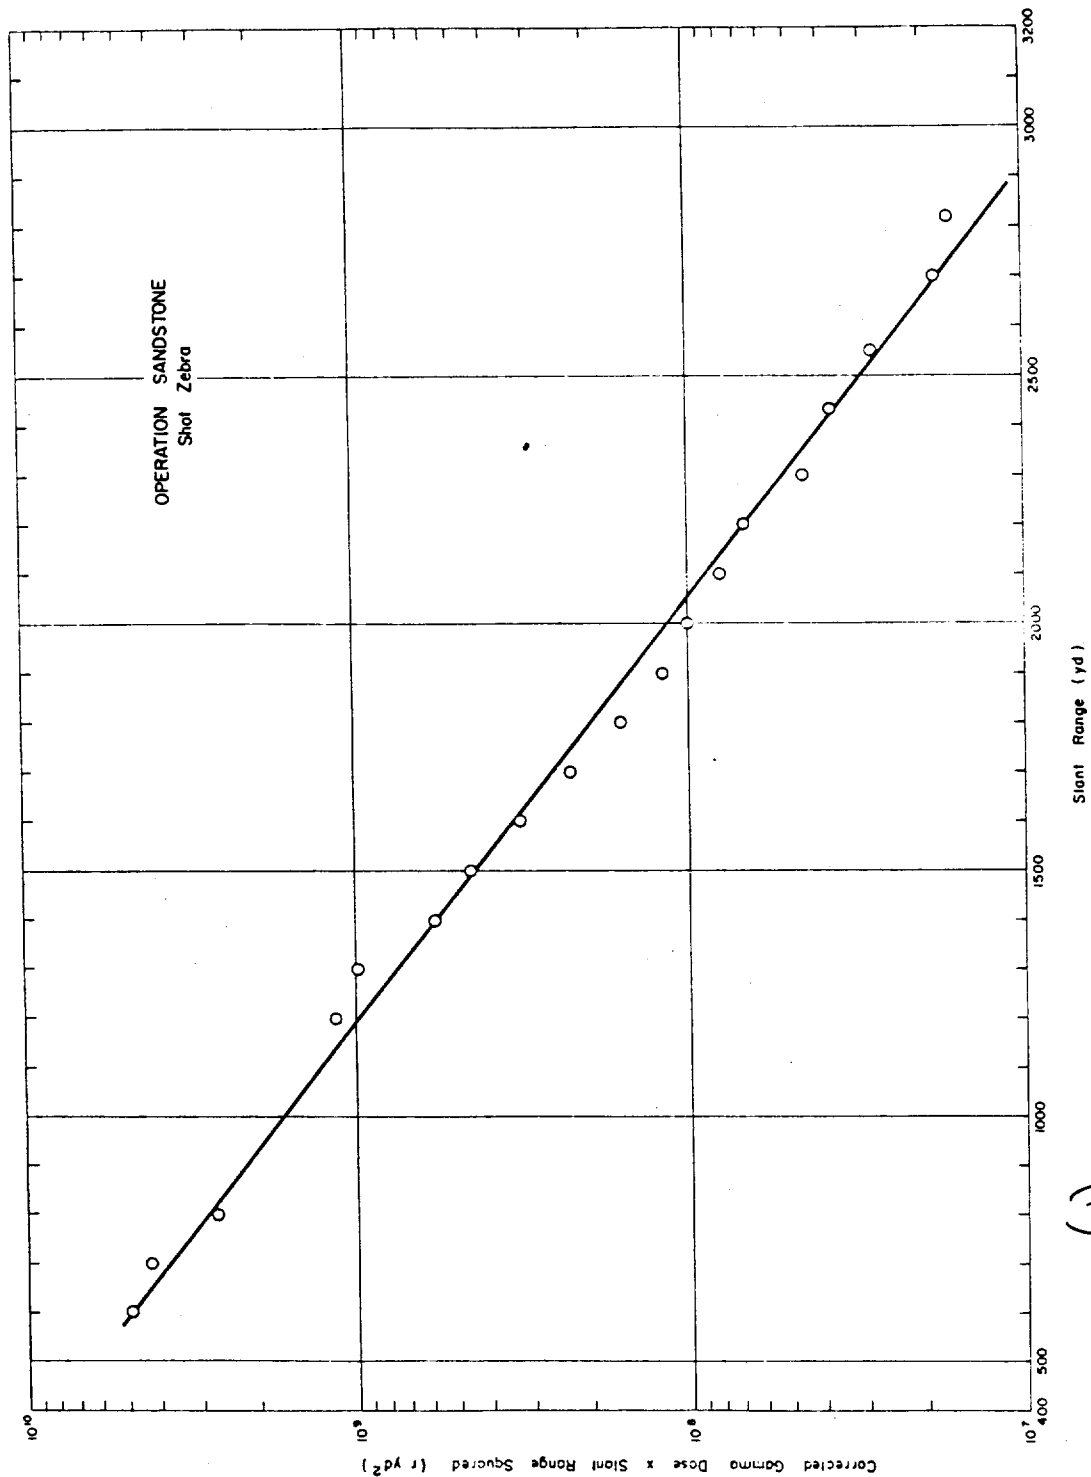

(U) Figure 3.3 (SND) Operation Sandstone - Shot Zebra - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(U) (S-AD) TABLE 3.6 SHOT INFORMATION - OPERATION RANGER

Shot Designation	Date and Time Fired	Location and Type	Height of Burst ft	Yield	
				Total kt	Fission kt
Able	27 Jan 1951 1344:51 GMT	FF ^a -Air	1060	1.3	1.3
Baker I	28 Jan 1951 1352:05 GMT	FF ^a -Air	1080	7.4	7.4
Easy	1 Feb 1951 1346:39 GMT	FF ^a -Air	1080	1.	1.
Baker II	2 Feb 1951 1348:48 GMT	FF ^a -Air	1100	7.7	7.7
Fox	6 Feb 1951 1346:55 GMT	FF ^a -Air	1435	22	22

^aFrenchman's Flat

(U) TABLE 3.7 METEOROLOGICAL DATA - OPERATION RANGER

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	ρ/ρ_s	$(\rho_s/\rho)^2$
Able	903	271	1.14	0.88	1.29
Baker I	899	270.2	1.14	0.88	1.29
Easy	919	261.5	1.21	0.93	1.16
Baker II	883	263.8	1.14	0.88	1.29
Fox	909	271	1.14	0.88	1.29

TABLE 4.2 INITIAL DATA HERE DATA - ORIENTATION MAPPER, SHOT TABLE

Shot Range	Azimuth	Film Type	Theor- ical Count Dose	Backscat. Flux		Shield Type
				At	n/cm ²	
30	c	Adlux	<3,000	7.47x10 ⁻¹	1	e
40	c	Adlux	<3,000	4.90x10 ⁻¹	1	e
50	c	Adlux	1,710	1.00x10 ⁻¹	1	e
60	c	Adlux	870	6.97x10 ⁻²	1	e
70	c	Adlux	595	2.78x10 ⁻²	1	e
80	c	Adlux	410	1.40x10 ⁻²	1	e
90	c	Adlux	270	7.48x10 ⁻³	1	e
100	c	Adlux	162	4.87x10 ⁻³	1	e
110	c	Adlux	120	2.03x10 ⁻³	1	e
120	c	Adlux	70	1.03x10 ⁻³	1	e
130	c	Adlux	39	4.73x10 ⁻⁴	1	e
140	c	Adlux	23	2.43x10 ⁻⁴	1	e
150	c	Adlux	16	1.22x10 ⁻⁴	1	e
160	c	Adlux	11	6.97x10 ⁻⁵	1	e
170	c	Adlux	4.0	3.30x10 ⁻⁵	1	e
180	c	Adlux	2.3	1.74x10 ⁻⁵	1	e
190	c	Adlux	1.4	8.20x10 ⁻⁶	1	e
200	c	Adlux	1.1	3.97x10 ⁻⁶	1	e
210	c	Adlux	0.76	1.91x10 ⁻⁶	1	e
220	c	Adlux	0.54	9.38x10 ⁻⁷	1	e
230	c	Adlux	0.40	4.39x10 ⁻⁷	1	e
240	c	Adlux	0.29	2.12x10 ⁻⁷	1	e
250	c	Adlux	0.23	1.09x10 ⁻⁷	1	e
260	c	Adlux	0.17	4.91x10 ⁻⁸	1	e
270	c	Adlux	0.11	2.39x10 ⁻⁸	1	e
280	c	Adlux	0.09	<1x10 ⁻⁸	1	e
290	c	Adlux	0.09	<1x10 ⁻⁸	1	e
300	c	Adlux	0.09	<1x10 ⁻⁸	1	e

a. Ineffective, backscattered dose

due to film exposure, dose not related to application plot.

TABLE 4.3 INITIAL DATA HERE DATA - ORIENTATION MAPPER, SHOT TABLE

Shot Range	Azimuth	Film Type	Theor- ical Count Dose	Backscat. Flux		Shield Type
				At	n/cm ²	
30	c	Adlux	24,000	7.77x10 ⁻²	1	e
40	c	Adlux	1,410	4.00x10 ⁻²	1	e
50	c	Adlux	1,005	1.00x10 ⁻²	1	e
60	c	Adlux	450	4.00x10 ⁻³	1	e
70	c	Adlux	255	1.00x10 ⁻³	1	e
80	c	Adlux	160	6.77x10 ⁻⁴	1	e
90	c	Adlux	110	3.77x10 ⁻⁴	1	e
100	c	Adlux	71	1.74x10 ⁻⁴	1	e
110	c	Adlux	51	7.97x10 ⁻⁵	1	e
120	c	Adlux	31	4.40x10 ⁻⁵	1	e
130	c	Adlux	21	2.11x10 ⁻⁵	1	e
140	c	Adlux	14	1.07x10 ⁻⁵	1	e
150	c	Adlux	13	5.17x10 ⁻⁶	1	e
160	c	Adlux	7.7	2.97x10 ⁻⁶	1	e
170	c	Adlux	6.4	1.35x10 ⁻⁶	1	e
180	c	Adlux	4.4	6.77x10 ⁻⁷	1	e
190	c	Adlux	3.4	3.77x10 ⁻⁷	1	e
200	c	Adlux	2.4	1.69x10 ⁻⁷	1	e
210	c	Adlux	1.4	8.30x10 ⁻⁸	1	e
220	c	Adlux	1.4	4.11x10 ⁻⁸	1	e
230	c	Adlux	1.4	2.09x10 ⁻⁸	1	e
240	c	Adlux	1.4	1.02x10 ⁻⁸	1	e
250	c	Adlux	1.4	<1x10 ⁻⁸	1	e
260	c	Adlux	1.4	<1x10 ⁻⁸	1	e
270	c	Adlux	1.4	<1x10 ⁻⁸	1	e
280	c	Adlux	1.4	<1x10 ⁻⁸	1	e
290	c	Adlux	1.4	<1x10 ⁻⁸	1	e
300	c	Adlux	1.4	<1x10 ⁻⁸	1	e

a. Ineffective, backscattered dose

due to film exposure, dose not related to application plot.

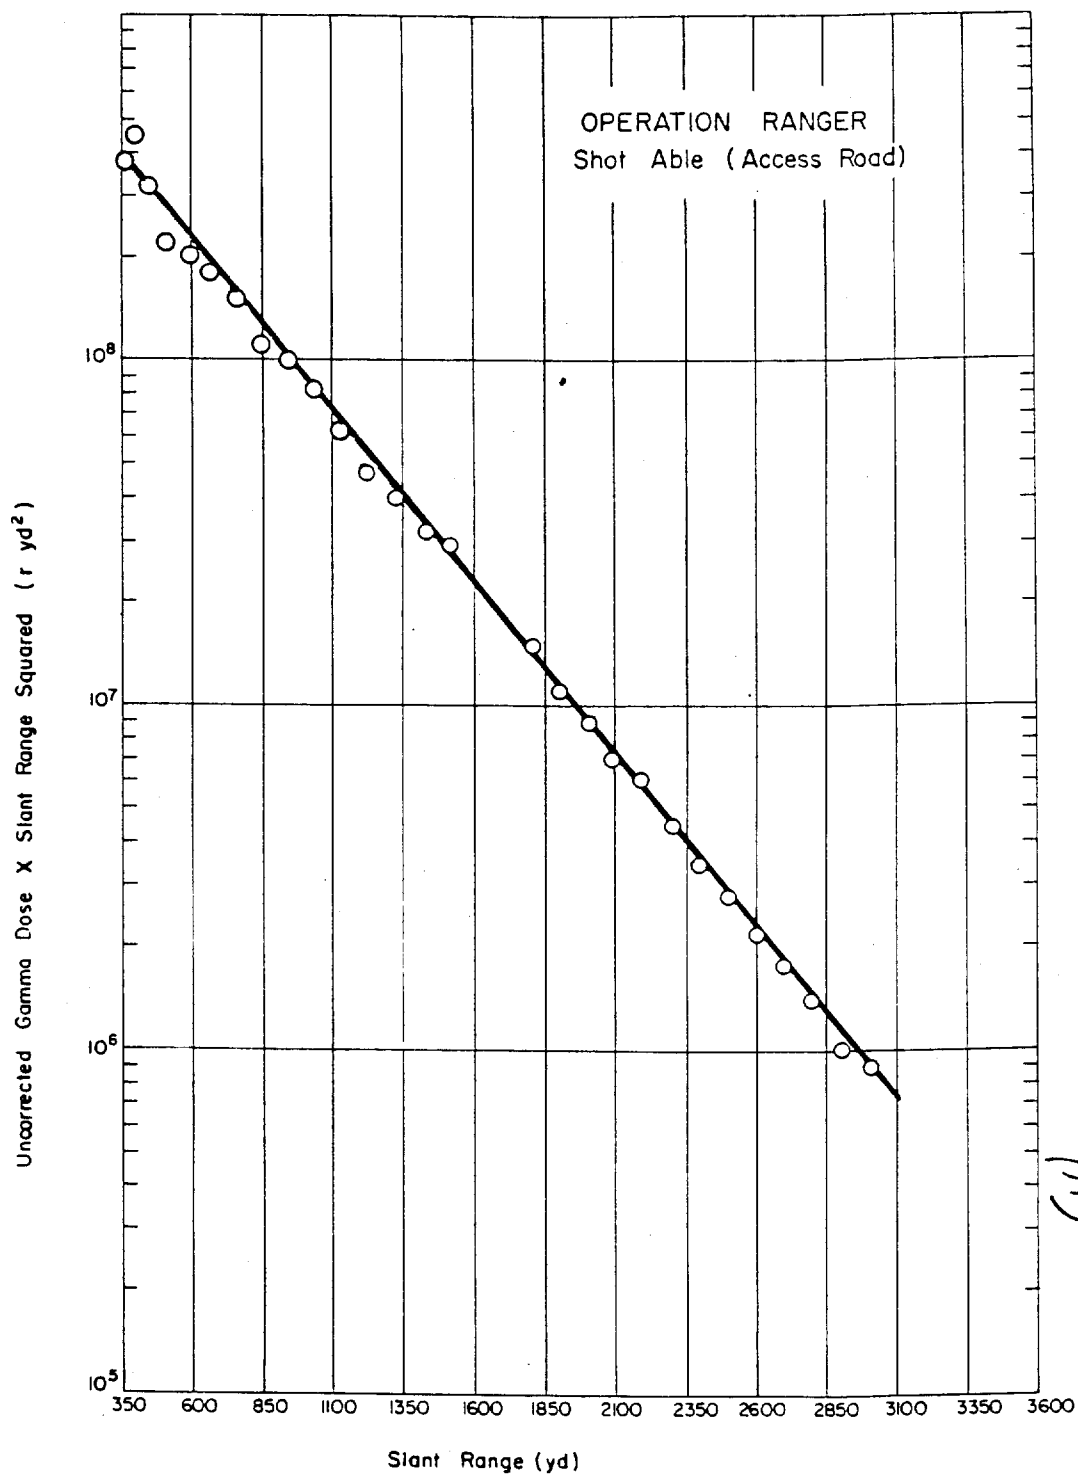


Figure 3.4 - ^(U)Operation Ranger - Shot Able (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).


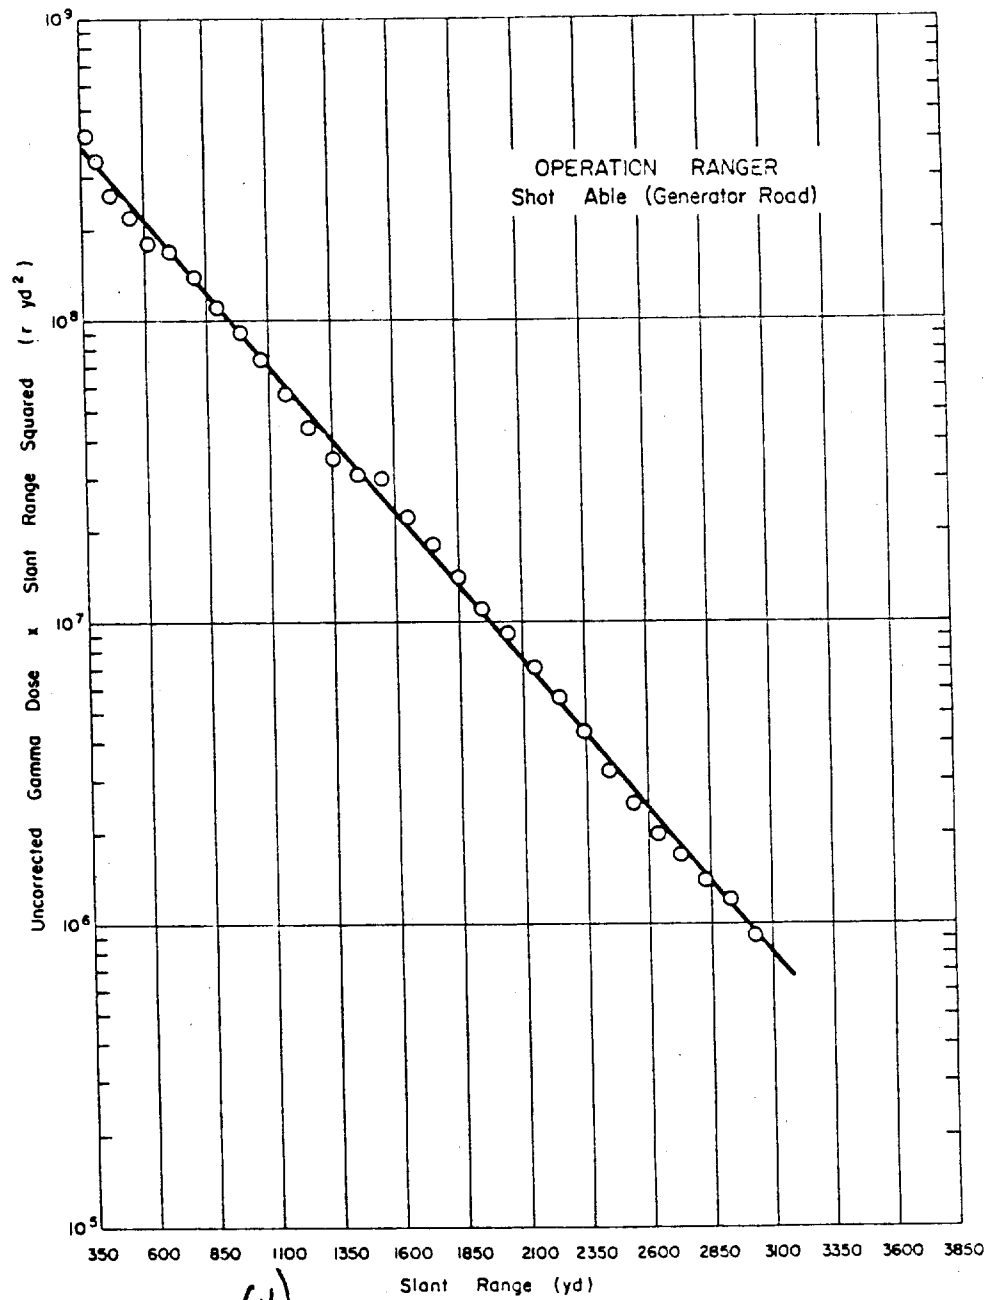


Figure 3.5 (U) Operation Ranger - Shot Able (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

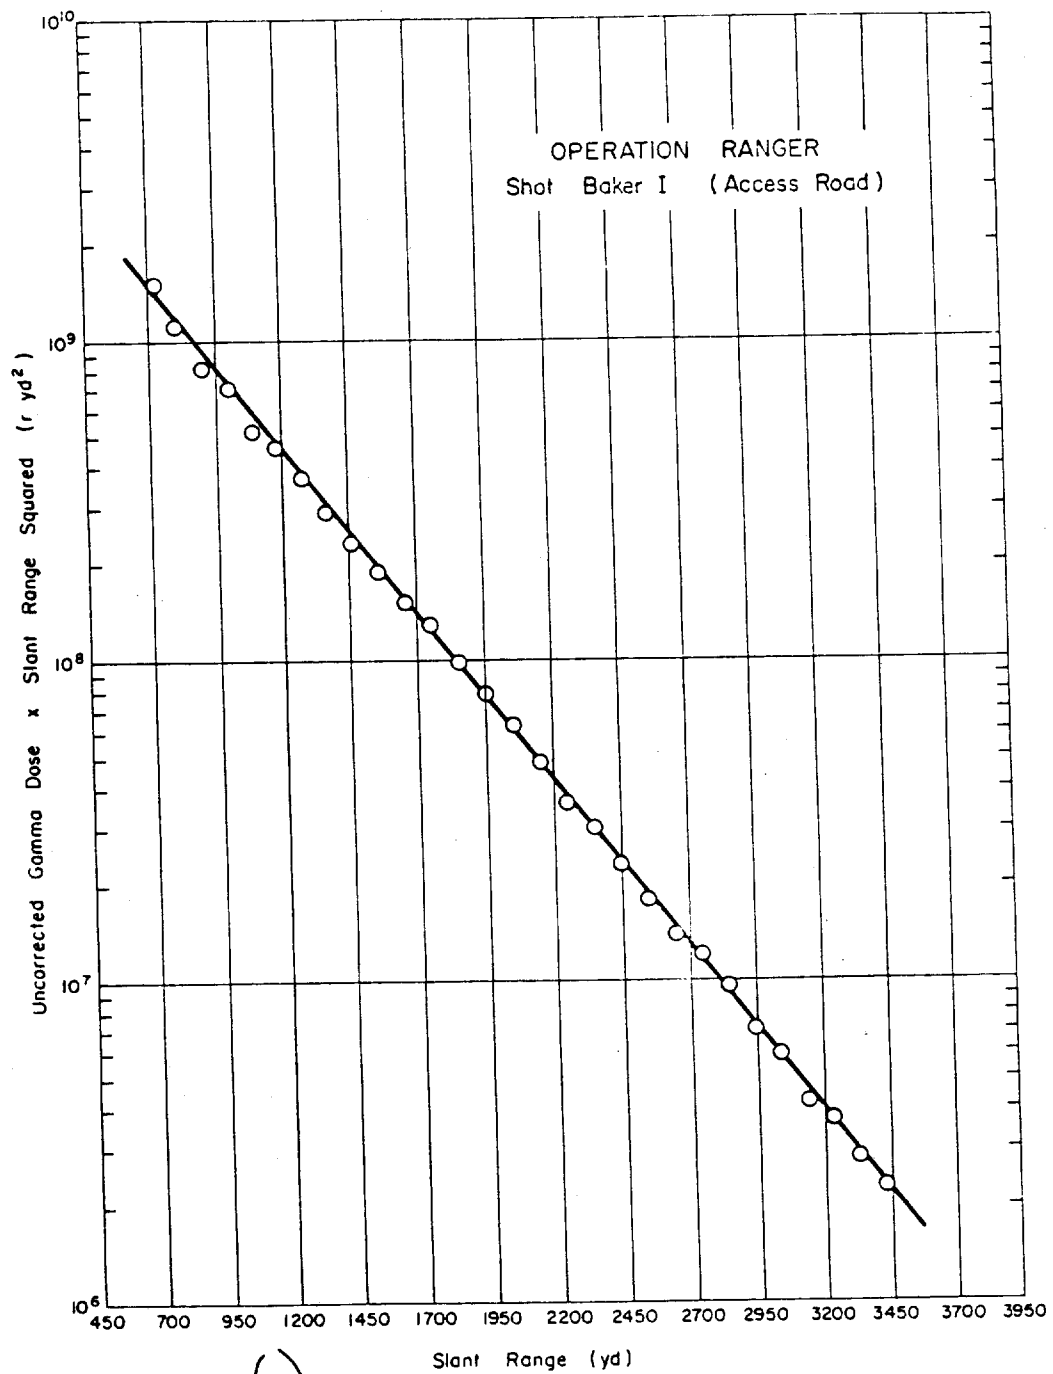

(U)
Figure 3.6 (S-PD) Operation Ranger - Shot Baker I (Access Road) -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

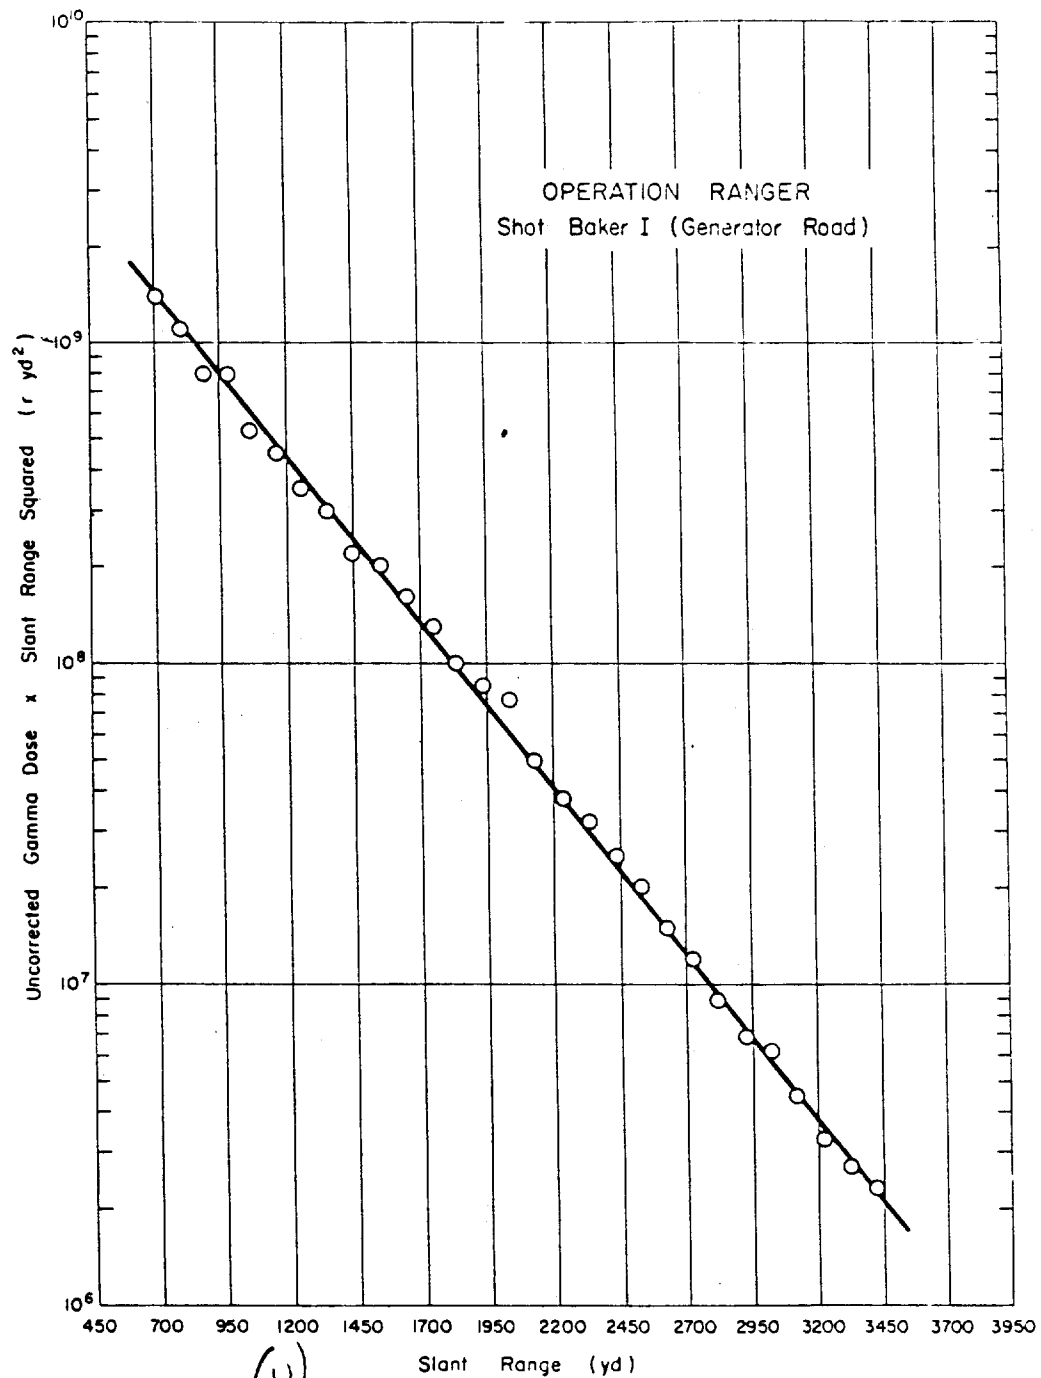


Figure 3.7 (S-~~RD~~)^(U) Operation Ranger - Shot Baker I (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range(U).

~~(SECRET)~~ **TABLE 3.10 INITIAL GAMMA TECH. DATA - OPERATION KATHOLIC, SHOT EASY**

Slant Range	Azimuth	Film Type	Unex- posed Gauss Base	Neutron Flux		Shield Type
				Au	S	
yd			τ	n/cm^2	n/cm^2	
300	c	Adulex	1,670	4.5×10^{11}	d	d
420	b	Adulex	1,175	1.7×10^{11}	d	d
470	c	Adulex	775	7.1×10^{10}	d	e
540	c	Adulex	625	2.4×10^{10}	f	e
620	c	Adulex	400	1.5×10^{10}	f	e
700	c	Adulex	290	5.5×10^9	d	e
730	c	Adulex	165	3.7×10^9	d	e
860	c	Adulex	125	4.1×10^9	d	e
970	c	Adulex	87	7.4×10^8	d	e
1,070	c	Adulex	52	5.7×10^8	d	e
1,160	c	Adulex	35	1.1×10^8	d	e
1,260	c	Adulex	20	9.7×10^7	d	e
1,350	c	Adulex	15	4.6×10^7	d	e
1,450	c	Adulex	11.0	4.2×10^7	d	e
1,550	c	Adulex	6.5	1.6×10^7	d	e
1,640	c	Adulex	4.5	5.6×10^6	d	e
1,740	c	Adulex	3.5	2.7×10^6	d	e
1,860	c	Adulex	1.9	1.3×10^6	d	e
1,940	c	Adulex	1.6	6.1×10^5	d	e
2,030	c	Adulex	1.17	3.5×10^5	d	e
2,130	c	Adulex	0.86	1.6×10^5	d	e
2,230	c	Adulex	0.56	7.6×10^4	d	e
2,330	c	Adulex	0.45	3.7×10^4	d	e
2,430	c	Adulex	0.24	8.3×10^3	d	e
2,530	c	Adulex	0.17	4.1×10^3	d	e
2,630	c	Adulex	0.13	3.0×10^3	d	e
300	c	Adulex	1,740	3.4×10^{11}	d	e
400	c	Adulex	1,200	1.2×10^{11}	d	e
500	f	Adulex	905	4.7×10^{10}	d	e
590	f	Adulex	565	1.7×10^{10}	d	e
660	f	Adulex	440	7.8×10^9	d	e
760	f	Adulex	205	5.5×10^9	d	e
840	f	Adulex	160	1.9×10^9	d	e
940	f	Adulex	96	1.0×10^9	d	e
1,050	f	Adulex	63	5.1×10^8	d	e
1,160	f	Adulex	39	2.6×10^8	d	e
1,260	f	Adulex	26	1.8×10^8	d	e
1,360	f	Adulex	16	6.7×10^7	d	e
1,460	f	Adulex	10.9	4.3×10^7	d	e
1,560	f	Adulex	6.5	1.9×10^7	d	e
1,660	f	Adulex	5.1	7.5×10^6	d	e
1,760	f	Adulex	4.1	5.6×10^6	d	e
1,860	f	Adulex	2.7	1.7×10^6	d	e
1,960	f	Adulex	2.1	8.5×10^5	d	e
2,060	f	Adulex	1.0	1.7×10^5	d	e
2,160	f	Adulex	0.7	9.4×10^4	d	e
2,260	f	Adulex	0.53	4.5×10^4	d	e
2,360	f	Adulex	0.37	2.2×10^4	d	e
2,460	f	Adulex	0.23	1.0×10^4	d	e
2,560	f	Adulex	0.14	5.3×10^3	d	e
2,660	f	Adulex	0.15	2.5×10^3	d	e

Inclusive,

Relative

$$T_{\text{eff}} = T_0 + \frac{1}{2} \frac{v^2}{c^2} T_0$$

TABLE 1.11 INITIAL GAMMA DOSE DATA - OPERATION RIDGER, SHOT
BATCH 11

Slant Range	Azimuth	Film Type	Uncor- rected counts	Neutron Flux		Shield Type
				Au	S	
yd			F	n/cm ²	n/cm ²	
740	c	Adlux	1.975	6.28x10 ¹⁰	d	e
820	c	Adlux	1.160	3.19x10 ¹⁰	d	e
910	c	Adlux	860	1.51x10 ¹⁰	d	e
1,000	c	Adlux	495	8.59x10 ⁹	d	e
1,100	c	Adlux	330	4.21x10 ⁹	d	e
1,190	c	Adlux	245	2.23x10 ⁹	d	e
1,280	c	Adlux	155	1.13x10 ⁹	d	e
1,380	c	Adlux	105	5.77x10 ⁸	d	e
1,480	c	Adlux	53	2.79x10 ⁸	d	e
1,570	c	Adlux	23	1.43x10 ⁸	d	e
1,670	c	55 ⁺ Adlux	35	6.95x10 ⁷	d	e
1,770	c	55 ⁺ Adlux	24	3.48x10 ⁷	d	e
1,860	c	55 ⁺ Adlux	14	1.69x10 ⁷	d	e
1,960	c	55 ⁺ Adlux	13.4	1.52x10 ⁷	d	e
2,060	c	55 ⁺ Adlux	13.4	1.52x10 ⁷	d	e
2,160	c	55 ⁺ Adlux	6.2	6.52x10 ⁶	d	e
2,260	c	55 ⁺ Adlux	4.4	1.03x10 ⁶	d	e
2,350	c	55 ⁺ Adlux	4.4	1.03x10 ⁶	d	e
2,450	c	55 ⁺ Adlux	3.3	5.41x10 ⁵	d	e
2,550	c	55 ⁺ Adlux	2.4	2.66x10 ⁵	d	e
2,650	c	55 ⁺ Adlux	1.64	1.57x10 ⁵	d	e
2,750	c	55 ⁺ Adlux	1.34	8.61x10 ⁴	d	e
2,850	c	55 ⁺ Adlux	0.93	3.10x10 ⁴	d	e
2,950	c	55 ⁺ Adlux	0.66	1.56x10 ⁴	d	e
3,050	c	55 ⁺ Adlux	0.46	7.71x10 ³	d	e
3,150	c	55 ⁺ Adlux	0.33	4.1x10 ³	d	e
3,250	c	55 ⁺ Adlux	0.23	2.18x10 ³	d	e
3,350	c	55 ⁺ Adlux	0.19	1.31x10 ³	d	e
760	f	Adlux	1.680	5.09x10 ¹⁰	d	e
850	f	Adlux	1.060	2.54x10 ¹⁰	d	e
940	f	Adlux	715	1.33x10 ¹⁰	d	e
1,030	f	Adlux	445	6.84x10 ⁹	d	e
1,140	f	Adlux	345	3.48x10 ⁹	d	e
1,220	f	Adlux	229	1.76x10 ⁹	d	e
1,300	f	Adlux	155	8.59x10 ⁸	d	e
1,400	f	Adlux	100	4.49x10 ⁸	d	e
1,500	f	Adlux	64	2.33x10 ⁸	d	e
1,610	f	Adlux	54	1.07x10 ⁸	d	e
1,700	f	55 ⁺ Adlux	21	5.77x10 ⁷	d	e
1,800	f	55 ⁺ Adlux	13.3	2.79x10 ⁷	d	e
1,900	f	55 ⁺ Adlux	10.4	1.31x10 ⁷	d	e
2,000	f	55 ⁺ Adlux	7.7	6.64x10 ⁶	d	e
2,100	f	55 ⁺ Adlux	5.2	3.48x10 ⁶	d	e
2,200	f	55 ⁺ Adlux	3.3	1.57x10 ⁶	d	e
2,300	f	55 ⁺ Adlux	2.4	7.71x10 ⁵	d	e
2,400	f	55 ⁺ Adlux	1.6	4.09x10 ⁵	d	e
2,500	f	55 ⁺ Adlux	1.1	2.18x10 ⁵	d	e
2,600	f	55 ⁺ Adlux	0.73	1.07x10 ⁵	d	e
2,700	f	55 ⁺ Adlux	0.46	5.41x10 ⁴	d	e
2,800	f	55 ⁺ Adlux	0.33	2.79x10 ⁴	d	e
2,900	f	55 ⁺ Adlux	0.23	1.31x10 ⁴	d	e
3,000	f	55 ⁺ Adlux	0.19	6.64x10 ³	d	e
3,100	f	55 ⁺ Adlux	0.15	3.48x10 ³	d	e
3,200	f	55 ⁺ Adlux	0.11	1.88x10 ³	d	e

Year	Percentage of Respondents (%)
1997	65
1998	75
1999	70
2000	85
2001	90
2002	95
2003	100
2004	100

[illegible]

1997

THE UNIVERSITY OF CHICAGO

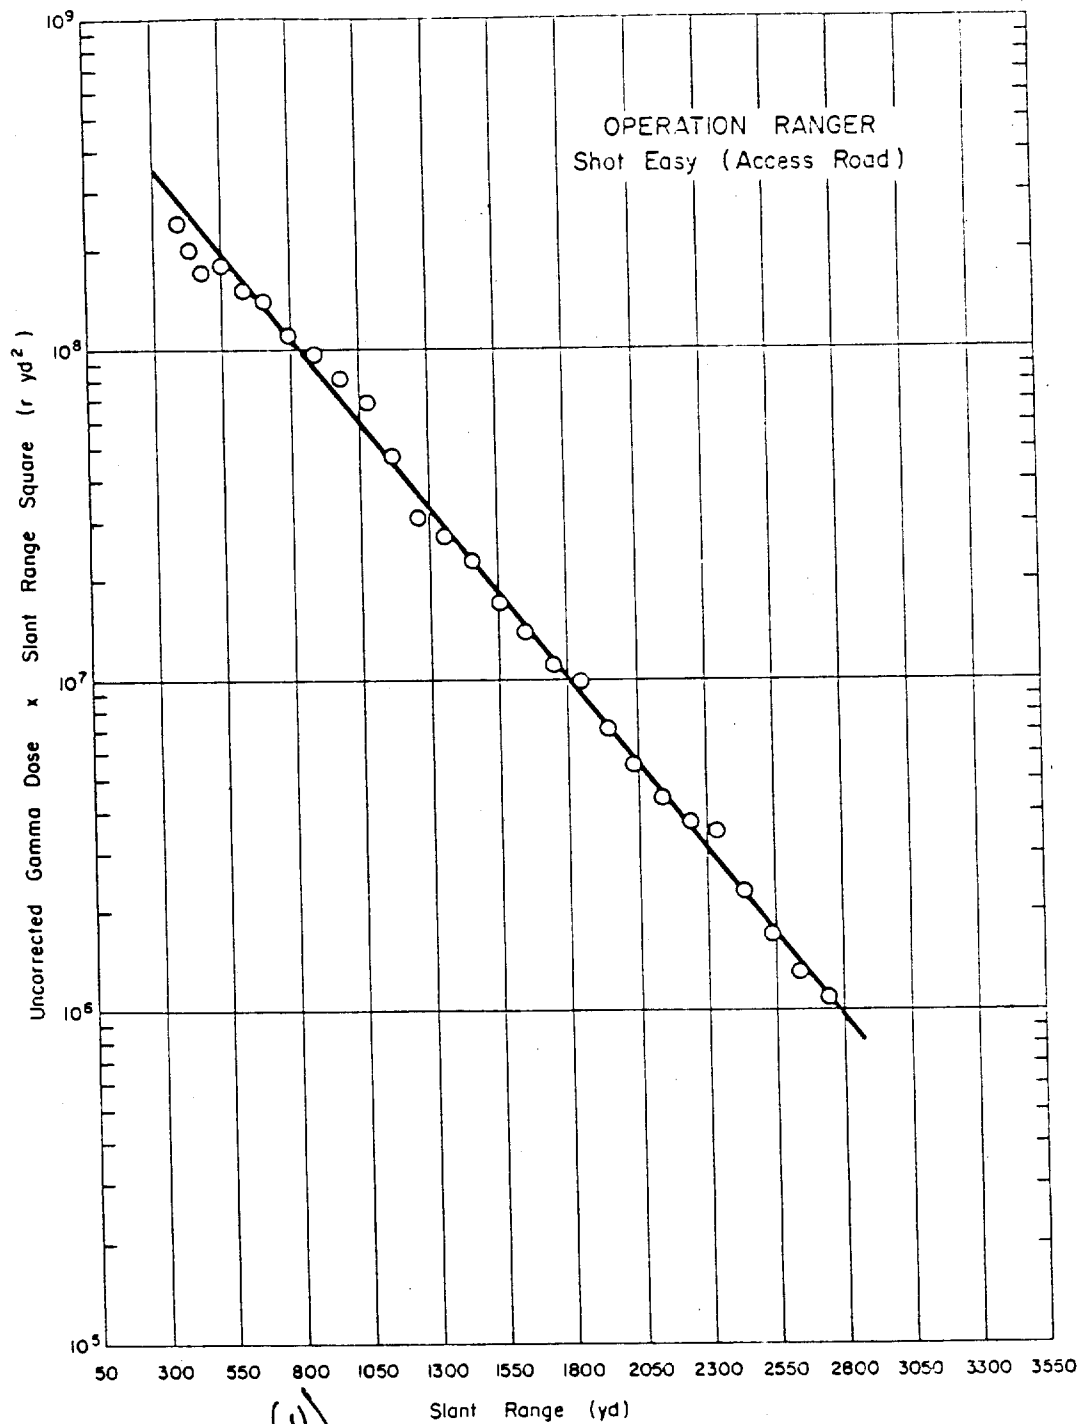


Figure 3.8 (S-RD) Operation Ranger - Shot Easy (Access Road) -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range(U).

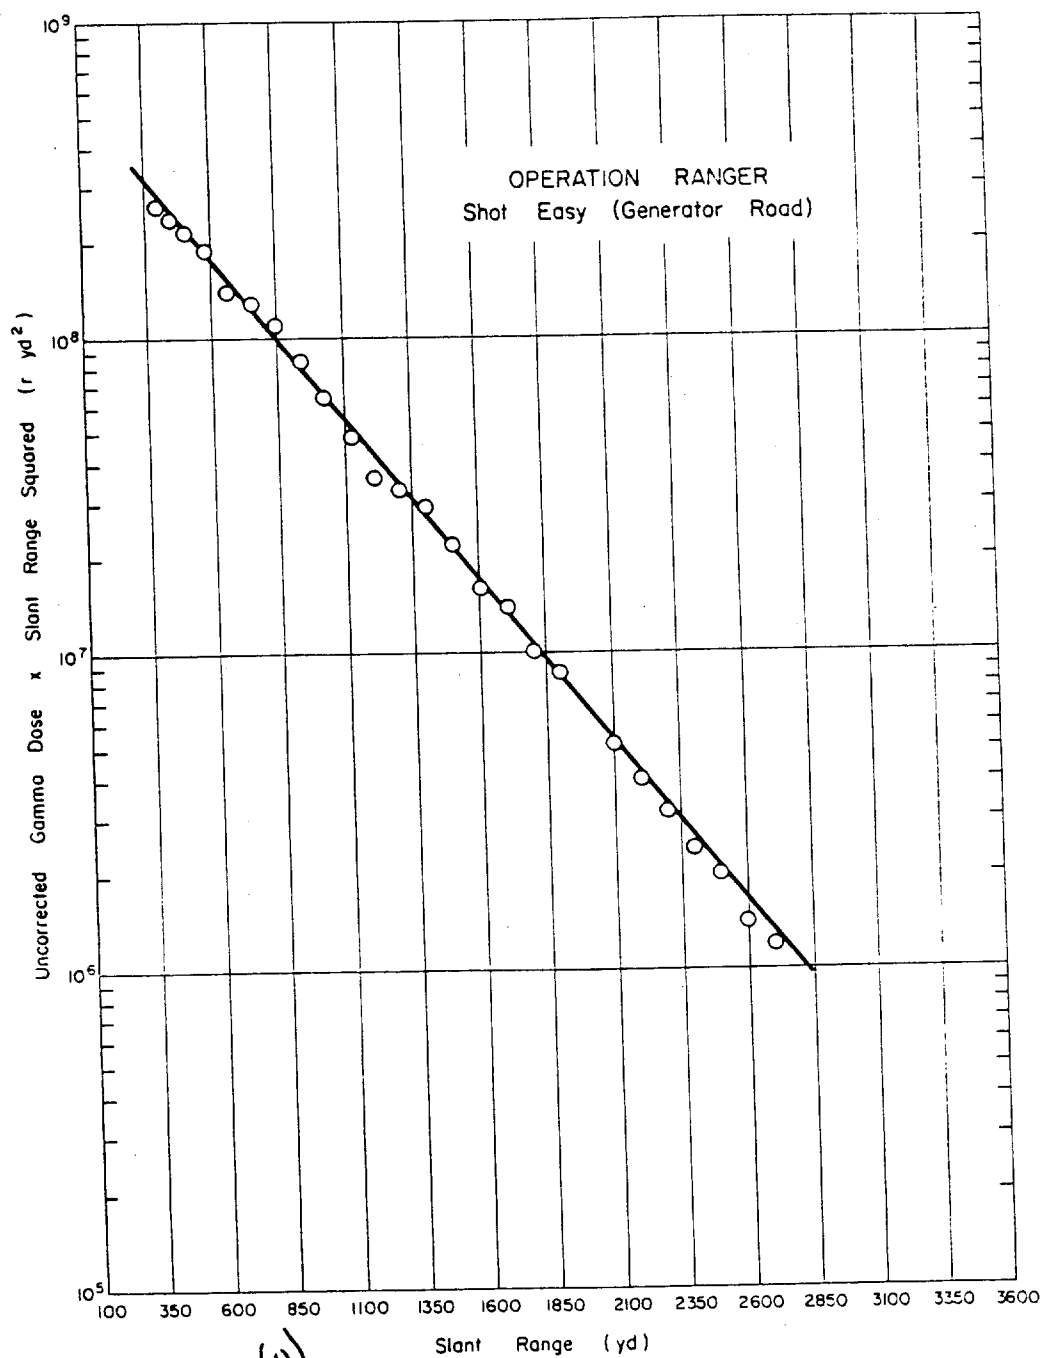


Figure 3.9 (U) ~~(S-RD)~~ Operation Ranger - Shot Easy (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).


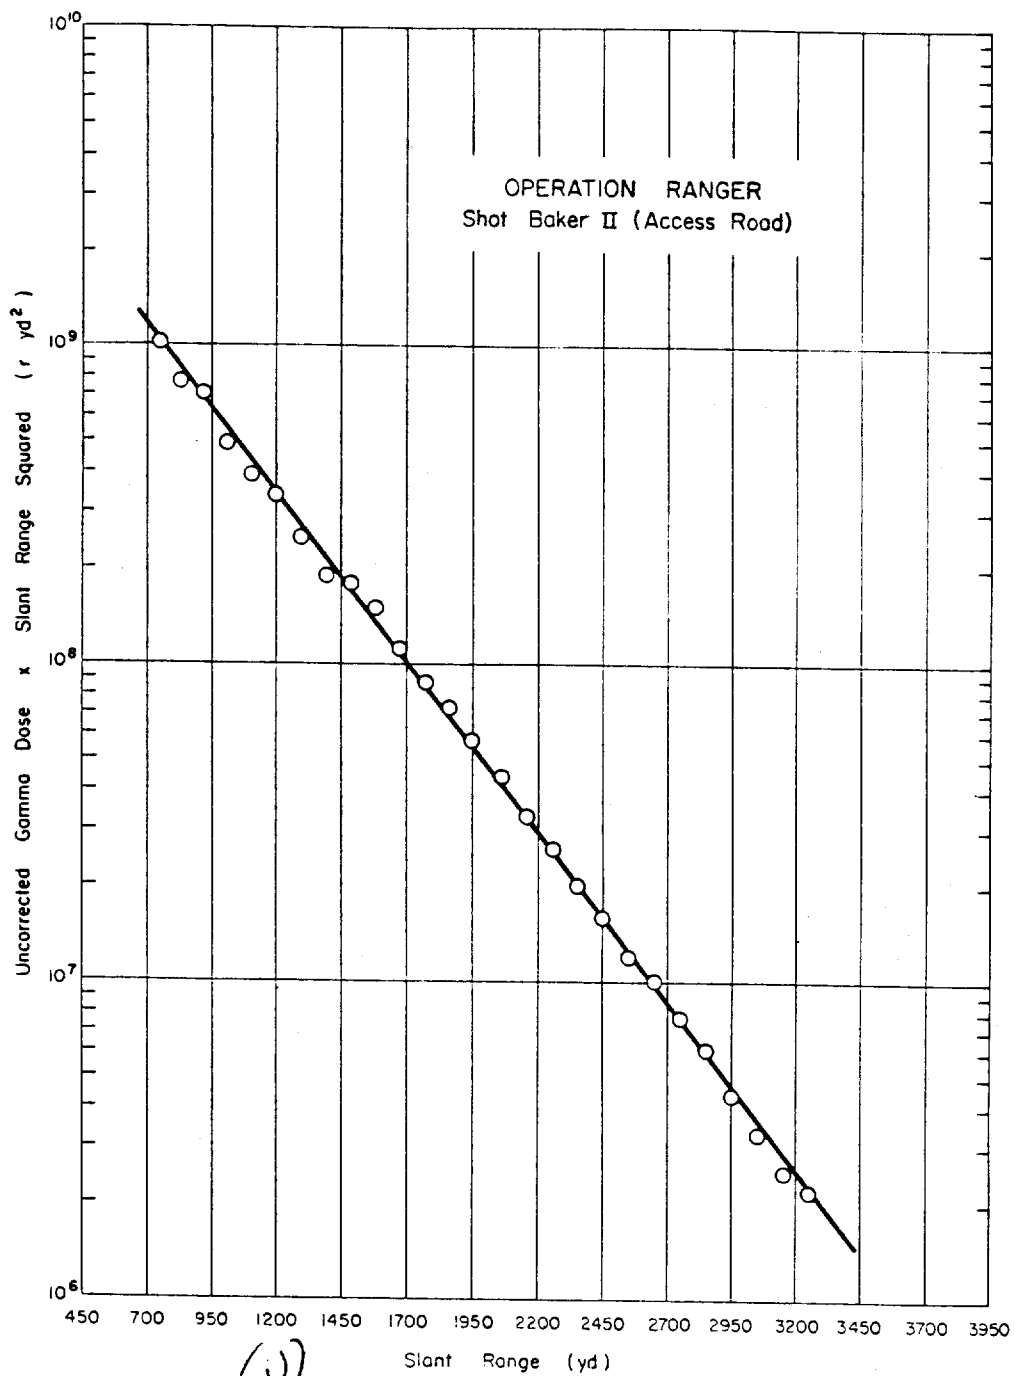


Figure 3.10 (U) ~~(S-AD)~~ Operation Ranger - Shot Baker II (Access Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range(U).

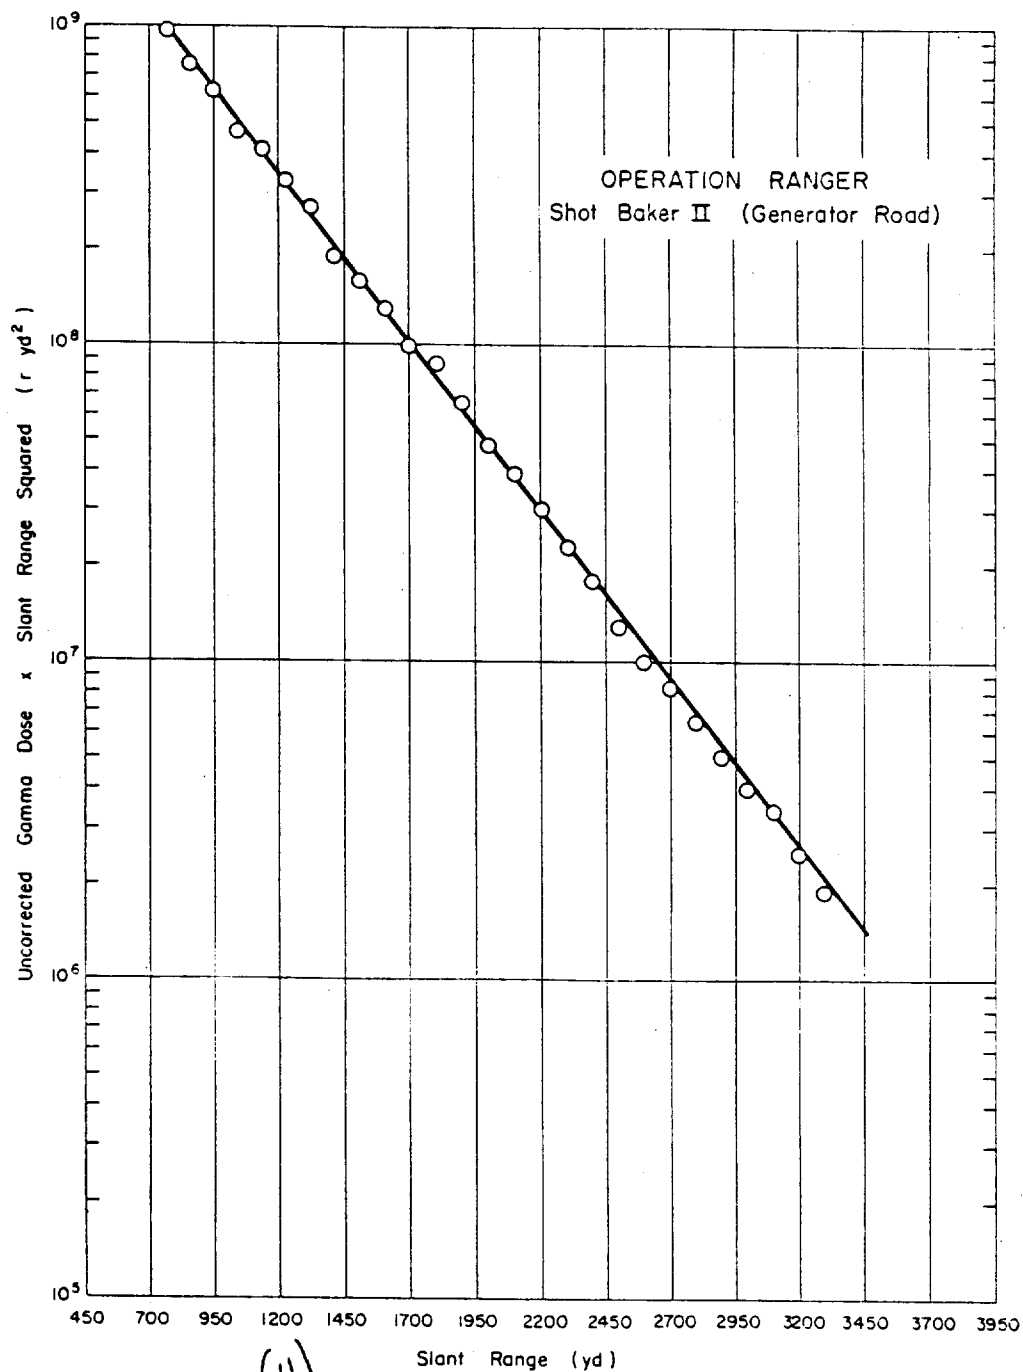

(U)
Figure 3.11 ~~(S-RE)~~ Operation Ranger - Shot Baker II (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

(u)
TABLE 3.12 INITIAL DATA FOR 1700 - OBSERVATION RANDED,
SHOT 1700

Start Range	Azimuth	Film Type	Theor- rected Gamma	Neutron Flux		Shield Type
				Au	S	
yd				n/cm ²	n/cm ²	
1,000	c	Adlux	2,400	5.11x10 ⁹	d	c
1,050	c	Adlux	1,830	4.00x10 ⁹	d	c
1,100	c	Adlux	1,300	1.00x10 ⁹	d	c
1,170	c	Adlux	770	9.00x10 ⁸	d	c
1,370	c	Adlux	450	5.00x10 ⁸	d	c
1,400	c	Adlux	370	3.00x10 ⁸	d	c
1,500	c	Adlux	300	1.60x10 ⁸	d	c
1,600	c	Adlux	110	9.00x10 ⁷	d	c
1,700	c	Adlux	77	5.15x10 ⁷	d	c
1,800	c	Adlux	50	2.70x10 ⁷	d	c
1,900	c	Adlux	30	1.00x10 ⁷	d	c
2,000	c	Adlux	16	5.11x10 ⁶	d	c
2,100	c	Adlux	10	2.70x10 ⁶	d	c
2,200	c	Adlux	23	1.00x10 ⁶	d	c
2,300	c	Adlux	10	6.00x10 ⁵	d	c
2,400	c	Adlux	11.0	4.00x10 ⁵	d	c
2,500	c	Adlux	6.6	2.00x10 ⁵	d	c
2,600	c	Adlux	4.6	1.00x10 ⁵	d	c
2,700	c	Adlux	3.0	7.70x10 ⁴	d	c
2,800	c	Adlux	2.0	4.00x10 ⁴	d	c
2,900	c	Adlux	1.0	2.00x10 ⁴	d	c
3,000	c	Adlux	0.71	1.00x10 ⁴	d	c
3,100	c	Adlux	0.47	5.11x10 ³	d	c
3,200	c	Adlux	0.30	2.70x10 ³	d	c
3,300	c	Adlux	0.17	1.00x10 ³	d	c

(u)
TABLE 3.12 (CONTINUED)

Start Range	Azimuth	Film Type	Theor- rected Gamma	Neutron Flux		Shield Type
				Au	S	
yd			f	n/cm ²	n/cm ²	
1,000	f	Adlux	2,600	5.11x10 ⁹	d	c
1,050	f	Adlux	1,650	3.11x10 ⁹	d	c
1,100	f	Adlux	1,000	1.00x10 ⁹	d	c
1,170	f	Adlux	600	9.00x10 ⁸	d	c
1,370	f	Adlux	300	5.00x10 ⁸	d	c
1,400	f	Adlux	200	3.11x10 ⁸	d	c
1,500	f	Adlux	100	1.00x10 ⁸	d	c
1,600	f	Adlux	77	5.11x10 ⁷	d	c
1,700	f	Adlux	50	2.00x10 ⁷	d	c
1,800	f	Adlux	30	1.00x10 ⁷	d	c
1,900	f	Adlux	16	5.11x10 ⁶	d	c
2,000	f	Adlux	10	2.70x10 ⁶	d	c
2,100	f	Adlux	23	1.00x10 ⁶	d	c
2,200	f	Adlux	10	6.00x10 ⁵	d	c
2,300	f	Adlux	11.0	4.00x10 ⁵	d	c
2,400	f	Adlux	6.6	2.00x10 ⁵	d	c
2,500	f	Adlux	4.6	1.00x10 ⁵	d	c
2,600	f	Adlux	3.0	7.70x10 ⁴	d	c
2,700	f	Adlux	2.0	4.00x10 ⁴	d	c
2,800	f	Adlux	1.0	2.00x10 ⁴	d	c
2,900	f	Adlux	0.71	1.00x10 ⁴	d	c
3,000	f	Adlux	0.47	5.11x10 ³	d	c
3,100	f	Adlux	0.30	2.70x10 ³	d	c
3,200	f	Adlux	0.17	1.00x10 ³	d	c

^a Theoretical
b Gamma
c Au
d No neutron exposed.
e Au foils attached to angle from stake.
f 1700

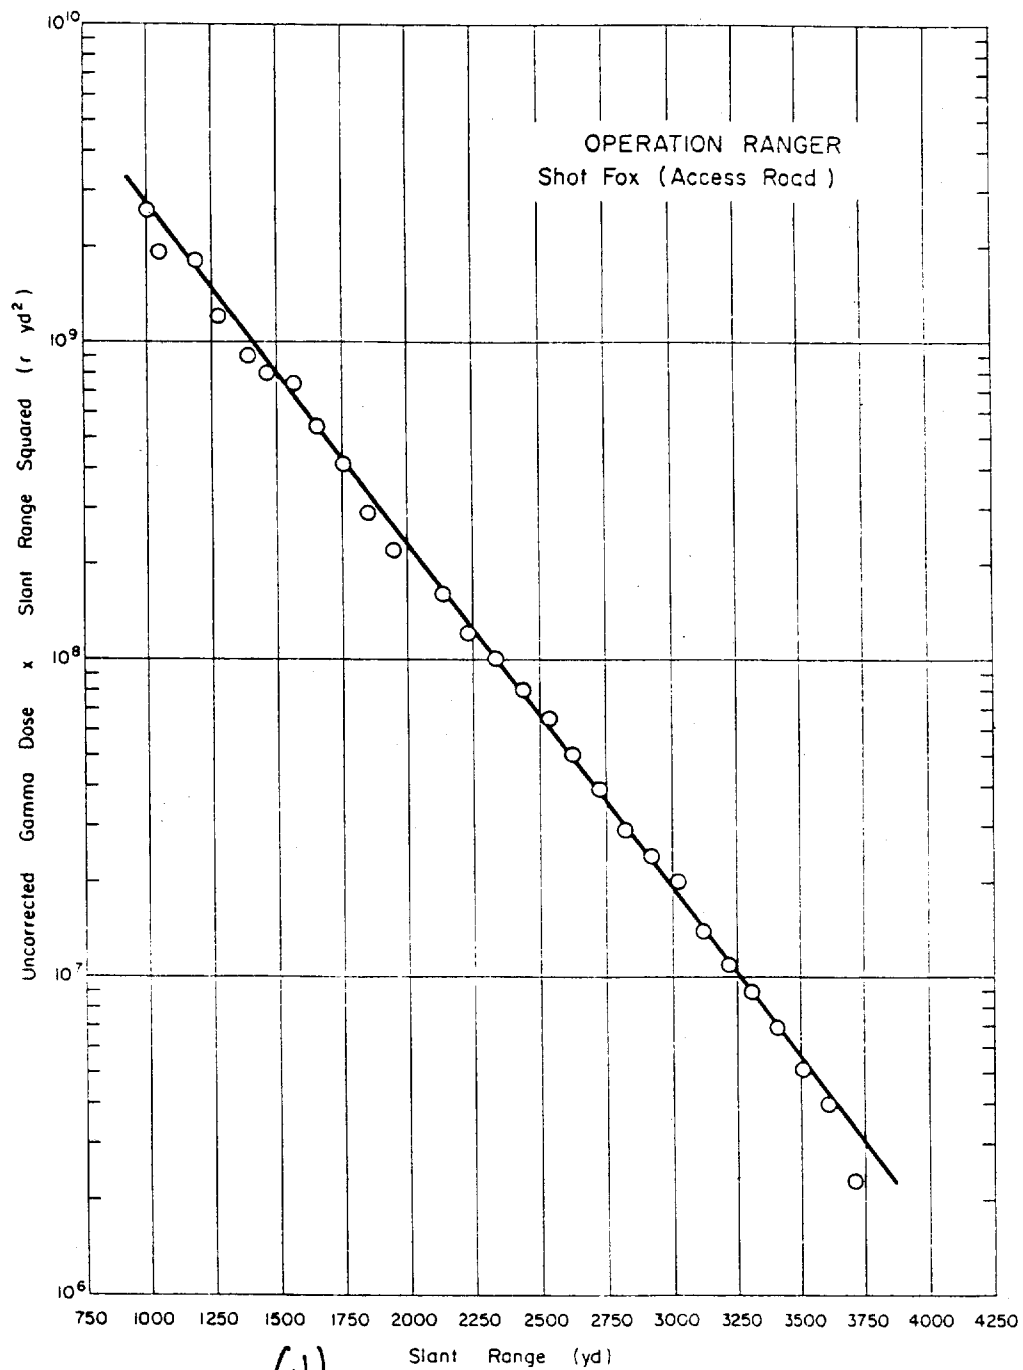


Figure 3.12 (U) (S-RD) Operation Ranger - Shot Fox (Access Road)-
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

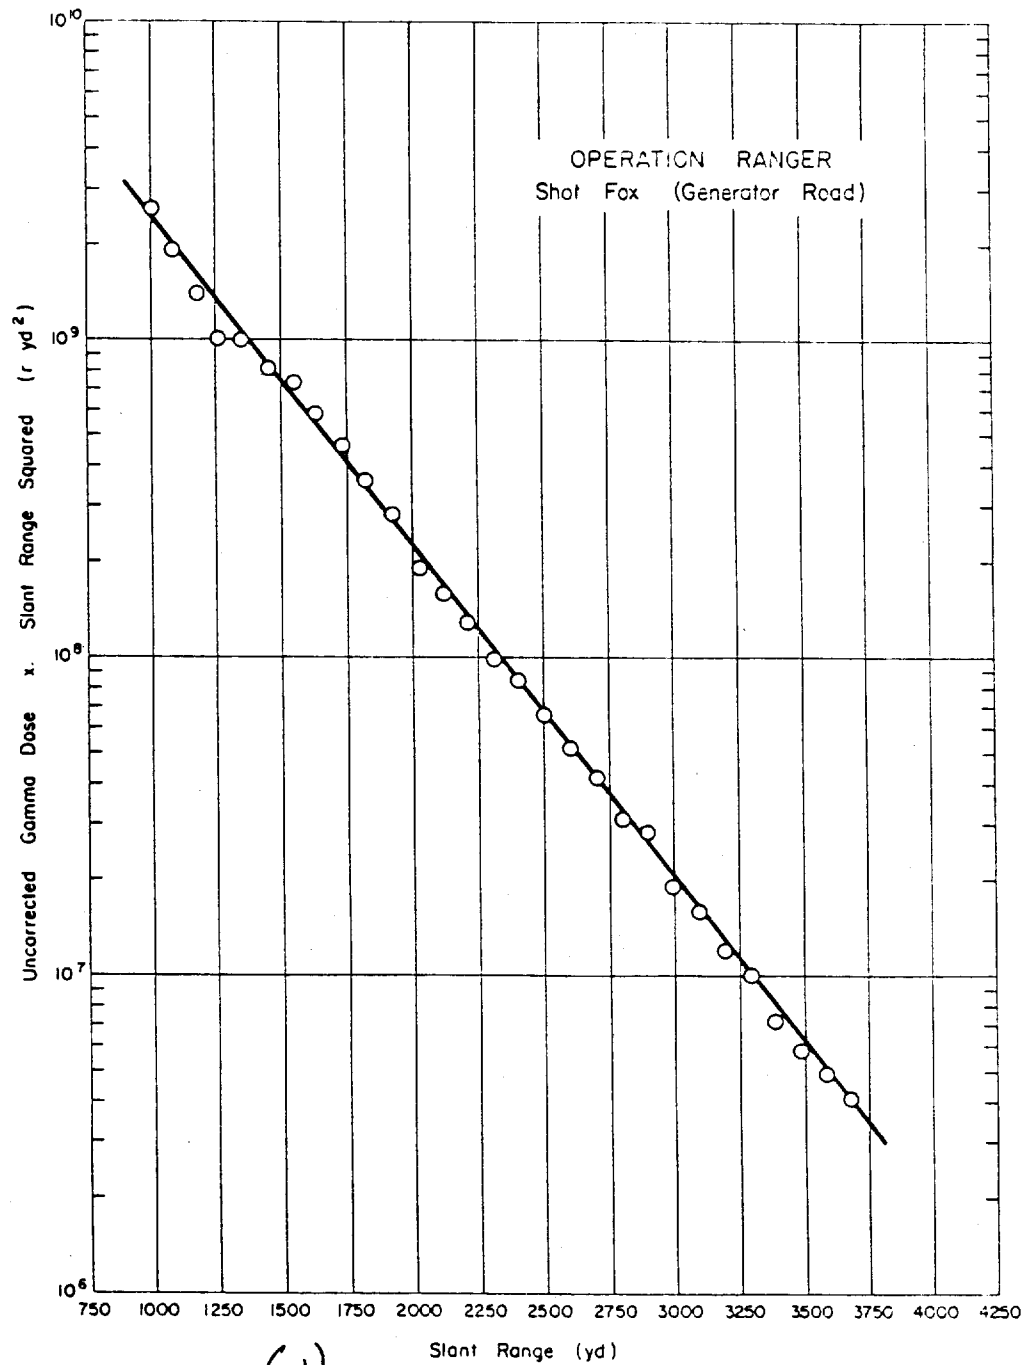


Figure 3.13 (S-^(U)RB) Operation Ranger - Shot Fox (Generator Road) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

(S-RD) TABLE 3.13 SHOT INFORMATION - OPERATION GREENHOUSE

Shot Designation	Date and Time Fired	Name of Device	Location and Type	Height of Burst	Total Fission
Dog	7 April 1951 1833:57 GMT		Yvonne-Tower	300	
Easy	20 April 1951 1827:00 GMT		Janet-Tower	300	46
George	8 May 1951 2130:00 GMT		Ruth-Tower	200	
Item	24 May 1951 1816:59 GMT		Janet-Tower	200	

^aNot reported.

(U) TABLE 3.14 METEOROLOGICAL DATA - OPERATION GREENHOUSE

Shot	Pressure	Temperature	Density	ρ/ρ_s	$(\rho_s/\rho)^2$
	mb	°K	$\text{g/cm}^3 \times 10^3$		
Dog	1000	298	1.17	0.90	1.23
Easy	1000	298	1.17	0.90	1.23
George	1000	300	1.17	0.90	1.23
Item	1000	304	1.15	0.89	1.26

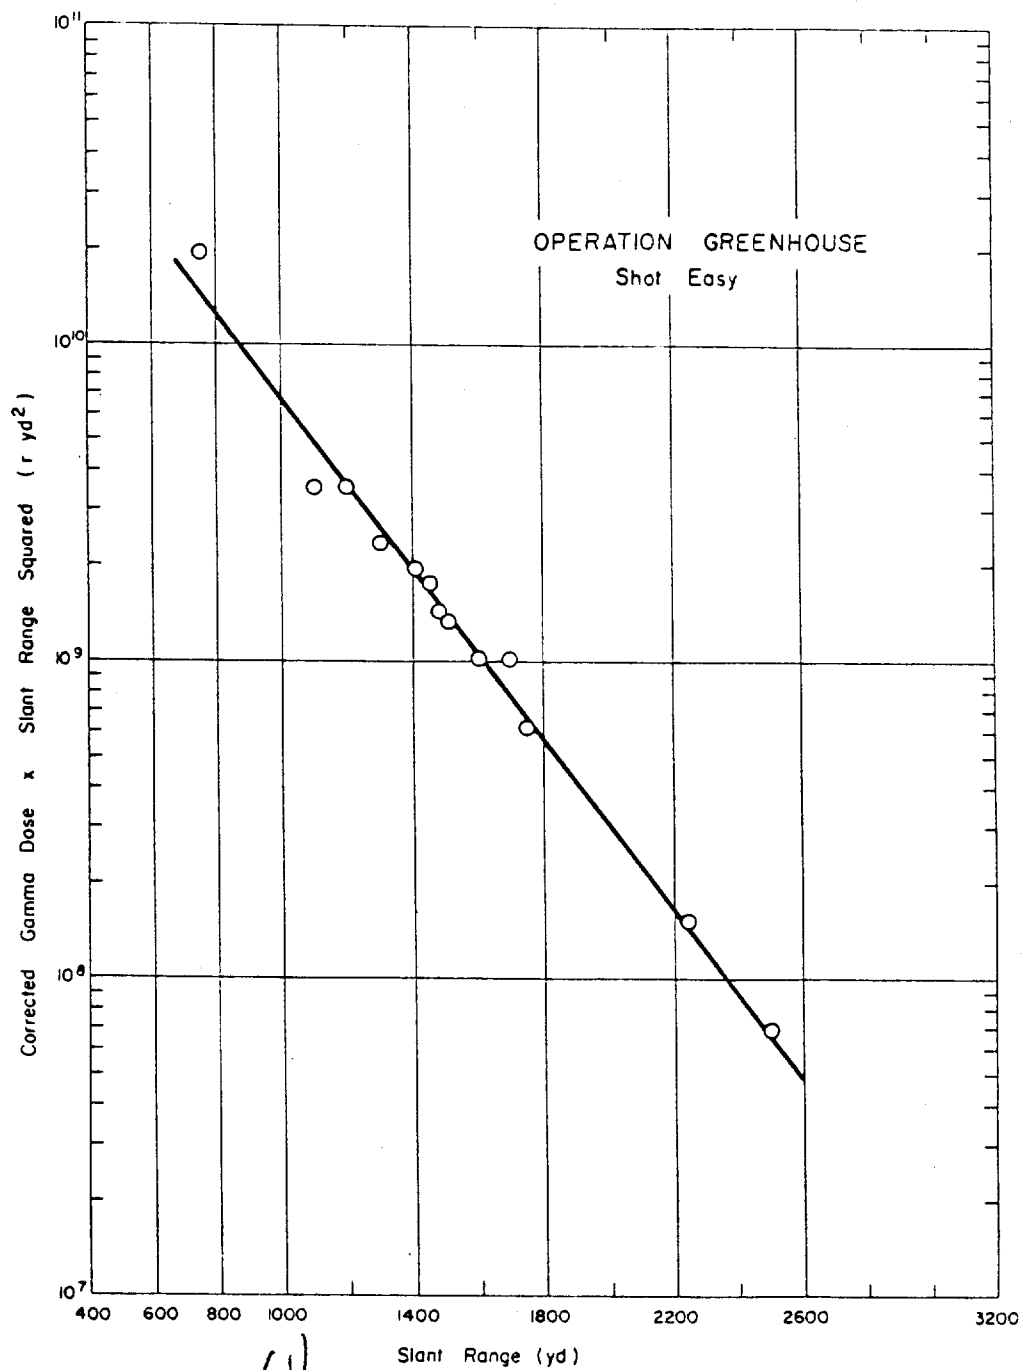


Figure 3.15 (S-10) ^(U) Operation Greenhouse - Shot Easy -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

Pages 68 thru 70 Deleted.


(S-RO) TABLE 3.19 SHOT INFORMATION - OPERATION BUSTER-JANGLE

Shot Designation	Date and Time Fired	Location and Type	Height of Burst		Total Fission	
			ft	kt	kt	kt
Able	22 Oct 1951 1400 GMT	Area 7-Tower	100	1.8 ^a	1.8 ^a	1.8 ^a
Baker	28 Oct 1951 1520:09 GMT	Area 7-Air	1118	3.5	3.5	3.5
Charlie	30 Oct 1951 1500:29 GMT	Area 7-Air	1132	14.0	14.0	14.0
Dog	1 Nov 1951 1530:01 GMT	Area 7-Air	1417	21	21	21
Easy	5 Nov 1951 1629:58 GMT	Area 7-Air	1314	31	31	31
Surface	19 Nov 1951 1700 GMT	Area 9-Surface	3.5	1.2	1.2	1.2
Underground	29 Nov 1951 1959:59 GMT	Area 10-Underground	-17	1.2	1.2	1.2

^aGrams

(U) TABLE 3.20 METEOROLOGICAL DATA - OPERATION BUSTER-JANGLE

Shot	Pressure	Temperature	Density		$(\rho_s/\rho)^2$	
			$\text{g/cm}^3 \times 10^3$	ρ/ρ_s	$(\rho_s/\rho)^2$	
Baker	877	284.4	1.05	0.81	1.53	
Charlie	872	278.3	1.06	0.82	1.49	
Dog	876	288.5	1.03	0.79	1.60	
Easy	878	284.3	1.05	0.81	1.53	
Surface	871.5	274	1.10	0.85	1.39	

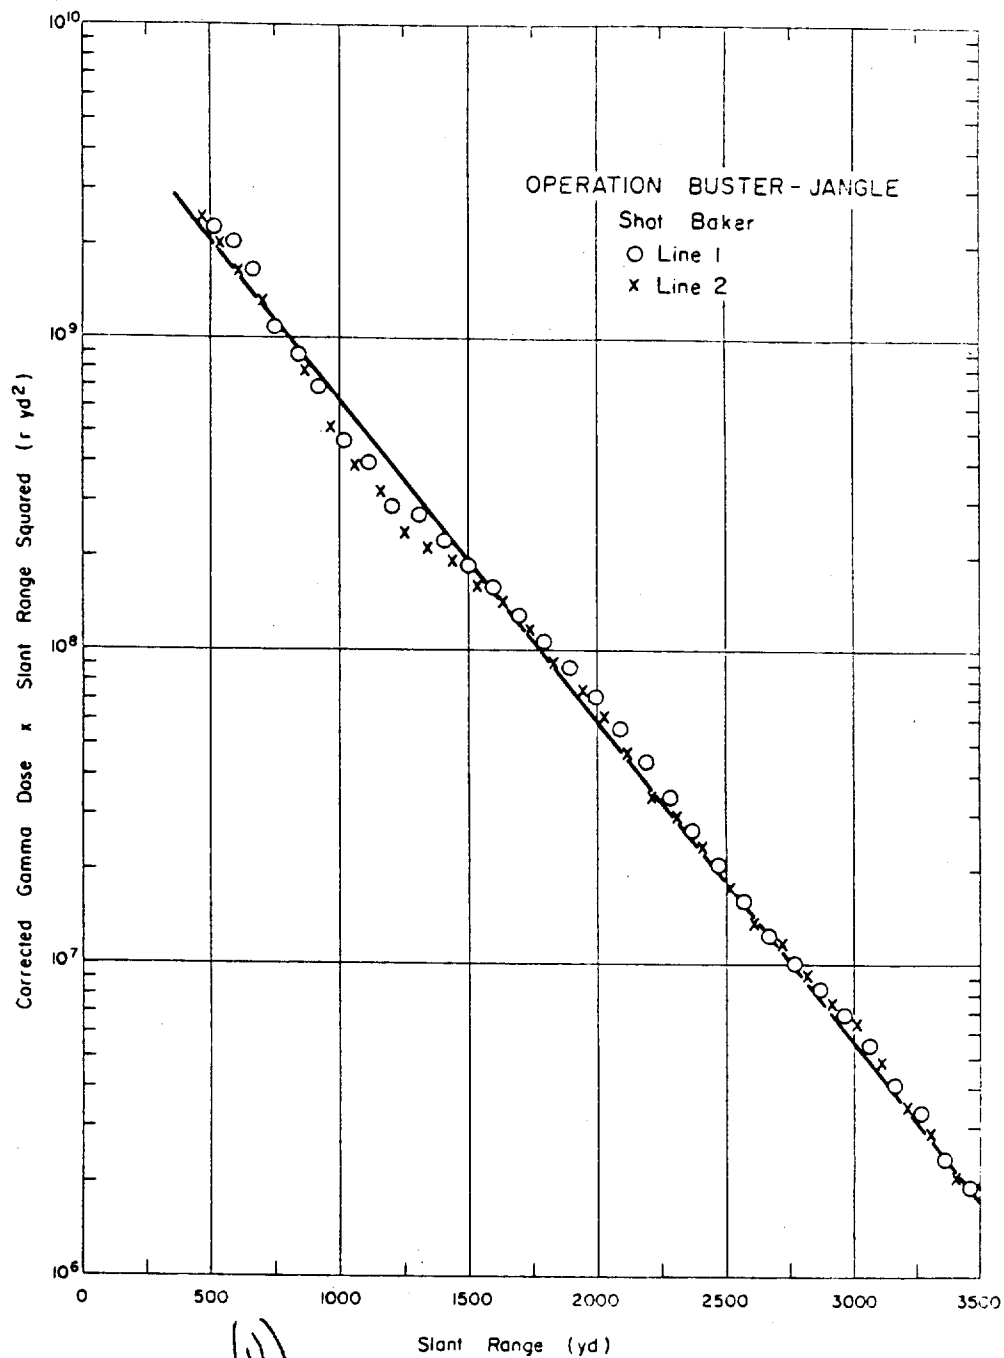

(U)
Figure 3.18 ~~(S-RD)~~ Operation Buster-Jangle - Shot Baker -
Corrected gamma-dose-times-slant-range
squared versus slant-range (U).

(6)

(S-60) TABLE 3.22 INITIAL GAMMA DOSE DATA - DIRECTOR PLANT-JANGLE, SIRT CHARLIE

Line 1


Slant Azimuth Range	Altitude	Uncorrected Gamma Dose	Gamma	Air Thermal Correction	Fast Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Corrected Gamma Dose	Soil Contribution
yd			n/cm ²	F	F		F	F	F		F	F
590	a	500-0	1.82x10 ¹²	0.07	7.24	b	0.53	1204	<29,000	1.0	<29,000	503
670	a	502-0	5.53x10 ¹¹	6.5	4.0	b	1.07	304	14,600	1.0	14,600	201
750	a	504-0	2.41x10 ¹¹	27	2.4	b	47	315	8,385	1.0	8,385	103
840	a	506-0	1.12x10 ¹¹	11	1.6	b	22	171	2,510	1.0	2,510	52
930	a	508-0	5.81x10 ¹⁰	12	1.2	b	11	35	2,570	1.0	2,570	27
1,020	a	1250	3.81x10 ¹⁰	7.0	6.4	b	7.1	20.5	1,890	1.0	1,890	14
1,110	a	1250	1.89x10 ¹⁰	4.1	3.7	b	4.0	11.8	1,260	1.0	1,260	6.1
1,210	a	1250	1.12x10 ¹⁰	2.3	1.6	b	2.0	5.9	864	1.0	864	4.2
1,300	a	1250	6.25x10 ⁹	1.3	1.1	b	1.0	3.4	587	1.0	587	2.5
1,410	a	1250	3.67x10 ⁹	0.75	0.56	b	0.71	2.02	378	1.0	378	1.3
1,500	a	600	2.04x10 ⁹	0.42	0.32	b	0.41	1.15	244	1.0	244	0.8
1,590	a	600	1.20x10 ⁹	0.27	0.08	b	0.21	0.56	171	1.0	171	0.5
1,680	a	600	6.72x10 ⁸	0.15	0.04	b	0.13	0.32	100	1.0	100	0.3
1,770	a	600	5.04x10 ⁸	0.12	0.02	b	0.10	0.24	76	1.0	76	0.2
1,860	a	600	2.10x10 ⁸	0.12	0.02	b	0.10	0.24	46	1.0	46	0.1
1,950	a	600	1.15x10 ⁸	0.12	0.02	b	0.10	0.24	37	1.0	37	0.1
2,040	a	600	3.74x10 ⁷	0.12	0.02	b	0.10	0.24	25	1.0	25	0.1
2,130	a	510	2.09x10 ⁷	0.12	0.02	b	0.10	0.24	17	1.0	17	0.1
2,220	a	510	1.15x10 ⁷	0.12	0.02	b	0.10	0.24	14	1.0	14	0.1
2,310	a	502	3.56x10 ⁶	0.12	0.02	b	0.10	0.24	10.0	1.0	10.0	0.1
2,400	a	502	1.97x10 ⁶	0.12	0.02	b	0.10	0.24	6.5	1.0	6.5	0.1
2,490	a	502	1.16x10 ⁶	0.12	0.02	b	0.10	0.24	5.2	1.0	5.2	0.1
2,580	a	502	6.12x10 ⁵	0.12	0.02	b	0.10	0.24	3.3	1.0	3.3	0.1
2,670	a	502	3.05x10 ⁵	0.12	0.02	b	0.10	0.24	2.3	1.0	2.3	0.1
2,760	a	502	1.99x10 ⁵	0.12	0.02	b	0.10	0.24	1.7	1.0	1.7	0.1
2,850	a	502	1.12x10 ⁵	0.12	0.02	b	0.10	0.24	1.3	1.0	1.3	0.1
2,940	a	502	6.50x10 ⁴	0.12	0.02	b	0.10	0.24	0.8	1.0	0.8	0.1
3,030	a	502	3.58x10 ⁴	0.12	0.02	b	0.10	0.24	0.7	1.0	0.7	0.1
3,120	a	502	1.96x10 ⁴	0.12	0.02	b	0.10	0.24	0.4	1.0	0.4	0.1
3,210	a	502	1.01x10 ⁴	0.12	0.02	b	0.10	0.24	0.3	1.0	0.3	0.1
3,300	a	502	5.41x10 ³	0.12	0.02	b	0.10	0.24	0.2	1.0	0.2	0.1
3,390	a	502	2.89x10 ³	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1
3,480	a	502	1.51x10 ³	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1
3,570	a	502	8.10x10 ²	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1
3,660	a	502	4.10x10 ²	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1
3,750	a	502	2.10x10 ²	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1
3,840	a	502	1.10x10 ²	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1
3,930	a	502	5.10x10 ¹	0.12	0.02	b	0.10	0.24	0.1	1.0	0.1	0.1

*Film holders attached to reaction tank.

(C) TABLE (Continued)
Line 2

Slant Range	Azi- muth	File Type	Uncor- rected Gamma Dose	n	n/cm ²	Thermal Convec- tion		Shield Type		Shield Convec- tion		Total Convec- tion		Cor- rected Gamma Dose		Atten- uation Factor		Final Corrected Gamma Dose		Coll Contribu- tion	
						F	F														
yd			F																		
520	a	545-0	>40,000	5.10x10 ¹²	5.10x10 ¹²	589	1140	b	1000			2729		>27,000		1.0		>27,000		1210	
530	a	545-0	15,660	1.57x10 ¹²	1.57x10 ¹²	178	655	b	304			1137		14,520		1.0		14,520		445	
580	a	545-0	8,440	4.50x10 ¹¹	4.50x10 ¹¹	96	379	b	92			530		7,910		1.0		7,910		185	
700	a	545-0	5,090	2.51x10 ¹¹	2.51x10 ¹¹	59	235	b	45			300		4,750		1.0		4,750		154	
850	a	545-0	3,480	1.01x10 ¹¹	1.01x10 ¹¹	41	134	b	30			175		3,320		1.0		3,320		103	
940	a	545-0	2,440	5.55x10 ¹⁰	5.55x10 ¹⁰	31	11	b	11			104		2,410		1.0		2,410		45	
1,050	a	545-0	1,740	3.5x10 ¹⁰	3.5x10 ¹⁰	21	9.1	b	6.0			73		1,700		1.0		1,700		34	
1,120	a	545-0	1,690	1.91x10 ¹⁰	1.91x10 ¹⁰	19	3.4	b	4.0			6.0		1,650		1.0		1,650		15	
1,250	a	545-0	835	6.10x10 ⁹	6.10x10 ⁹	13	1.8	b	2.0			3.4		829		1.0		829		7.5	
1,310	a	545-0	540	3.47x10 ⁹	3.47x10 ⁹	9.0	0.94	b	1.0			2.0		537		1.0		537		4.2	
1,410	a	545-0	320	1.97x10 ⁹	1.97x10 ⁹	5.0	0.48	b	0.70			1.04		318		1.0		318		2.1	
1,510	a	545-0	170	1.13x10 ⁹	1.13x10 ⁹	3.0	0.26	b	0.40			0.55		174		1.0		174		1.0	
1,600	a	545-0	130	6.30x10 ⁸	6.30x10 ⁸	2.0	0.16	b	0.30			0.38		110		1.0		110		0.7	
1,700	a	545-0	80	3.57x10 ⁸	3.57x10 ⁸	1.0	0.09	b	0.10			0.28		77		1.0		77		0.4	
1,800	a	545-0	57	1.96x10 ⁸	1.96x10 ⁸	0.7	0.05	b	0.07			0.20		57		1.0		57		0.3	
1,900	a	545-0	40	1.09x10 ⁸	1.09x10 ⁸	0.5	0.04	b	0.05			0.18		40		1.0		40		0.2	
2,000	a	545-0	26	6.77x10 ⁷	6.77x10 ⁷	0.3	0.04	b	0.04			0.10		26		1.0		26		0.1	
2,100	a	545-0	17	3.59x10 ⁷	3.59x10 ⁷	0.2	0.04	b	0.04			0.08		17		1.0		17		0.1	
2,200	a	545-0	12	1.86x10 ⁷	1.86x10 ⁷	0.1	0.04	b	0.04			0.06		12		1.0		12		0.1	
2,300	a	545-0	8.0	9.6x10 ⁶	9.6x10 ⁶	0.1	0.04	b	0.04			0.05		8.0		1.0		8.0		0.1	
2,400	a	545-0	5.0	5.20x10 ⁶	5.20x10 ⁶	0.1	0.04	b	0.04			0.04		5.0		1.0		5.0		0.1	
2,500	a	545-0	3.0	2.6x10 ⁶	2.6x10 ⁶	0.1	0.04	b	0.04			0.03		3.0		1.0		3.0		0.1	
2,600	a	545-0	2.0	1.6x10 ⁶	1.6x10 ⁶	0.1	0.04	b	0.04			0.03		2.0		1.0		2.0		0.1	
2,700	a	545-0	1.5	1.0x10 ⁶	1.0x10 ⁶	0.1	0.04	b	0.04			0.03		1.5		1.0		1.5		0.1	
2,800	a	545-0	1.0	6.0x10 ⁵	6.0x10 ⁵	0.1	0.04	b	0.04			0.03		1.0		1.0		1.0		0.1	
2,900	a	545-0	0.7	3.5x10 ⁵	3.5x10 ⁵	0.1	0.04	b	0.04			0.03		0.7		1.0		0.7		0.1	
3,000	a	545-0	0.5	2.0x10 ⁵	2.0x10 ⁵	0.1	0.04	b	0.04			0.03		0.5		1.0		0.5		0.1	
3,100	a	545-0	0.4	1.0x10 ⁵	1.0x10 ⁵	0.1	0.04	b	0.04			0.03		0.4		1.0		0.4		0.1	
3,200	a	545-0	0.3	5.0x10 ⁴	5.0x10 ⁴	0.1	0.04	b	0.04			0.03		0.3		1.0		0.3		0.1	
3,300	a	545-0	0.2	2.5x10 ⁴	2.5x10 ⁴	0.1	0.04	b	0.04			0.03		0.2		1.0		0.2		0.1	
3,400	a	545-0	0.1	1.0x10 ⁴	1.0x10 ⁴	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	
3,500	a	545-0	0.1	5.0x10 ³	5.0x10 ³	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	
3,600	a	545-0	0.1	2.5x10 ³	2.5x10 ³	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	
3,700	a	545-0	0.1	1.0x10 ³	1.0x10 ³	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	
3,800	a	545-0	0.1	5.0x10 ²	5.0x10 ²	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	
3,900	a	545-0	0.1	2.5x10 ²	2.5x10 ²	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	
4,000	a	545-0	0.1	1.0x10 ²	1.0x10 ²	0.1	0.04	b	0.04			0.03		0.1		1.0		0.1		0.1	

NOTE:
The film cathode is etched to high-voltage anodes.

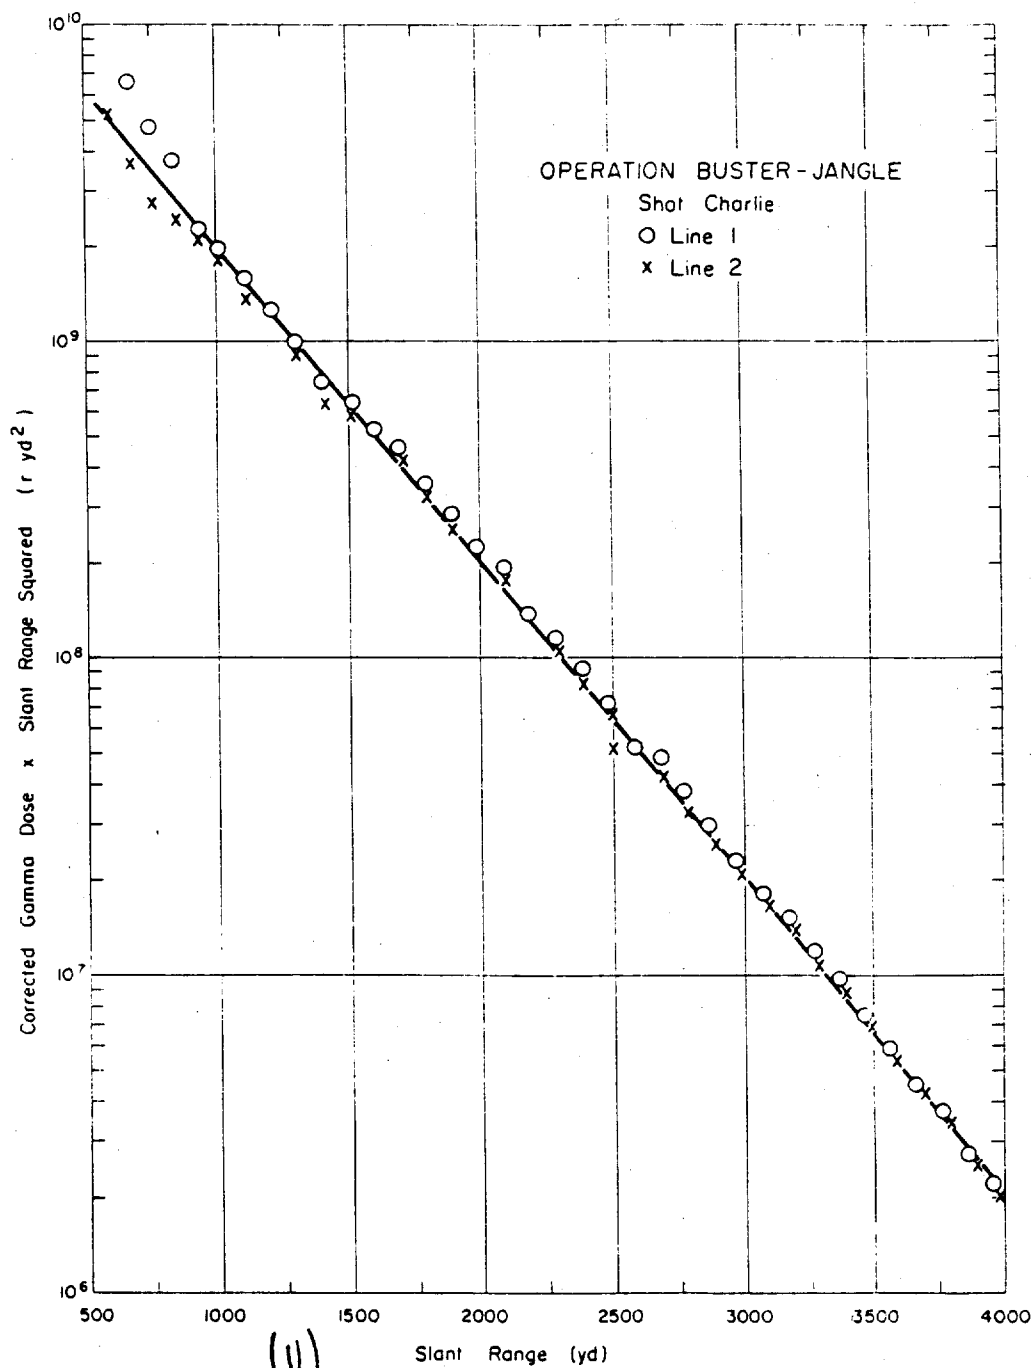

(U)
 Figure 3.19 (S-RD) Operation Buster-Jangle - Shot Charlie -
 Corrected gamma-dose-times-slant-range-
 squared versus slant-range (U).

(5)

TABLE 1 INITIAL GAMMA RADIATION - OPERATION BETER-JARILE, SHOT DOG

Line 1

Slant Range m	Alt. m	Film Type	Uncor- rected Gamma Dose	Au 1/cm ²	Bottom Film	Au Thermal Correc- tion		Shield Type	Shield Correc- tion		Total Correc- tion	Cor- rected Gamma Dose		Atten- uation Factor	Final Corrected Gamma Dose	Soil Contri- bution
						r	f		r	f		r	f			
700	540	a	>30,000	6.9x10 ⁻¹		79	552	b	134	765	765	>39,000	1.0	289,000	489	
700	540	a	15,660	3.0x10 ⁻¹		35	338	b	29	432	432	15,210	1.0	15,210	150	
700	540	a	11,300	1.5x10 ⁻¹		17	197	b	15	243	243	11,100	1.0	11,100	79	
900	540	a	6,760	7.7x10 ⁻²		9.8	110	b	15	134.8	134.8	6,560	1.0	6,560	43	
1,000	540	a	3,450	4.6x10 ⁻²		5.3	66	b	9.0	80.3	80.3	3,370	1.0	3,370	29	
1,100	540	a	2,460	2.7x10 ⁻²		3.6	46	b	5.2	46.4	46.4	2,400	1.0	2,400	14	
1,200	540	a	1,570	1.5x10 ⁻²		3.1	32	b	2.9	29	29	1,500	1.0	1,500	6.9	
1,300	540	a	1,090	9.6x10 ⁻³		1.8	17	b	1.7	17	17	1,000	1.0	1,000	3.6	
1,400	540	a	715	5.5x10 ⁻³		1.1	10	b	1.0	10	10	712	1.0	712	1.2	
1,500	540	a	460	2.9x10 ⁻³		0.59	0.48	b	0.60	107	107	458	1.0	458	0.5	
1,600	540	a	300	1.70x10 ⁻³		0.35	0.24	b	0.34	57.1	57.1	297	1.0	297	0.3	
1,700	540	a	210	9.4x10 ⁻⁴		0.19	0.16	b	0.19	0.23	0.23	190	1.0	190	0.2	
1,800	540	a	110	5.5x10 ⁻⁴		0.12	0.08	b	0.11	0.13	0.13	100	1.0	100	0.1	
1,900	540	a	84	3.1x10 ⁻⁴		0.13	0.08	b	0.11	0.13	0.13	63	1.0	63	0.1	
2,000	540	a	63	1.7x10 ⁻⁴		0.13	0.08	b	0.11	0.13	0.13	42	1.0	42	0.1	
2,100	540	a	45	9.4x10 ⁻⁵		0.13	0.08	b	0.11	0.13	0.13	29	1.0	29	0.1	
2,200	540	a	35	5.6x10 ⁻⁵		0.13	0.08	b	0.11	0.13	0.13	20	1.0	20	0.1	
2,300	540	a	24	3.0x10 ⁻⁵		0.13	0.08	b	0.11	0.13	0.13	12	1.0	12	0.1	
2,400	540	a	17	1.70x10 ⁻⁵		0.13	0.08	b	0.11	0.13	0.13	10	1.0	10	0.1	
2,500	540	a	12	9.4x10 ⁻⁶		0.13	0.08	b	0.11	0.13	0.13	7.1	1.0	7.1	0.1	
2,600	540	a	9.1	5.5x10 ⁻⁶		0.13	0.08	b	0.11	0.13	0.13	5.1	1.0	5.1	0.1	
2,700	540	a	7.1	3.1x10 ⁻⁶		0.13	0.08	b	0.11	0.13	0.13	4.1	1.0	4.1	0.1	
2,800	540	a	5.1	1.7x10 ⁻⁶		0.13	0.08	b	0.11	0.13	0.13	3.1	1.0	3.1	0.1	
2,900	540	a	3.6	9.4x10 ⁻⁷		0.13	0.08	b	0.11	0.13	0.13	2.2	1.0	2.2	0.1	
3,000	540	a	2.7	5.5x10 ⁻⁷		0.13	0.08	b	0.11	0.13	0.13	1.7	1.0	1.7	0.1	
3,100	540	a	1.9	3.0x10 ⁻⁷		0.13	0.08	b	0.11	0.13	0.13	1.2	1.0	1.2	0.1	
3,200	540	a	1.2	1.7x10 ⁻⁷		0.13	0.08	b	0.11	0.13	0.13	0.8	1.0	0.8	0.1	
3,300	540	a	0.9	9.4x10 ⁻⁸		0.13	0.08	b	0.11	0.13	0.13	0.6	1.0	0.6	0.1	
3,400	540	a	0.7	5.5x10 ⁻⁸		0.13	0.08	b	0.11	0.13	0.13	0.4	1.0	0.4	0.1	
3,500	540	a	0.5	3.1x10 ⁻⁸		0.13	0.08	b	0.11	0.13	0.13	0.3	1.0	0.3	0.1	
3,600	540	a	0.3	1.7x10 ⁻⁸		0.13	0.08	b	0.11	0.13	0.13	0.2	1.0	0.2	0.1	
3,700	540	a	0.2	9.4x10 ⁻⁹		0.13	0.08	b	0.11	0.13	0.13	0.1	1.0	0.1	0.1	

Slant Range Film Type Altitude to top of film above

(1)

(S-407) TABLE 3-23 (Continued)

Line 2

Start Range	End Range	Film Type	Uncor-rected Gamma Dose	Exposure Time	Au Thermal Correction	Fast Correction	Shield Type	Shield Correction	Total Correction	Cor-rected Gamma Dose	Atten-uation Factor	Final Gamma Dose	Soil Contri-bution
yd			r	n/cm ²	r	r	b	r	r	r	r	r	r
620	548-0	a	>30,000	1.91x10 ²²	217	965	b	370	1952	>28,000	1.0	>28,000	642
650	548-0	a	22,600	7.67x10 ²¹	87	620	b	149	856	21,700	1.0	21,700	316
770	548-0	a	15,660	3.56x10 ²¹	37	379	b	63	479	15,180	1.0	15,180	169
850	548-0	a	9,570	1.63x10 ²¹	19	210	b	32	261	9,310	1.0	9,310	86
940	548-0	a	5,740	8.36x10 ²⁰	9.4	117	b	16	142.4	5,600	1.0	5,600	46
1,020	548-0	a	3,930	4.99x10 ²⁰	5.6	69	b	10	4.6	3,750	1.0	3,750	26
1,110	12-90	a	2,610	2.99x10 ²⁰	6.0	6.1	b	5.6	17.7	2,590	1.0	2,590	12
1,210	12-90	a	1,650	1.62x10 ²⁰	3.4	3.2	b	3.1	9.6	1,640	1.0	1,640	7.2
1,300	12-90	a	1,000	9.45x10 ¹⁹	1.1	1.6	b	1.8	5.3	999	1.0	999	3.6
1,400	12-90	a	650	5.57x10 ¹⁹	1.1	1.0	b	1.1	3.2	647	1.0	647	1.2
1,500	12-90	a	470	2.99x10 ¹⁹	0.60	0.50	b	0.56	1.66	463	1.0	463	1.2
1,600	12-90	a	310	1.61x10 ¹⁹	0.37	0.28	b	0.34	0.99	299	1.0	299	1.2
1,700	12-90	a	200	9.38x10 ¹⁸	0.20	0.14	b	0.19	0.53	177	1.0	177	1.2
1,800	60X	a	145	5.89x10 ¹⁸	0.11	0.06	b	0.11	0.28	146	1.0	146	1.2
1,900	60X	a	110	3.26x10 ¹⁸	0.07	0.02	b	0.06	0.15	110	1.0	110	1.2
2,000	60X	a	83	1.81x10 ¹⁸	0.07	0.02	b	0.06	0.15	82	1.0	82	1.2
2,100	60X	a	62	1.07x10 ¹⁸	0.07	0.02	b	0.06	0.15	62	1.0	62	1.2
2,200	60X	a	47	5.92x10 ¹⁷	0.07	0.02	b	0.06	0.15	47	1.0	47	1.2
2,300	60X	a	32	3.40x10 ¹⁷	0.07	0.02	b	0.06	0.15	32	1.0	32	1.2
2,400	60X	a	23	1.82x10 ¹⁷	0.07	0.02	b	0.06	0.15	23	1.0	23	1.2
2,500	60X	a	17	9.84x10 ¹⁶	0.07	0.02	b	0.06	0.15	17	1.0	17	1.2
2,550	60X	a	13	5.65x10 ¹⁶	0.07	0.02	b	0.06	0.15	13	1.0	13	1.2
2,650	60X	a	9.6	3.26x10 ¹⁶	0.07	0.02	b	0.06	0.15	9.6	1.0	9.6	1.2
2,750	60X	a	6.6	1.81x10 ¹⁶	0.07	0.02	b	0.06	0.15	6.6	1.0	6.6	1.2
2,850	60X	a	4.8	1.01x10 ¹⁶	0.07	0.02	b	0.06	0.15	4.8	1.0	4.8	1.2
2,950	60X	a	3.5	5.57x10 ¹⁵	0.07	0.02	b	0.06	0.15	3.5	1.0	3.5	1.2
3,050	60X	a	2.6	3.15x10 ¹⁵	0.07	0.02	b	0.06	0.15	2.6	1.0	2.6	1.2
3,150	60X	a	1.8	1.72x10 ¹⁵	0.07	0.02	b	0.06	0.15	1.8	1.0	1.8	1.2
3,250	60X	a	1.5	1.03x10 ¹⁵	0.07	0.02	b	0.06	0.15	1.5	1.0	1.5	1.2
3,350	60X	a	1.1	5.77x10 ¹⁴	0.07	0.02	b	0.06	0.15	1.1	1.0	1.1	1.2
3,450	60X	a	0.79	3.19x10 ¹⁴	0.07	0.02	b	0.06	0.15	0.79	1.0	0.79	1.2
3,550	60X	a	0.59	1.84x10 ¹⁴	0.07	0.02	b	0.06	0.15	0.59	1.0	0.59	1.2
3,650	60X	a	0.44	1.11x10 ¹⁴	0.07	0.02	b	0.06	0.15	0.44	1.0	0.44	1.2
3,750	60X	a	0.31	6.11x10 ¹³	0.07	0.02	b	0.06	0.15	0.31	1.0	0.31	1.2
3,850	60X	a	0.21	3.41x10 ¹³	0.07	0.02	b	0.06	0.15	0.21	1.0	0.21	1.2
3,950	60X	a	0.16	2.01x10 ¹³	0.07	0.02	b	0.06	0.15	0.16	1.0	0.16	1.2
4,050	60X	a	0.11	1.11x10 ¹³	0.07	0.02	b	0.06	0.15	0.11	1.0	0.11	1.2

2867
64d Film Data Table 1-1, 1977 edition, page 2867.

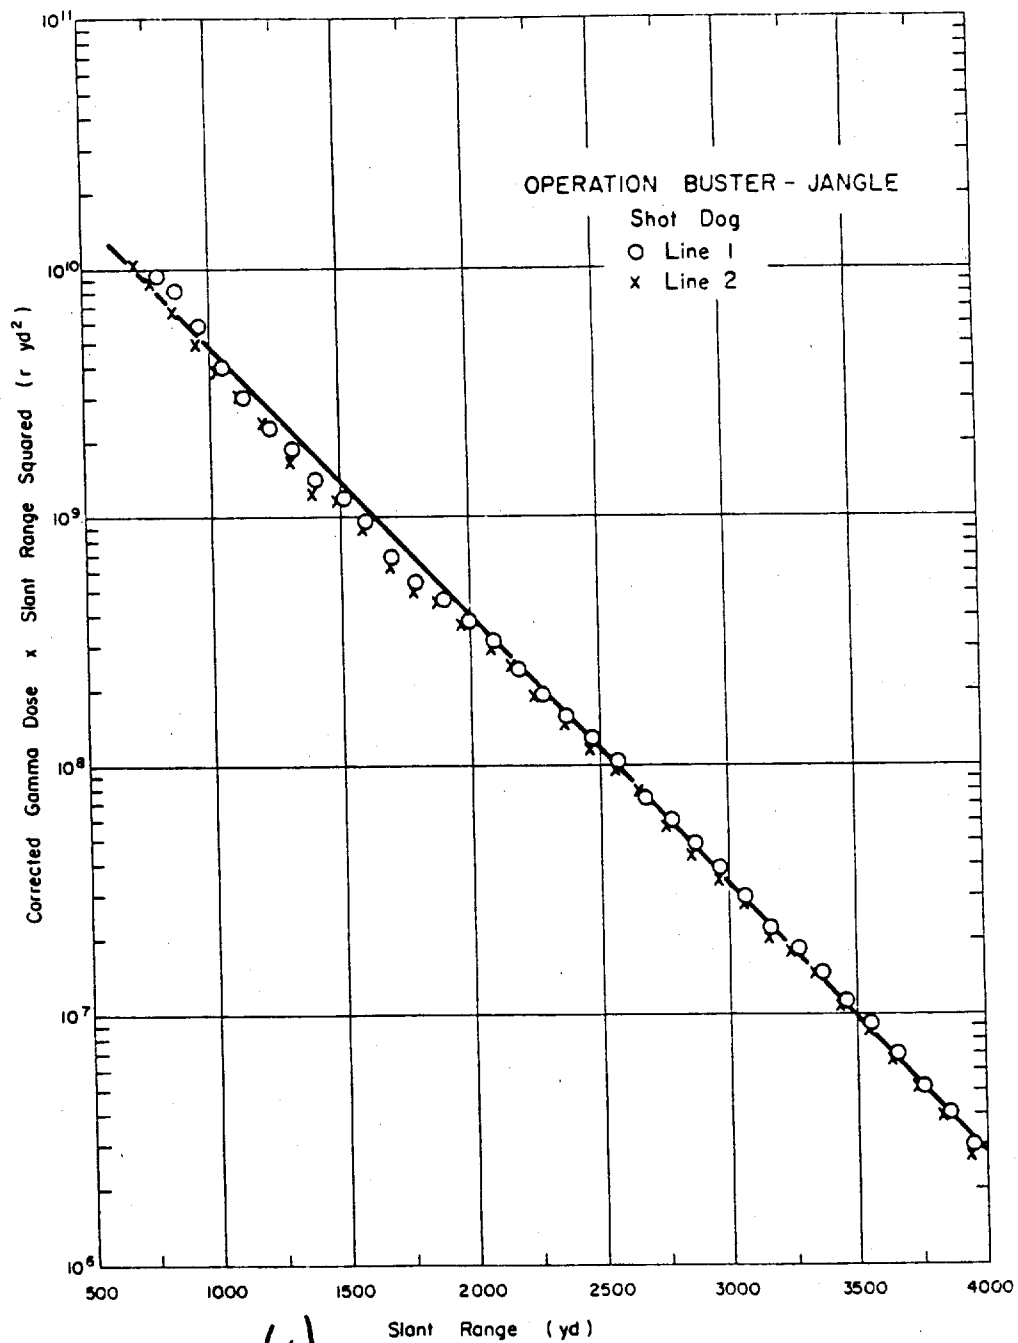


Figure 3.20 (U) Operation Buster-Jangle - Shot Dog -
 Corrected gamma-dose-times-slant-range-
 squared versus slant-range (U).

IS-907 TABLE 1.24 INITIAL GAMMA DOSE - OPERATION BUSTER-JANGLE, SHOT EASY

Line 1


Slant Range	Azi- muth	Film Type	Uncor- rected Gamma Dose	Au Thermal Correction	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contri- bution
yd			r	r		r	r	r		r	r
780	a	548-0	>30,000	320	b	548	3248	>27,000	1.0	>27,000	1120
860	a	548-0	20,000	175	b	298	1783	15,200	1.0	16,200	986
950	a	548-0	12,180	95	b	161	1156	11,020	1.0	11,020	917
1,040	a	548-0	7,310	55	b	94	701	6,610	1.0	6,610	807
1,130	a	548-0	4,780	34	b	59	412	4,370	1.0	4,370	721
1,220	a	548-0	2,780	19	b	33	246	2,450	1.0	2,450	72
1,310	a	548-0	1,740	12	b	19	157	1,600	1.0	1,600	36
1,410	a	1290	1,130	6.4	b	11	34	1,100	1.0	1,100	32
1,510	a	1290	750	3.9	b	6.0	18.4	732	1.0	732	12
1,600	a	1290	490	2.2	b	3.7	11.2	479	1.0	479	7.3
1,700	a	1290	340	1.2	b	2.1	6.3	334	1.0	334	4.2
1,800	a	1290	235	0.82	b	1.2	3.6	231	1.0	231	2.3
1,900	a	606	165	0.46	b	0.69	1.91	163	1.0	163	1.0
2,000	a	606	118	0.26	b	0.39	1.09	104	1.0	104	0.8
2,100	a	606	87	0.15	b	0.22	0.64	86	1.0	86	0.5
2,200	a	606	66	0.08	b	0.12	0.35	66	1.0	66	0.3
2,300	a	606	49	0.05	b	0.07	0.19	49	1.0	49	0.2
2,400	a	606	39	0.03	b	0.04	0.12	39	1.0	39	0.1
2,500	a	510	30	<0.05	b	<0.04	<0.12	23	1.0	23	<1.0
2,600	a	510	24	<0.05	b	<0.04	<0.12	20	1.0	20	<1.0
2,700	a	510	19	<0.05	b	<0.04	<0.12	14	1.0	14	<1.0
2,800	a	510	10	<0.05	b	<0.04	<0.12	10	1.0	10	<1.0
2,900	a	502	6.4	<0.05	b	<0.04	<0.12	6.9	1.0	6.9	<1.0
3,000	a	502	3.4	<0.05	b	<0.04	<0.12	3.6	1.0	3.6	<1.0
3,100	a	502	1.9	<0.05	b	<0.04	<0.12	1.8	1.0	1.8	<1.0
3,200	a	502	1.2	<0.05	b	<0.04	<0.12	1.2	1.0	1.2	<1.0
3,300	a	502	0.7	<0.05	b	<0.04	<0.12	0.7	1.0	0.7	<1.0
3,400	a	502	0.4	<0.05	b	<0.04	<0.12	0.4	1.0	0.4	<1.0
3,500	a	502	0.2	<0.05	b	<0.04	<0.12	0.2	1.0	0.2	<1.0
3,600	a	502	0.1	<0.05	b	<0.04	<0.12	0.1	1.0	0.1	<1.0
3,700	a	502	0.1	<0.05	b	<0.04	<0.12	0.1	1.0	0.1	<1.0
3,800	a	502	0.1	<0.05	b	<0.04	<0.12	0.1	1.0	0.1	<1.0
3,900	a	502	0.1	<0.05	b	<0.04	<0.12	0.1	1.0	0.1	<1.0
4,000	a	502	0.1	<0.05	b	<0.04	<0.12	0.1	1.0	0.1	<1.0

1.25' from column attached to right from above.

(6)
 (Cont) TABLE 5.4 (Continued)
 Line 2

Start Range	Azimuth	Elev. Type	Uncorrected Gamma Dose	Exposure Rate	Atm Thermal Correction	Fast Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Gamma Dose	Soil Contribution
yd			F	n/cm ²	F	F	b	F	F	F	F	F	F
720	a	545-0	>30,000	5.05x10 ⁻²	270	3300	b	973	4893	>10,000	1.0	25,000	1770
860	a	545-0	20,000	1.55x10 ⁻²	176	1650	b	400	1956	10,000	1.0	15,000	645
960	a	545-0	11,300	8.95x10 ⁻³	102	960	b	173	1239	10,000	1.0	10,100	989
1,030	a	545-0	7,150	5.95x10 ⁻³	50	380	b	81	740	7,000	1.0	7,000	284
1,120	a	545-0	5,310	4.05x10 ⁻³	29	340	b	59	438	4,800	1.0	4,800	127
1,220	a	545-0	3,065	2.40x10 ⁻³	19	190	b	33	242	2,700	1.0	2,700	69
1,310	a	545-0	1,695	9.95x10 ⁻⁴	20	18	b	19	57	1,000	1.0	1,000	50
1,400	a	545-0	1,250	3.75x10 ⁻⁴	13	11	b	13	36	1,100	1.0	1,100	25
1,500	a	545-0	760	3.25x10 ⁻⁴	6.9	6.1	b	6.9	12.5	700	1.0	700	11
1,600	a	545-0	510	1.25x10 ⁻⁴	3.9	3.6	b	3.7	11.2	400	1.0	400	7.3
1,700	a	545-0	340	1.15x10 ⁻⁴	2.3	2.1	b	2.4	6.6	330	1.0	330	4.4
1,800	a	545-0	240	6.25x10 ⁻⁵	1.4	0.75	b	1.2	3.35	270	1.0	270	2.3
1,900	a	545-0	170	4.55x10 ⁻⁵	0.81	0.43	b	0.70	1.94	190	1.0	190	1.3
2,000	a	545-0	110	2.17x10 ⁻⁵	0.50	0.28	b	0.41	1.19	100	1.0	100	0.7
2,100	a	545-0	67	1.25x10 ⁻⁵	0.28	0.16	b	0.23	0.67	60	1.0	60	0.4
2,200	a	545-0	64	6.81x10 ⁻⁶	0.16	0.08	b	0.13	0.37	30	1.0	30	0.2
2,300	a	545-0	51	3.05x10 ⁻⁶	0.09	0.04	b	0.07	0.20	30	1.0	30	0.2
2,400	a	545-0	37	1.62x10 ⁻⁶	0.05	0.03	b	0.04	0.10	30	1.0	30	0.2
2,500	a	545-0	27	7.22x10 ⁻⁷	0.03	0.02	b	0.03	0.10	19	1.0	19	0.1
2,600	a	545-0	15	4.02x10 ⁻⁷	0.02	0.01	b	0.03	0.10	15	1.0	15	0.1
2,700	a	545-0	10.9	2.27x10 ⁻⁷	0.02	0.01	b	0.03	0.10	10.9	1.0	10.9	0.1
2,800	a	545-0	7.7	1.27x10 ⁻⁷	0.02	0.01	b	0.03	0.10	7.7	1.0	7.7	0.1
2,900	a	545-0	5.4	7.55x10 ⁻⁸	0.02	0.01	b	0.03	0.10	5.4	1.0	5.4	0.1
3,000	a	545-0	3.4	4.02x10 ⁻⁸	0.02	0.01	b	0.03	0.10	3.4	1.0	3.4	0.1
3,100	a	545-0	3.1	2.39x10 ⁻⁸	0.02	0.01	b	0.03	0.10	3.1	1.0	3.1	0.1
3,200	a	545-0	2.7	1.37x10 ⁻⁸	0.02	0.01	b	0.03	0.10	2.7	1.0	2.7	0.1
3,300	a	545-0	1.7	7.00x10 ⁻⁹	0.02	0.01	b	0.03	0.10	1.7	1.0	1.7	0.1
3,400	a	545-0	1.3	4.15x10 ⁻⁹	0.02	0.01	b	0.03	0.10	1.3	1.0	1.3	0.1
3,500	a	545-0	0.8	2.45x10 ⁻⁹	0.02	0.01	b	0.03	0.10	0.8	1.0	0.8	0.1
3,600	a	545-0	0.5	1.37x10 ⁻⁹	0.02	0.01	b	0.03	0.10	0.5	1.0	0.5	0.1
3,700	a	545-0	0.3	7.70x10 ⁻¹⁰	0.02	0.01	b	0.03	0.10	0.3	1.0	0.3	0.1
3,800	a	545-0	0.2	4.15x10 ⁻¹⁰	0.02	0.01	b	0.03	0.10	0.2	1.0	0.2	0.1
3,900	a	545-0	0.1	2.45x10 ⁻¹⁰	0.02	0.01	b	0.03	0.10	0.1	1.0	0.1	0.1
4,000	a	545-0	0.1	1.37x10 ⁻¹⁰	0.02	0.01	b	0.03	0.10	0.1	1.0	0.1	0.1

Soil Contribution is assumed to be 0.1% of the gamma dose.

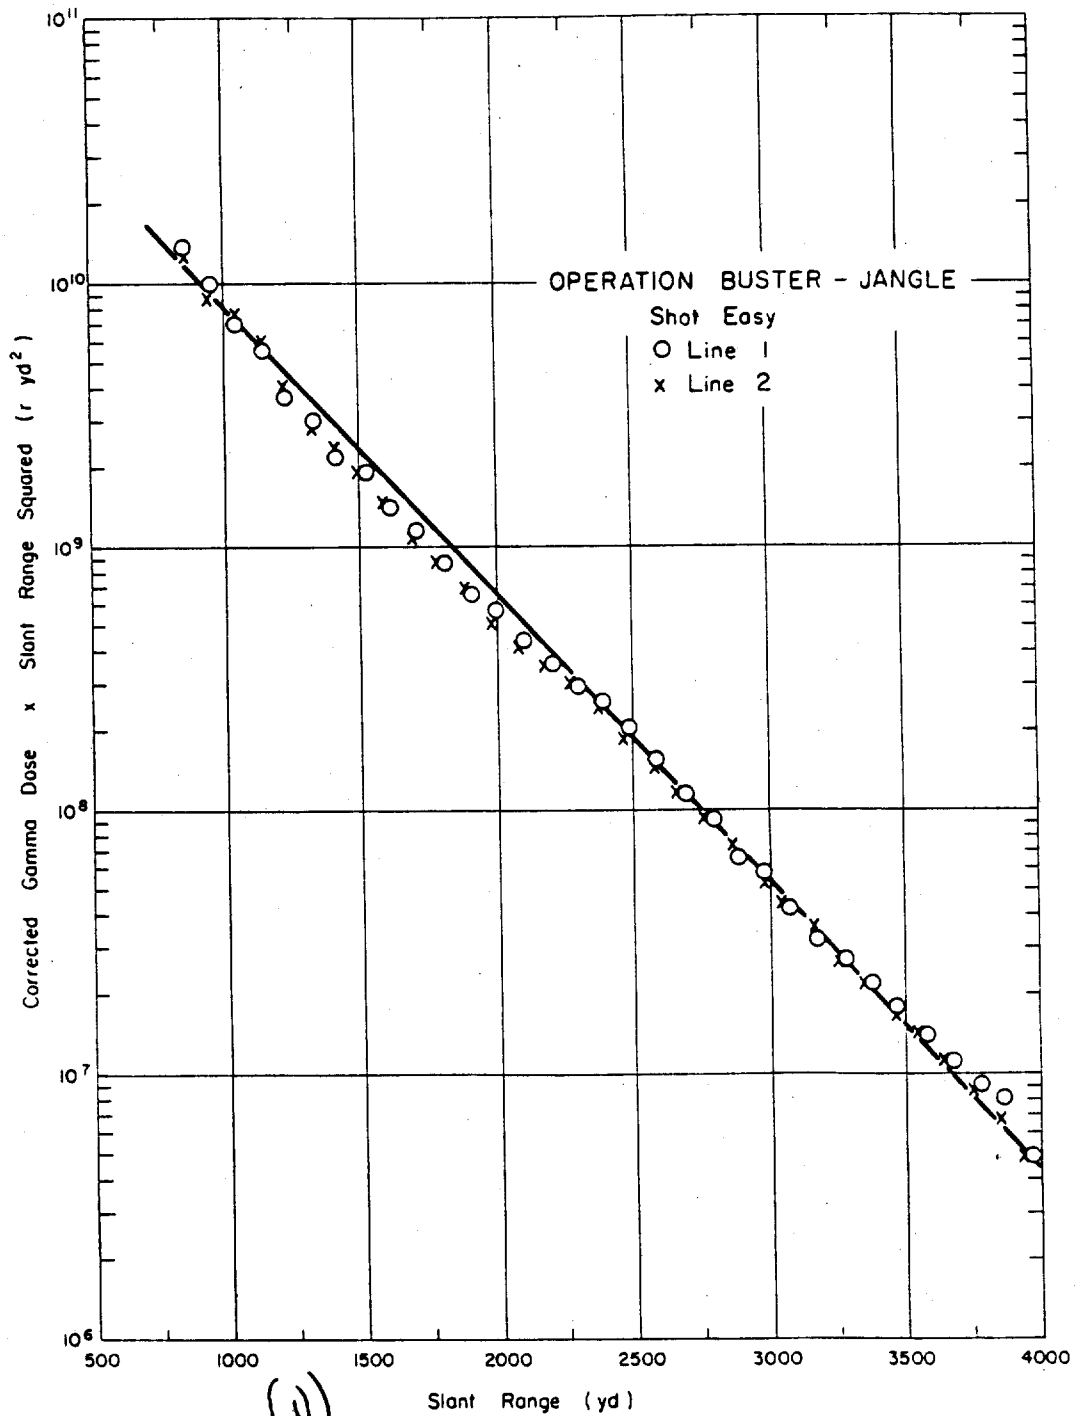

(U)
 Figure 3.21 (S-PD) Operation Buster-Jangle - Shot Easy -
 Corrected gamma-dose-times-slant-range-
 squared versus slant-range (U).

(U)

INITIAL DATA DATA - OPERATIONAL BUSTER-JANGLE,
REFLECT SHOT

Slant Range yd	Azimuth	Film Type	Uncorrected Gamma Loss	Fallout Contri- bution	Shield Type
667	15°	E-548-0	77%	300	b
1,000	15°	D-605	100	50	b
1,333	15°	D-510	25	25	b
2,000	15°	D-510, D-502	5.0	12	b
2,667	15°	D-502	2.5	6.2	b
3,667	15°	D-510	13	25	b
4,667	15°	D-510	12.6	22	b
667	50°	E-548-0	71%	50	b
1,000	50°	D-605	95	5	b
1,333	50°	D-510	18	8	b
2,000	50°	D-502	1	0.5	b
2,667	50°	a	Below Range	a	b
667	90°	E-548-0	71%	50	b
1,000	90°	D-605	90	5	b
1,333	90°	D-510	16.8	2	b
667	165°	E-548-0	65%	50	b
1,333	165°	D-510	15	0	b
2,000	165°	D-502	0.8	0	b
667	200°	E-548-0	65%	0	b
1,333	200°	D-510	15	0	b
2,000	200°	D-502	3.7	0	b
667	335°	E-548-0	2.730	3,700	b
1,000	335°	E-548-0	59%	600	b
1,333	335°	D-605	15%	270	b
2,000	335°	D-502	3.7	18	b
2,667	335°	a	Below Range	a	b

Not reported.
Bills Film Edge.

(U)

INITIAL DATA DATA - OPERATIONAL BUSTER-JANGLE,
UNDERGROUND SHOT

Slant Range yd	Azimuth	Film Type	Uncorrected Gamma Loss	Fallout Contri- bution	Shield Type
667	35°	E-548-0	2,700	500	b
1,000	35°	D-605	160	300	b
1,333	35°	D-605, D-510	50	65	b
2,000	35°	D-605	220	250	b
2,667	35°	D-605	65	50	b
3,667	35°	D-605	70	50	b
667	75°	E-548-0	1,650	1,000	b
1,000	75°	D-605	100	50	b
1,333	75°	D-510	18	15	b
2,000	75°	a	Below Range	a	b
3,000	75°	a	Below Range	a	b
667	240°	E-548-0	1,150	150	b
1,333	240°	a	Below Range	a	b
2,000	240°	a	Below Range	a	b
667	315°	E-548-0	2,000	1,200	b
1,000	315°	D-605	165	100	b
1,333	315°	D-510, D-605	50	60	b
2,000	315°	a	Below Range	a	b
3,000	315°	a	Below Range	a	b
667	335°	E-548-0	4,000	2,700	b
1,000	335°	E-548-0	2,000	2,600	b
1,333	335°	E-548-0	2,000	1,900	b
2,000	335°	E-548-0	600	1,000	b
2,667	335°	D-605	520	400	b
3,667	335°	D-605	55	50	b
4,667	335°	D-605, D-510	20	40	b

Not reported.
Bills Film Edge.

(61) TABLE 3.17 SHOT INFORMATION - OPERATION TUMBLER-SNAPPER

Shot Designation	Date and Time Fired	Location and Type	Height of Burst ft	Yield		HP Thickness cm
				Total kt	Fission kt	
1 (Tumbler I)	1 April 1952 1700:07 GMT	F.F.-Air	793	1.05	1.05	43.97
2 (Tumbler II)	15 April 1952 1729:57 GMT	Area 7-Air	1109	1.17	1.17	43.97
3 (Tumbler III)	22 April 1952 1730:10 GMT	Area 7-Air	3447	30	30	43.97
4 (Tumbler IV or Snapper I)	1 May 1952 1629:59 GMT	Area 7-Air	1040	16.5	~18.3	13.49
5 (Snapper II)	7 May 1952 1214:59 GMT	Area T-1-Tower	300	12.5	12.5	13.17
6 (Snapper III)	25 May 1952 1159:59 GMT	Area 4-Tower	300	11.5	11.5	26.03
7 (Snapper IV)	1 June 1952 1154:59 GMT	Area 3-Tower	300	15.8	15.8	26.03
8 (Snapper V)	5 June 1952 1155:00 GMT	Area 2-Tower	300	13.9	13.9	13.17

* Light Tumbler Weapons.

-(U) TABLE 3.23 PETROLOGICAL DATA - OPERATION TUMBLER-SNAPPER

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	ρ/ρ_s	$(\rho_s/\rho)^2$
2	878	284.6	1.05	0.81	1.53
3	873	291.9	0.99	0.76	1.73
4	877	290.1	1.03	0.79	1.60
5	868	288.8	1.04	0.80	1.56
6	868	286.9	1.05	0.81	1.53
7	872	285.0	1.06	0.82	1.49
8	883	290.8	1.03	0.79	1.60

TABLE 3.1.1. INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SHAPPER, SHOT 3 (TUMBLER II)

Slant Range	Azi-Range	Film Type	Unexposed Gamma Dose	Flux		Final Thermal Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Corrected Gamma Dose	Soil Contribution
				F	n/cm ²								
34													
263	a	545-0	1,035	5.2	4.1	c	b	c	46.2	969	1.0	969	14
602	a	1250	950	7.0	5.1	b	b	c	12.1	925	1.0	925	11
653	a	1250	544	4.1	2.6	b	b	c	6.9	537	1.0	537	5.3
752	a	1250	378	2.0	1.4	b	b	c	3.4	271	1.0	271	3.2
830	a	1250	253	1.5	0.94	b	b	c	2.44	201	1.0	201	1.6
930	a	1250	156	0.75	0.24	b	b	c	0.97	122	1.0	122	1.0
1,030	a	1250	103	0.40	0.14	b	b	c	0.54	102	1.0	102	<1.0
1,130	a	1250	64	0.20	0.09	b	b	c	0.29	54	1.0	54	<1.0
1,230	a	1250	36	0.10	0.03	b	b	c	0.13	36	1.0	36	<1.0
1,330	a	1250	24	0.10	0.03	b	b	c	0.13	24	1.0	24	<1.0
1,425	a	1250	18	0.10	0.03	b	b	c	0.13	18	1.0	18	<1.0
1,517	a	510	10.5	0.10	0.03	b	b	c	0.13	10.5	1.0	10.5	<1.0
1,617	a	510	6.9	0.10	0.03	b	b	c	0.13	6.9	1.0	6.9	<1.0
1,717	a	510	4.7	0.10	0.03	b	b	c	0.13	4.7	1.0	4.7	<1.0
1,812	a	505	3.4	0.10	0.03	b	b	c	0.13	3.4	1.0	3.4	<1.0
1,905	a	505	2.4	0.10	0.03	b	b	c	0.13	2.4	1.0	2.4	<1.0
2,007	a	505	1.6	0.10	0.03	b	b	c	0.13	1.6	1.0	1.6	<1.0

Unknown.
BES film holders attached to aluminum stubs.
Negligible.

TABLE 3.1.2. INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SHAPPER, SHOT 3 (TUMBLER III)

Slant Range	Azi-Range	Film Type	Unexposed Gamma Dose	Flux		Final Thermal Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Corrected Gamma Dose	Soil Contribution
				F	n/cm ²								
34													
1,170	a	545-0	2,700	7.6	72	c	b	c	79.6	2,620	1.0	2,620	26
1,195	a	545-0	2,400	6.5	62	c	b	c	68.5	2,330	1.0	2,330	23
1,210	a	545-0	2,350	6.0	59	c	b	c	65.0	2,290	1.0	2,290	21
1,240	a	545-0	2,000	5.4	52	c	b	c	57.4	2,140	1.0	2,140	18
1,270	a	545-0	1,950	4.8	48	c	b	c	52.8	1,900	1.0	1,900	17
1,290	a	545-0	1,850	4.3	41	c	b	c	45.3	1,790	1.0	1,790	16
1,300	a	545-0	1,750	3.9	41	c	b	c	44.9	1,710	1.0	1,710	15
1,320	a	545-0	1,650	3.2	37	c	b	c	39.5	1,570	1.0	1,570	16
1,340	a	545-0	1,450	2.2	27	c	b	c	30.8	1,400	1.0	1,400	14
1,360	a	545-0	1,115	1.8	19	c	b	c	20.8	1,100	1.0	1,100	11
1,380	a	545-0	815	1.4	14	c	b	c	14.6	800	1.0	800	8
1,400	a	545-0	700	1.1	12	c	b	c	11.3	687	1.0	687	6.8
1,420	a	545-0	570	0.90	0.89	b	b	c	10.9	560	1.0	560	5.6
1,440	a	545-0	462	0.80	0.80	b	b	c	9.90	462	1.0	462	4.6
1,460	a	545-0	350	0.60	0.60	b	b	c	8.62	350	1.0	350	3.5
1,480	a	545-0	250	0.40	0.40	b	b	c	6.42	250	1.0	250	2.5
1,500	a	545-0	160	0.30	0.30	b	b	c	4.24	160	1.0	160	1.6
1,520	a	545-0	107	0.20	0.20	b	b	c	3.04	107	1.0	107	1.0
1,540	a	545-0	73	0.10	0.10	b	b	c	2.06	73	1.0	73	0.7
1,560	a	545-0	59	0.08	0.08	b	b	c	1.64	59	1.0	59	0.6
1,580	a	545-0	45	0.06	0.06	b	b	c	1.24	45	1.0	45	0.4
1,600	a	545-0	33	0.04	0.04	b	b	c	0.90	33	1.0	33	0.3
1,620	a	545-0	23	0.03	0.03	b	b	c	0.64	23	1.0	23	0.2
1,640	a	545-0	17	0.02	0.02	b	b	c	0.46	17	1.0	17	0.1

Unknown.
BES film holders attached to aluminum stubs.
Negligible.

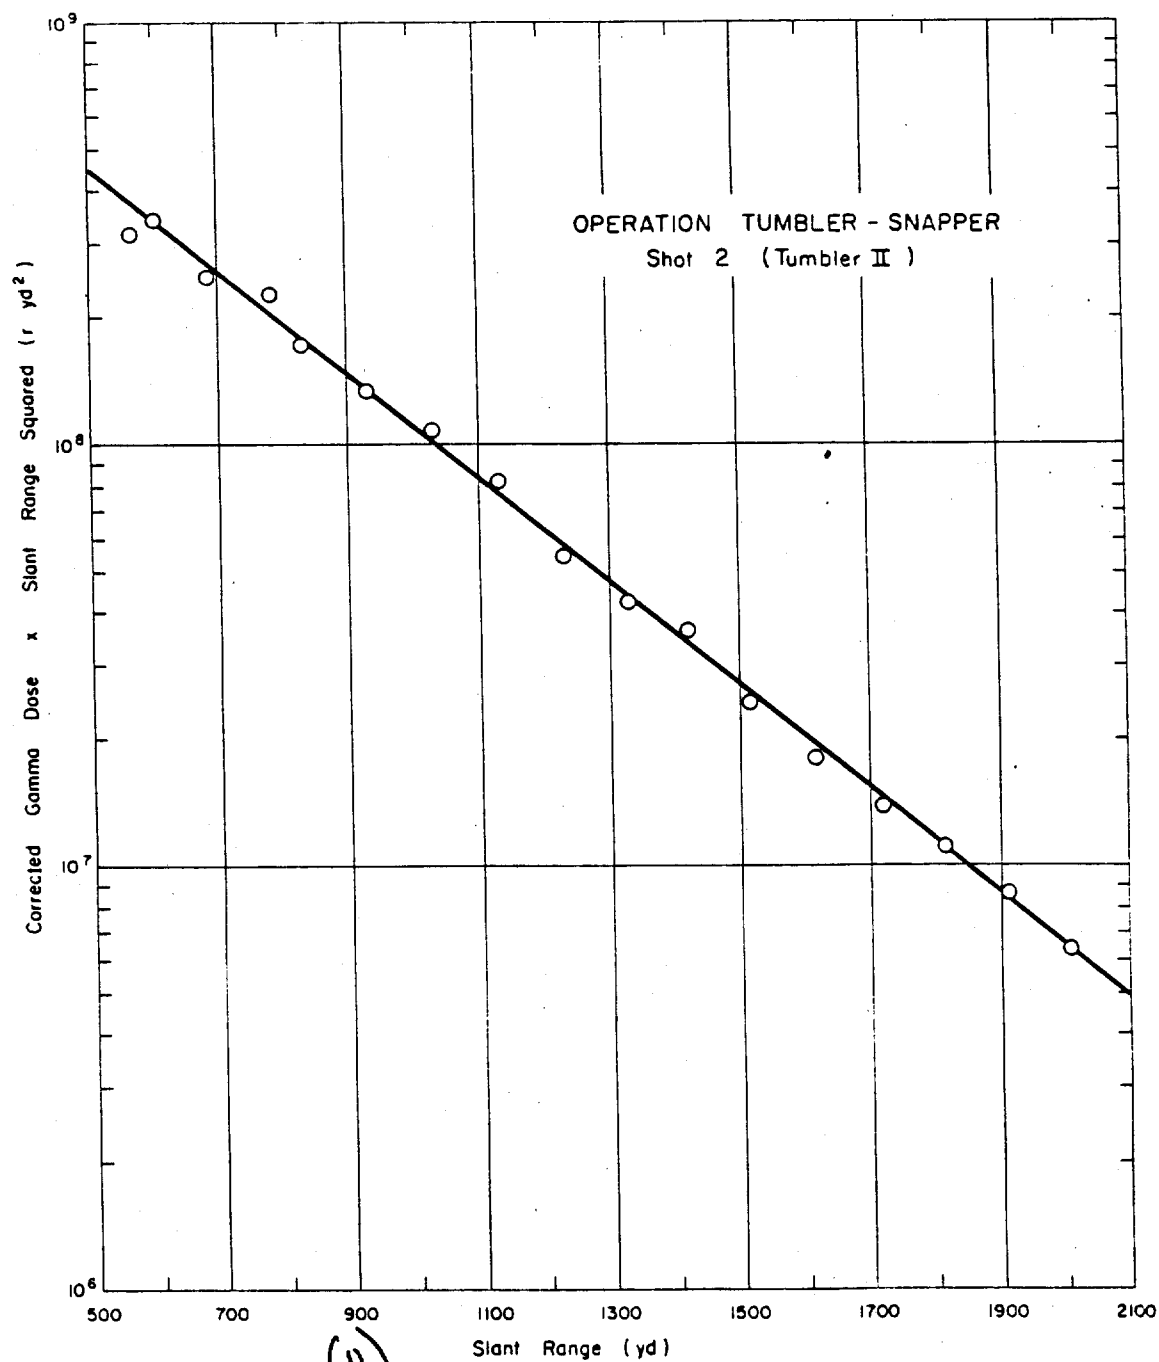


Figure 3.22 (S-~~RD~~) Operation Tumbler-Snapper - Shot 2 (Tumbler II) - SCEL corrected gamma-dose-times-slant-range-squared versus slant-range (U).

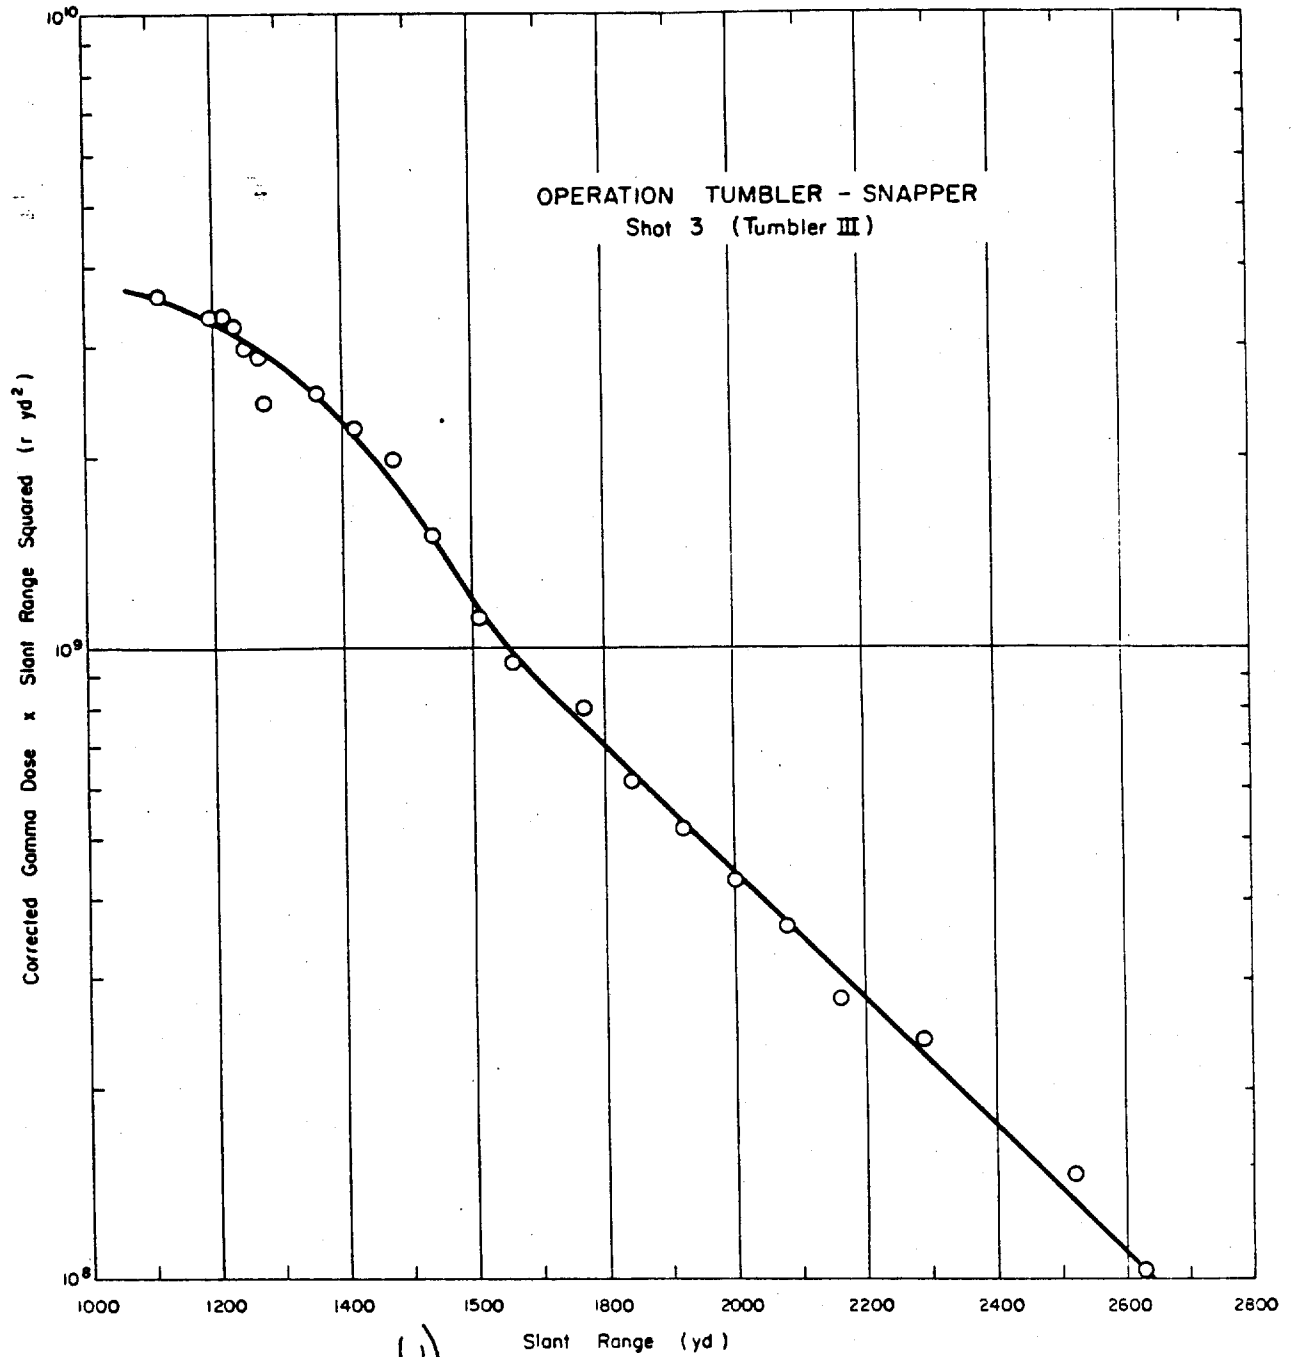


Figure 3.23 (U) ~~(S-RD)~~ Operation Tumbler-Snapper - Shot 3
(Tumbler III) - SCEL Corrected
gamma-dose-times-slant-range-squared
versus slant-range (U).

(U) TABLE 3.31 SEEL INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SHAPERS, SHOT 4 (CHAPTER 1)


Slant Range yd	Azi- muth	Film Type	Neutron Flux		Thermal Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
			Un- cor- rected Gamma Dose	Au n/cm ²								
1,130	a	548-0	2,200	2.69x10 ¹¹	r	c	c	233	1,970	1.0	1,970	80
1,210	a	548-0	1,550	1.65x10 ¹¹	r	c	c	147	1,200	1.0	1,200	49
1,300	a	1290	900	9.32x10 ¹⁰	r	b	c	39	861	1.0	861	39
1,395	a	1290	580	4.99x10 ¹⁰	r	b	c	17.2	563	1.0	563	16
1,490	a	1290	435	2.77x10 ¹⁰	r	b	c	10.0	425	1.0	425	9.1
1,590	a	1290	316	1.62x10 ¹⁰	r	b	c	5.5	310	1.0	310	4.6
1,690	a	1290	226	7.05x10 ⁹	r	b	c	3.0	223	1.0	223	2.3
1,785	a	606	150	4.22x10 ⁹	r	b	c	1.5	148	1.0	148	1.9
1,885	a	606	110	2.25x10 ⁹	r	b	c	0.83	109	1.0	109	1.0
1,980	a	606	75	1.23x10 ⁹	r	b	c	0.47	74	1.0	74	0.7
2,025	a	606	52	9.22x10 ⁸	r	b	c	0.35	52	1.0	52	0.5
2,170	a	606	38	5.51x10 ⁸	r	b	c	0.18	38	1.0	38	0.3
2,260	a	606	28	1.79x10 ⁸	r	b	c	0.04	28	1.0	28	0.2
2,370	a	606	19	9.79x10 ⁷	r	b	c	0.04	19	1.0	19	0.1
2,470	a	510	13	5.38x10 ⁷	r	b	c	<0.02	13	1.0	13	0.1
2,580	a	510	10	2.65x10 ⁷	r	b	c	<0.02	10	1.0	10	0.1
2,680	a	510	7.5	1.39x10 ⁷	r	b	c	<0.02	7.5	1.0	7.5	0.1
2,790	a	510	5.0	6.51x10 ⁶	r	b	c	<0.02	5.0	1.0	5.0	0.1
2,870	a	508	3.5	4.17x10 ⁶	r	b	c	<0.02	3.5	1.0	3.5	0.1
2,970	a	508	5.0	2.71x10 ⁶	r	b	c	<0.02	5.0	1.0	5.0	0.1

Unknown.
BHE film holders attached to aluminum stakes.
Negligible.


(U) TABLE 3.32 SEEL INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SHAPERS, SHOT 5 (CHAPTER 1)

Slant Range yd	Azi- muth	Film Type	Neutron Flux		Thermal Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
			Un- cor- rected Gamma Dose	Au n/cm ²								
1,200	a	548-0	1,580	9.24x10 ¹⁰	r	c	c	101	1,480	1.0	1,480	26
1,300	a	1290	990	4.62x10 ¹⁰	r	b	c	17.8	932	1.0	932	14
1,400	a	1290	560	2.50x10 ¹⁰	r	b	c	9.7	550	1.0	550	7.7
1,500	a	1290	369	1.36x10 ¹⁰	r	b	c	5.2	394	1.0	394	3.6
1,600	a	1290	272	7.03x10 ⁹	r	b	c	2.7	269	1.0	269	1.3
1,700	a	1290	174	3.09x10 ⁹	r	b	c	1.51	172	1.0	172	0.8
1,800	a	606	116	2.04x10 ⁹	r	b	c	0.74	115	1.0	115	0.5
1,900	a	606	75	1.10x10 ⁹	r	b	c	0.44	75	1.0	75	0.3
2,000	a	606	52	5.76x10 ⁸	r	b	c	0.21	52	1.0	52	0.2
2,100	a	606	36	3.09x10 ⁸	r	b	c	0.11	36	1.0	36	0.1
2,200	a	606	24	1.62x10 ⁸	r	b	c	0.11	24	1.0	24	0.1
2,300	a	510	17	8.16x10 ⁷	r	b	c	0.11	17	1.0	17	0.1
2,400	a	510	9.0	2.40x10 ⁷	r	b	c	0.11	9.0	1.0	9.0	0.1
2,500	a	510	6.5	1.25x10 ⁷	r	b	c	0.11	6.5	1.0	6.5	0.1
2,600	a	510	4.3	6.46x10 ⁶	r	b	c	0.11	4.3	1.0	4.3	0.1
2,700	a	508	3.0	4.04x10 ⁶	r	b	c	0.11	3.0	1.0	3.0	0.1
2,800	a	508	2.5	1.95x10 ⁶	r	b	c	0.11	2.5	1.0	2.5	0.1
2,900	a	508	2.0	9.03x10 ⁵	r	b	c	0.11	2.0	1.0	2.0	0.1

Unknown.
BHE film holders attached to aluminum
stakes.

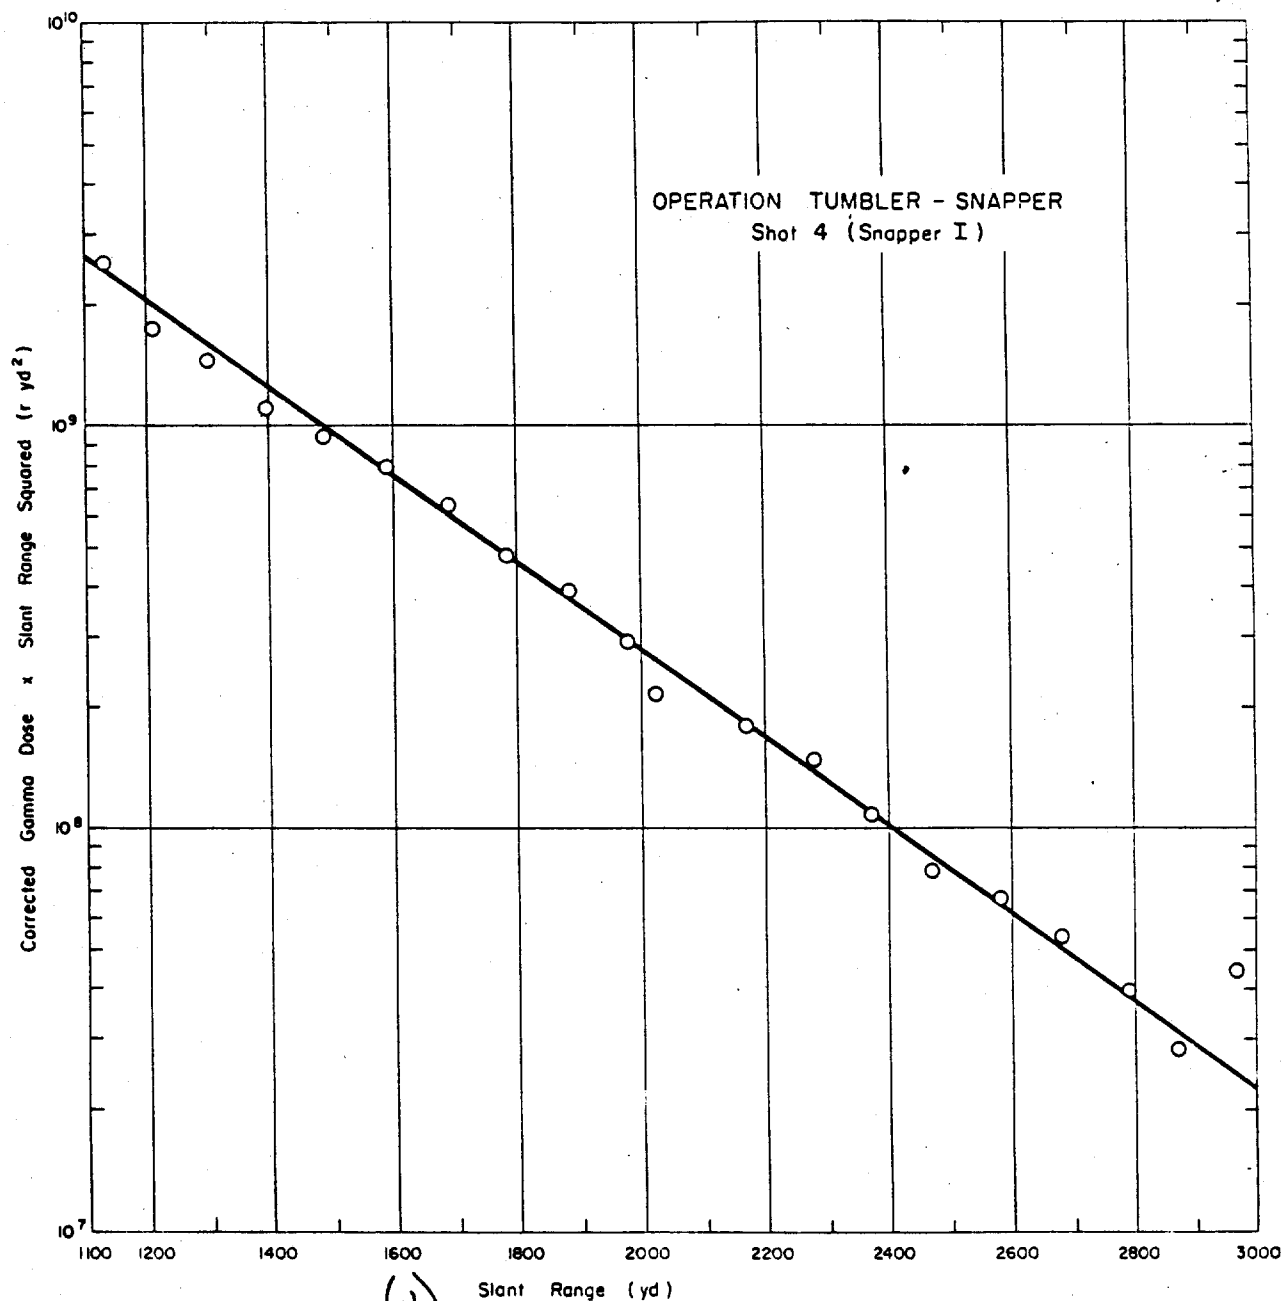

(U)
Figure 3.24 (S-RD) Operation Tumbler-Snapper - Shot 4
(Snapper I) - SCEL corrected gamma-
dose-times-slant-range-squared versus
slant-range (U).

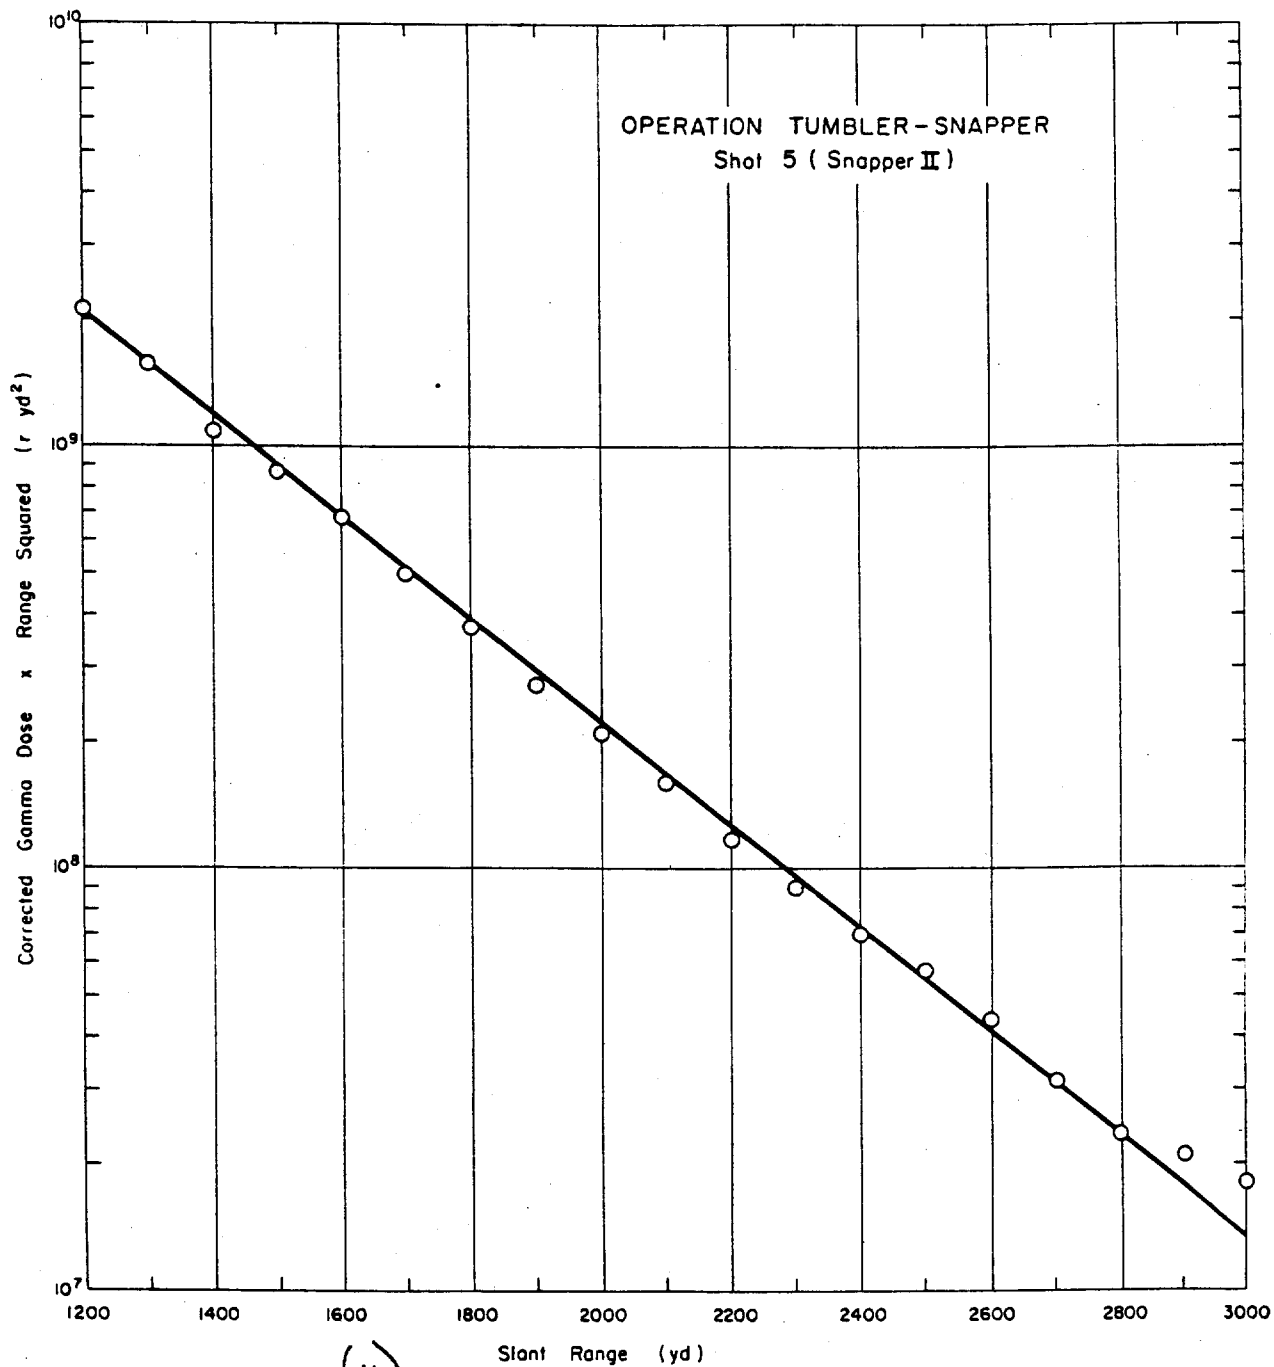

(U)
Figure 3.25 (S-AD) Operation Tumbler-Snapper - Shot 5
(Snapper II) - SCEL Corrected gamma-dose-
times-slant-range-squared versus slant-range (U).

(U) TABLE 3.33 SEEL INITIAL GARGA PILE DATA - OPERATION TUBLER-SNAPPER, SHOT 6 (SNAPPER III)

Slant Range	Azi- muth	Film Type	Neutron Flux		Un- corrected Gamma Dose	F	Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
			yd	Au n/cm ²											
1,165	a	1290	1,000	6.19x10 ⁸	1,000	13	6.7	10	b	c	23	977	1.0	977	13
1,265	a	1290	715	3.7x10 ⁸	443	1.5	3.5	3.0	b	c	12.2	703	1.0	703	8.1
1,365	a	1290	284	1.71x10 ⁸	100	1.8	1.6	1.6	b	c	6.5	436	1.0	436	3.8
1,465	a	1290	100	8.96x10 ⁷	38	1.1	0.87	0.87	b	c	3.4	241	1.0	241	2.1
1,565	a	606	98	4.7x10 ⁷	38	0.88	0.31	0.31	b	c	1.67	128	1.0	128	1.1
1,665	a	606	98	3.8x10 ⁷	38	0.30	0.17	0.17	b	c	0.47	67	1.0	67	<1.1
1,765	a	606	43	6.9x10 ⁶	43	0.16	0.09	0.09	b	c	0.25	43	1.0	43	<1.1
1,865	a	606	30	3.6x10 ⁶	21	0.08	0.05	0.05	b	c	0.13	30	1.0	30	<1.1
2,065	a	606	21	1.5x10 ⁶	16	0.04	0.03	0.03	b	c	0.07	21	1.0	21	<1.1
2,265	a	606	16	9.7x10 ⁵	12	0.02	0.02	0.02	b	c	0.04	16	1.0	16	<1.1
2,365	a	510	12	5.1x10 ⁵	9.0	<0.02	<0.02	<0.02	b	c	<0.04	12	1.0	12	<1.1
2,465	a	510	6.0	2.6x10 ⁵	6.0	<0.02	<0.02	<0.02	b	c	<0.04	6.0	1.0	6.0	<1.1
2,565	a	510	4.3	1.39x10 ⁵	4.3	<0.02	<0.02	<0.02	b	c	<0.04	4.3	1.0	4.3	<1.1
2,665	a	508	3.0	5.8x10 ⁴	3.0	<0.02	<0.02	<0.02	b	c	<0.04	3.0	1.0	3.0	<1.1

Unknown.
BMS film holders attached to aluminum stakes.
Negligible.

(U) TABLE 3.34 SEEL INITIAL GARGA PILE DATA - OPERATION TUBLER-SNAPPER, SHOT 7 (SNAPPER IV)

Slant Range	Azi- muth	Film Type	Neutron Flux		Un- corrected Gamma Dose	F	Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
			yd	Au n/cm ²											
1,200	a	1290	950	1.2x10 ⁸	720	2.6	2.4	2.4	b	c	5.0	945	1.0	945	3.1
1,300	a	1290	720	6.3x10 ⁷	520	1.3	1.2	1.2	b	c	2.5	717	1.0	717	2.0
1,400	a	1290	520	3.1x10 ⁷	330	0.65	0.62	0.62	b	c	1.37	519	1.0	519	1.0
1,500	a	1290	330	1.5x10 ⁷	179	0.32	0.39	0.39	b	c	0.71	329	1.0	329	0.4
1,600	a	606	179	8.6x10 ⁶	127	0.16	0.12	0.12	b	c	0.38	179	1.0	179	<0.4
1,700	a	606	127	4.6x10 ⁶	85	0.09	0.07	0.07	b	c	0.19	127	1.0	127	<0.4
1,800	a	606	85	2.4x10 ⁶	54	0.05	0.04	0.04	b	c	0.09	85	1.0	85	<0.4
1,900	a	606	54	1.6x10 ⁶	46	0.02	0.03	0.03	b	c	0.04	54	1.0	54	<0.4
2,000	a	606	46	4.9x10 ⁵	30	0.01	0.01	0.01	b	c	0.02	30	1.0	30	<0.4
2,100	a	606	30	2.0x10 ⁵	20	0.01	0.01	0.01	b	c	0.01	20	1.0	20	<0.4
2,200	a	606	20	1.2x10 ⁵	12	<0.01	<0.01	<0.01	b	c	<0.02	12	1.0	12	<0.4
2,300	a	606	12	6.1x10 ⁴	9	<0.01	<0.01	<0.01	b	c	<0.02	9	1.0	9	<0.4
2,400	a	606	9	3.4x10 ⁴	5.8	<0.01	<0.01	<0.01	b	c	<0.02	5.8	1.0	5.8	<0.4
2,500	a	606	4.5	7.6x10 ³	4.5	<0.01	<0.01	<0.01	b	c	<0.02	4.5	1.0	4.5	<0.4
2,600	a	606	3.3	4.7x10 ³	3.3	<0.01	<0.01	<0.01	b	c	<0.02	3.3	1.0	3.3	<0.4
2,700	a	606	2.5	2.7x10 ³	2.5	<0.01	<0.01	<0.01	b	c	<0.02	2.5	1.0	2.5	<0.4
2,800	a	606	1.9	9.5x10 ²	1.9	<0.01	<0.01	<0.01	b	c	<0.02	1.9	1.0	1.9	<0.4
2,900	a	606	1.5	4.7x10 ²	1.5	<0.01	<0.01	<0.01	b	c	<0.02	1.5	1.0	1.5	<0.4

Unknown.
BMS film holders attached to aluminum stakes.
Negligible.

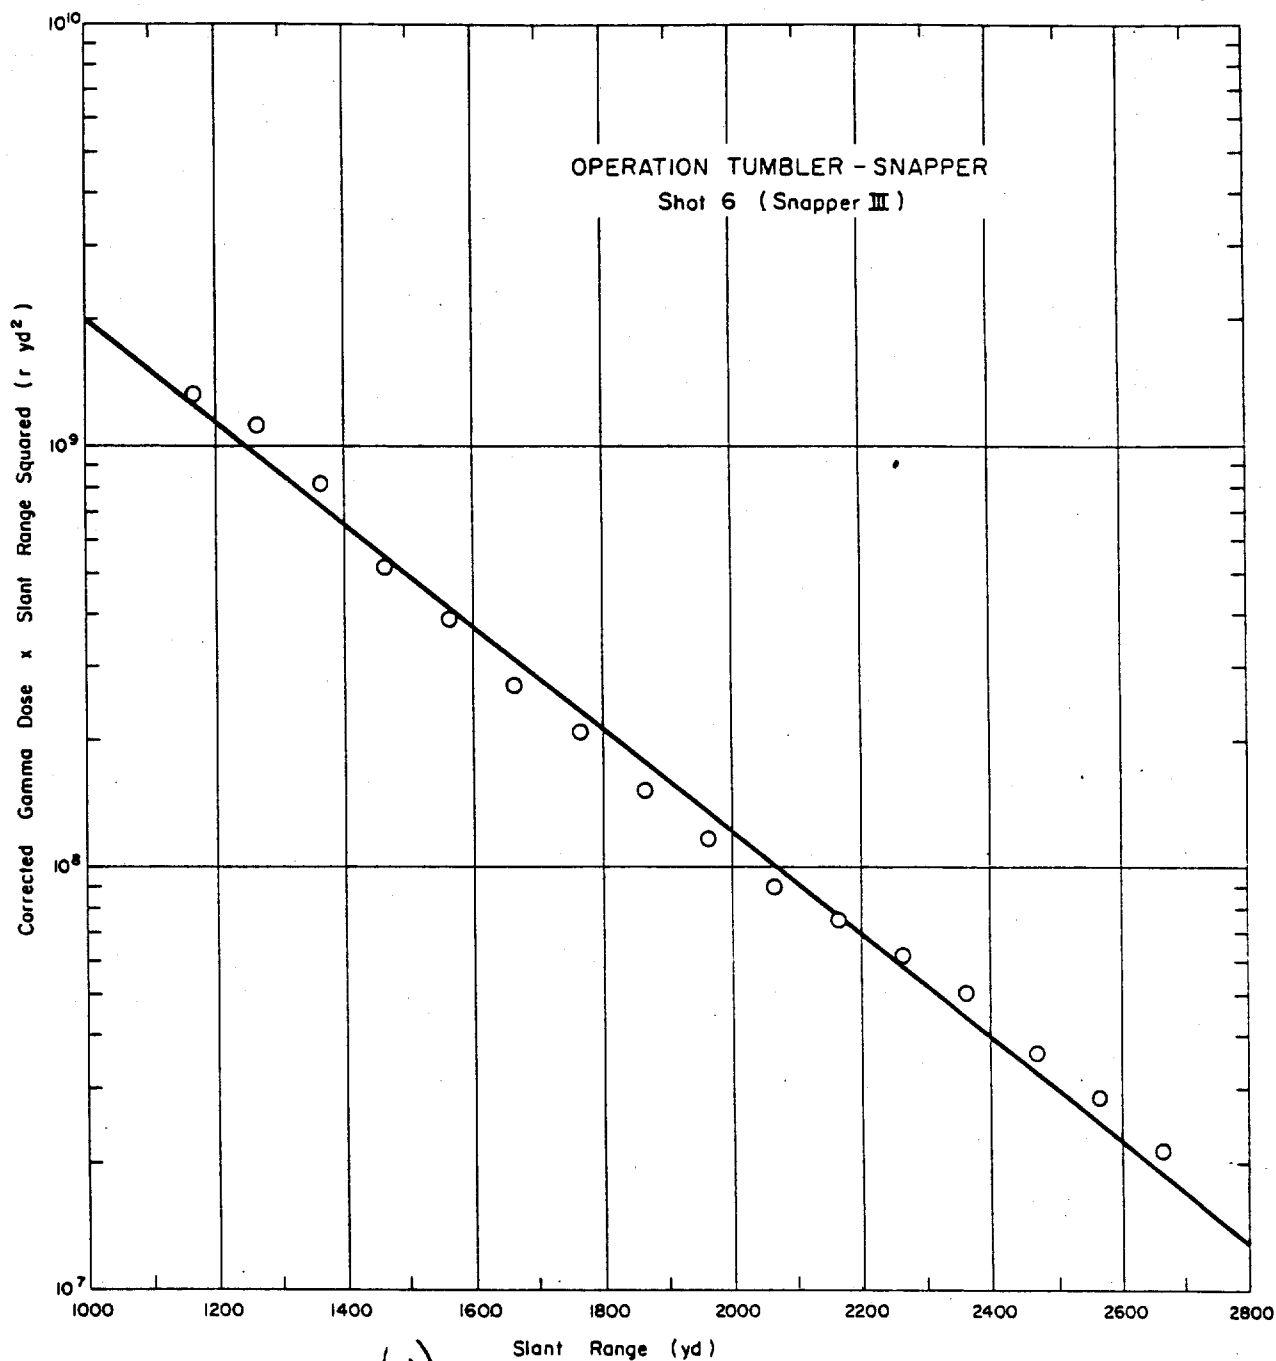


Figure 3.26 (U) - Operation Tumbler-Snapper - Shot 6
(Snapper III) - SCEL Corrected gamma-dose-
times-slant-range-squared versus slant-range (U).


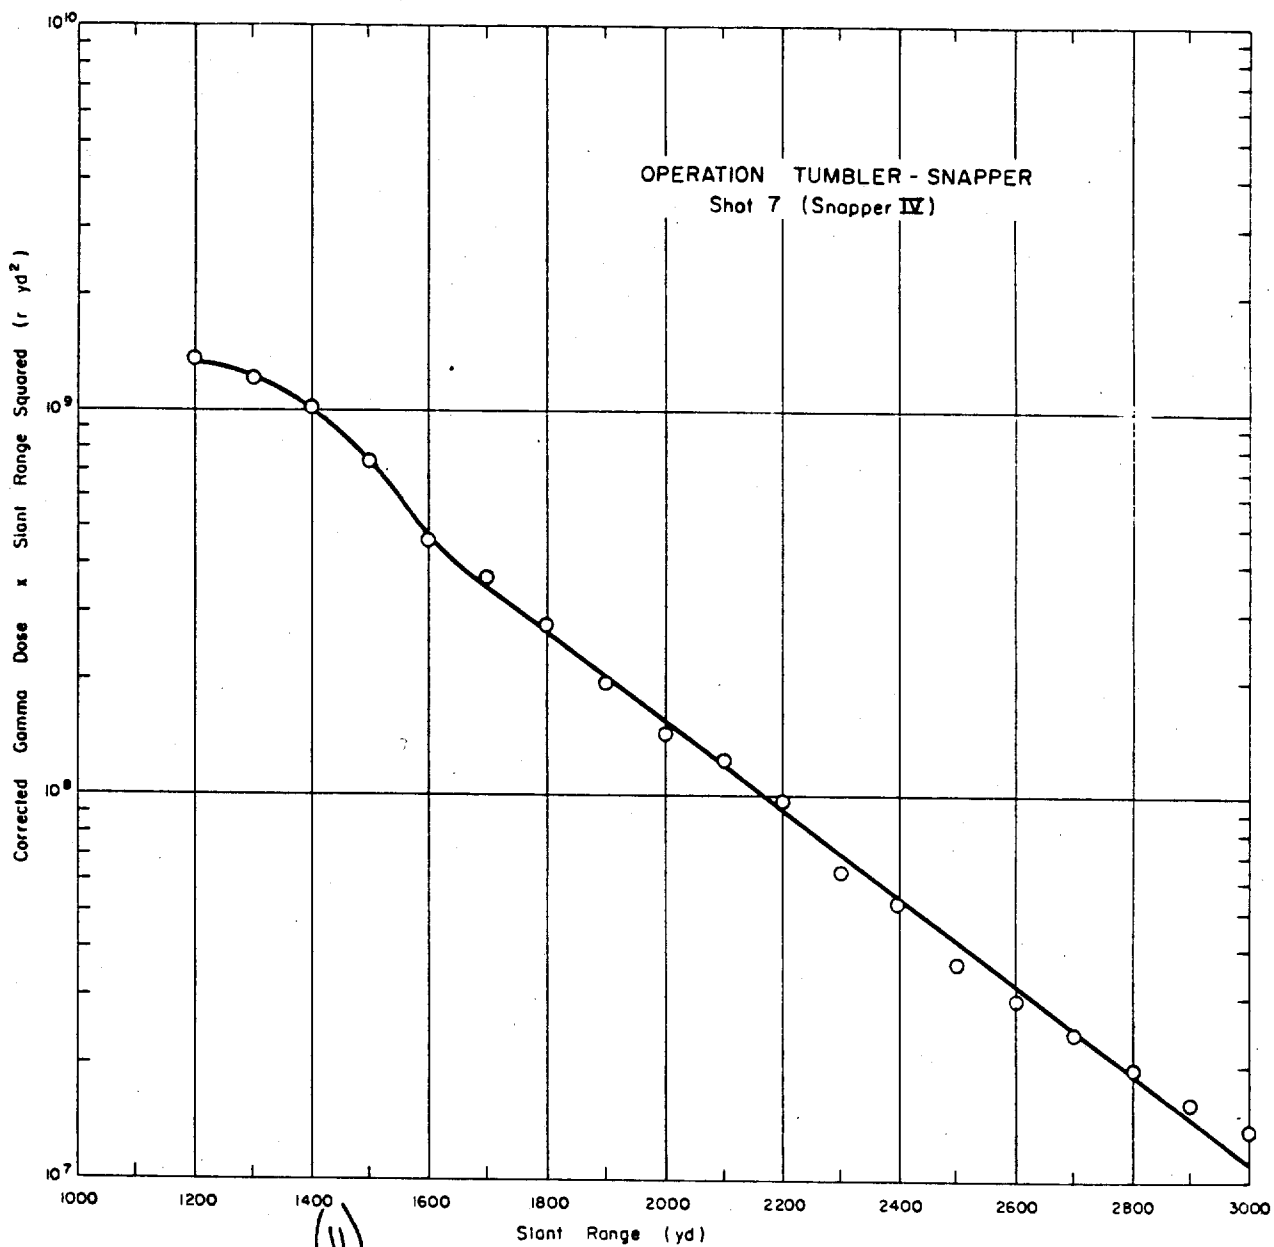


Figure 3.27 (U) Operation Tumbler-Snapper - Shot 7
(Snapper IV) - SCEL Corrected gamma-dose-
times-slant-range-squared versus slant-range (U).

(C) (S-107) TABLE 3.35 BEEL INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SNAPPER, SHOT 8 (SNAPPER V)

Slant Range	Azi- muth	Film Type	Uncor- rected Gamma Dose		Neutron Flux		At- mospheric Thermal Correc- tion		Shield Type	Shield Correc- tion		Total Correc- tion	Cor- rected Gamma Dose		Atten- uation Factor	Final Gamma Dose	Soil Contribution
			F	R	Au	n/cm ²	F	R		F	R		F	R			
1,200	a	548-0	1,500	1.75x10 ⁹			2.0	10	0.89	b	c	12.0	1,490	872	1.0	1,490	3.4
1,300	a	1290	575	9.49x10 ⁸			1.9	0.49	b	b	c	2.79	872	1.0	872	1.6	
1,400	a	1290	575	5.23x10 ⁸			1.1	0.49	b	b	c	1.59	573	1.0	573	0.8	
1,500	a	1290	400	2.92x10 ⁸			0.60	0.26	b	b	c	0.86	399	1.0	399	<0.8	
1,600	a	1290	255	1.61x10 ⁸			0.34	0.15	b	b	c	0.49	254	1.0	254	<0.8	
1,700	a	606	126	8.98x10 ⁷			0.20	0.05	b	b	c	0.25	126	1.0	126	<0.8	
1,800	a	606	102	4.96x10 ⁷			0.11	0.03	b	b	c	0.14	102	1.0	102	<0.8	
1,900	a	606	67	2.63x10 ⁷			0.06	0.02	b	b	c	0.08	67	1.0	67	<0.8	
2,000	a	606	47	1.50x10 ⁷			0.03	0.01	b	b	c	0.04	47	1.0	47	<0.8	
2,100	a	606	34	8.18x10 ⁶			<0.03	<0.01	b	b	c	<0.04	34	1.0	34	<0.8	
2,200	a	606	23	4.45x10 ⁶			<0.03	<0.01	b	b	c	<0.04	23	1.0	23	<0.8	
2,300	a	606	17	2.44x10 ⁶			<0.03	<0.01	b	b	c	<0.04	17	1.0	17	<0.8	
2,400	a	510	12.5	1.34x10 ⁶			<0.03	<0.01	b	b	c	<0.04	12.5	1.0	12.5	<0.8	
2,500	a	510	9.5	7.45x10 ⁵			<0.03	<0.01	b	b	c	<0.04	9.5	1.0	9.5	<0.8	
2,600	a	510	6.5	4.06x10 ⁵			<0.03	<0.01	b	b	c	<0.04	6.5	1.0	6.5	<0.8	
2,700	a	510	4.8	2.26x10 ⁵			<0.03	<0.01	b	b	c	<0.04	4.8	1.0	4.8	<0.8	
2,800	a	503	3.6	1.29x10 ⁵			<0.03	<0.01	b	b	c	<0.04	3.6	1.0	3.6	<0.8	
2,900	a	503	2.7	6.85x10 ⁴			<0.03	<0.01	b	b	c	<0.04	2.7	1.0	2.7	<0.8	
3,000	a	503	2.0	3.7x10 ⁴			<0.03	<0.01	b	b	c	<0.04	2.0	1.0	2.0	<0.8	

Unknown.
BBS film holders attached to aluminum stakes,
negligible.

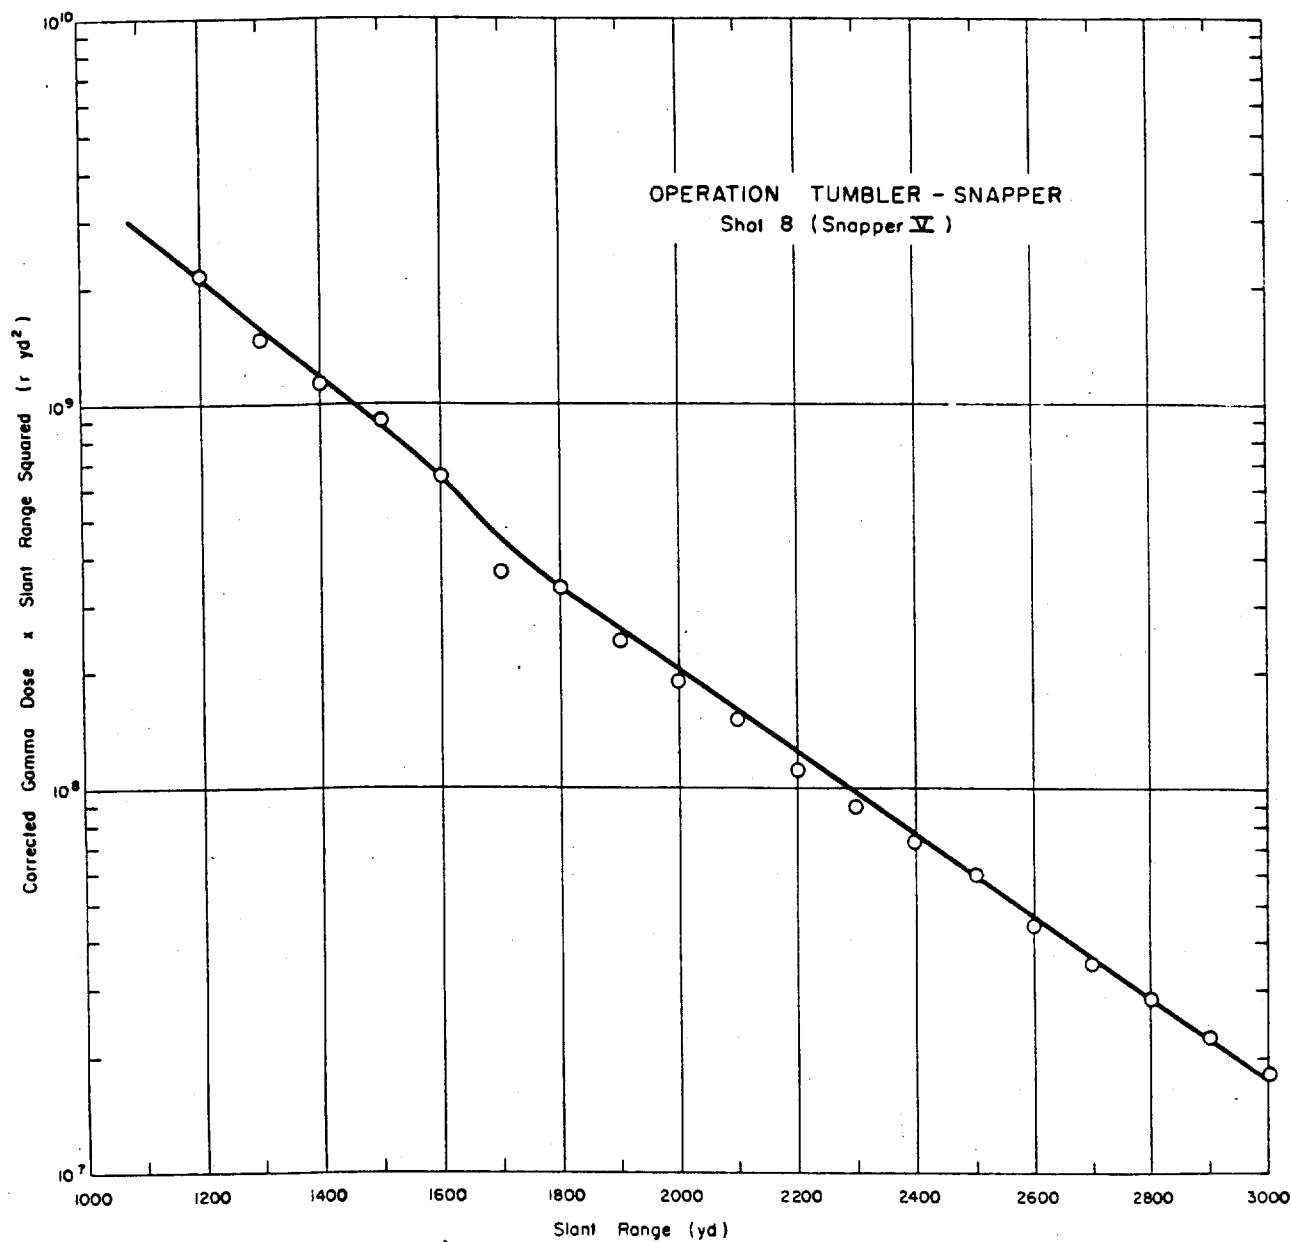

(U)
Figure 3.28 (S-RD) Operation Tumbler-Snapper - Shot 8
(Snapper V) - SCEL Corrected gamma-dose-
times-slant-range-squared versus slant-
range (U).

(u)

TABLE 3.30 LAST INITIAL GAMMA DOSE DATA - OPERATION
TUMBLER-SMARTER, SHOT 2 (TUMBLER II)

Slant Range	Azi- muth	Film Type	Uncor- rected Gamma Dose		Neutron Flux		Shield Type
			r	Au	n/cm ²	Au	
yd							
590	a	548-0	1,480		3.74x10 ⁶		b
750	a	Adlux	550		1.23x10 ⁶		b
930	a	606	245		3.51x10 ⁶		b
1,120	a	606	100		9.48x10 ⁶		b
1,310	a	606	46		2.57x10 ⁶		b
1,400	a	510 and 606	30		1.38x10 ⁶		b
1,500	a	510 and 606	21		7.02x10 ⁶		b
1,600	a	510 and 606	14.4		3.51x10 ⁶		b
1,600	a	510 and 606	14.8		3.51x10 ⁶		b
1,690	a	510 and 606	10.4		1.87x10 ⁶		b
1,790	a	510 and 502	7.3		9.36x10 ⁶		b
1,790	a	510 and 502	7.8		9.36x10 ⁶		b
1,890	a	510 and 502	4.8		4.68x10 ⁶		b
1,890	a	510 and 502	5.1		4.68x10 ⁶		b
1,990	a	510 and 502	3.5		2.32x10 ⁶		b
1,990	a	510 and 502	3.5		2.32x10 ⁶		b
2,090	a	502	2.5		1.16x10 ⁶		b
2,180	a	502	1.5		6.14x10 ⁶		b
2,280	a	502	1.5		3.08x10 ⁶		b
2,380	a	502	0.87		1.54x10 ⁶		b
2,480	a	502	0.5		7.66x10 ⁶		b
2,580	a	502	0.45		3.83x10 ⁶		b
2,680	a	502	0.33		1.91x10 ⁶		b
2,780	a	502	0.3		<1x10 ⁶		b
2,880	a	502	0.15		<1x10 ⁶		b
2,980	a	502	0.16		<1x10 ⁶		b
3,070	a	502	0.10		<1x10 ⁶		b

Unknown.

b/w film holders attached to angle-lion stave.

(u)

TABLE 3.37 LAST INITIAL GAMMA DOSE DATA - OPERATION
TUMBLER-SMARTER, SHOT 3 (TUMBLER III)

Slant Range	Azi- muth	Film Type	Uncor- rected Gamma Dose		Neutron Flux		Shield Type
			r	Au	n/cm ²	Au	
yd							
1,570	a	606	700		6.60x10 ⁶		b
1,720	a	606	374		2.79x10 ⁶		b
1,790	a	606	250		1.84x10 ⁶		b
1,870	a	606	210		1.14x10 ⁶		b
1,950	a	606	170		7.21x10 ⁶		b
2,030	a	606	140		4.54x10 ⁶		b
2,110	a	606	96		2.79x10 ⁶		b
2,200	a	606	77		1.69x10 ⁶		b
2,280	a	606	53		1.05x10 ⁶		b
2,370	a	606	38		6.14x10 ⁶		b
2,460	a	510 and 606	34		3.68x10 ⁶		b
2,550	a	510 and 606	27		2.15x10 ⁶		b
2,640	a	510 and 606	20		1.29x10 ⁶		b
2,730	a	510 and 606	15		7.68x10 ⁶		b
2,820	a	510 and 606	11		4.51x10 ⁶		b
2,910	a	510 and 502	8.4		2.64x10 ⁶		b
3,000	a	510 and 502	7.1		1.58x10 ⁶		b
3,100	a	510 and 502	5.5		8.84x10 ⁶		b
3,190	a	510 and 502	4.0		5.22x10 ⁶		b
3,290	a	502	2.9		2.94x10 ⁶		b
3,380	a	502	2.1		1.34x10 ⁶		b
3,470	a	502	1.7		8.47x10 ⁶		b
3,560	a	502	1.35		5.15x10 ⁶		b
3,660	a	502	1.00		4.06x10 ⁶		b
3,750	a	502	0.72		2.30x10 ⁶		b
3,850	a	502	0.6		<1x10 ⁶		b
3,940	a	502	0.54		<1x10 ⁶		b
4,040	a	502	0.32		<1x10 ⁶		b

Unknown.

b/w film holders attached to angle-lion stave.

TABLE 3.39 LAST INITIAL GAMMA DOSE DATA - OPERATION TUBELER-CHARTER, SHOT 4 (CHAPTER 1)

Slant Range	Azi- muth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Shield Type
				r	n/cm ²	
yd						
1,400	a	548-0	~200		4.90x10 ⁹	b
1,500	a	Adlux	600		2.57x10 ⁹	b
1,590	a	Adlux	400		1.46x10 ⁹	b
1,600	a	Adlux	280		7.68x10 ⁸	b
1,790	a	606	190		4.37x10 ⁸	b
1,790	a	606	210		4.07x10 ⁸	b
1,890	a	606	150		2.21x10 ⁸	b
1,890	a	606	160		2.21x10 ⁸	b
1,980	a	606	96		1.24x10 ⁸	b
1,980	a	606	100		1.24x10 ⁸	b
2,080	a	606	74		6.39x10 ⁷	b
2,080	a	606	70		6.39x10 ⁷	b
2,180	a	606	52		3.36x10 ⁷	b
2,180	a	606	51		3.41x10 ⁷	b
2,280	a	606	37		1.79x10 ⁷	b
2,380	a	606 and 510	31		9.41x10 ⁶	b
2,380	a	606 and 510	27		9.41x10 ⁶	b
2,480	a	606 and 510	22		4.99x10 ⁶	b
2,580	a	606 and 510	22		4.99x10 ⁶	b
2,580	a	606 and 510	17		2.63x10 ⁶	b
2,680	a	606 and 510	14		2.63x10 ⁶	b
2,680	a	606 and 510	11		1.38x10 ⁶	b
2,780	a	606 and 510	11.7		1.38x10 ⁶	b
2,780	a	606 and 510	8.5		7.30x10 ⁵	b
2,870	a	510 and 502	9.0		7.30x10 ⁵	b
2,870	a	510 and 502	6.7		4.13x10 ⁵	b
2,870	a	510 and 502	6.3		4.13x10 ⁵	b
2,970	a	510 and 502	5.1		2.21x10 ⁵	b
2,970	a	510 and 502	5.4		2.21x10 ⁵	b
3,070	a	510 and 502	3.5		1.15x10 ⁵	b
3,170	a	502	2.6		6.20x10 ⁴	b
3,170	a	502	2.6		6.20x10 ⁴	b
3,270	a	502	1.8		3.35x10 ⁴	b
3,370	a	502	1.4		1.07x10 ⁴	b
3,470	a	502	1.17		5.10x10 ³	b
3,570	a	502	0.74		2.77x10 ³	b
3,670	a	502	0.66		2.41x10 ³	b
3,770	a	502	0.54		1.91x10 ³	b
3,870	a	502	0.46		1.51x10 ³	b

*Shielded.
Low film technique attached to high film plates.

TABLE 3.39 LAST INITIAL GAMMA DOSE DATA - OPERATION TUBELER-CHARTER, SHOT 5 (CHAPTER 1)

Slant Range	Azi- muth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Shield Type
				r	n/cm ²	
yd						
1,300	a	Adlux	702		4.06x10 ⁹	b
1,400	a	Adlux	459		2.58x10 ⁹	b
1,500	a	Adlux	240		1.36x10 ⁹	b
1,600	a	606	210		7.20x10 ⁸	b
1,600	a	606	134		3.89x10 ⁸	b
1,700	a	606	152		3.89x10 ⁸	b
1,700	a	606	100		2.04x10 ⁸	b
1,800	a	606	96		2.04x10 ⁸	b
1,800	a	606	71		1.10x10 ⁸	b
1,900	a	606	62		1.10x10 ⁸	b
2,000	a	606	13		5.76x10 ⁷	b
2,000	a	606	90		5.76x10 ⁷	b
2,100	a	606 and 510	36		3.05x10 ⁷	b
2,200	a	606 and 510	29		1.62x10 ⁷	b
2,200	a	606 and 510	24		1.62x10 ⁷	b
2,300	a	606 and 510	21		8.46x10 ⁶	b
2,300	a	606 and 510	19		8.46x10 ⁶	b
2,400	a	606 and 510	12.6		4.44x10 ⁶	b
2,400	a	606 and 510	12		4.44x10 ⁶	b
2,500	a	606 and 510	10.0		2.40x10 ⁶	b
2,500	a	510 and 502	10.9		2.40x10 ⁶	b
2,600	a	510 and 502	9.0		1.25x10 ⁶	b
2,600	a	510 and 502	9.2		1.25x10 ⁶	b
2,700	a	510 and 502	9.9		1.25x10 ⁶	b
2,700	a	510 and 502	9.8		1.25x10 ⁶	b
2,800	a	510 and 502	4.2		1.25x10 ⁶	b
2,800	a	510 and 502	4.4		1.25x10 ⁶	b
2,900	a	502	3.9		1.25x10 ⁶	b
2,900	a	502	3.1		1.25x10 ⁶	b
3,000	a	502	2.7		1.25x10 ⁶	b
3,100	a	502	1.7		1.25x10 ⁶	b
3,200	a	502	1.4		1.25x10 ⁶	b
3,300	a	502	0.91		1.25x10 ⁶	b
3,400	a	502	0.70		1.25x10 ⁶	b
3,500	a	502	0.53		1.25x10 ⁶	b
3,600	a	502	0.44		1.25x10 ⁶	b
3,700	a	502	0.33		1.25x10 ⁶	b

*Shielded.
Low film technique attached to high film plates.

(U) TABLE 3.4.3 LAST INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SHAPEN, SHOT 6 (CHAPTER III)

Slant Range yd	Azi- muth	Film Type	Neutron Flux		Shield Type
			Uncor- rected Dose	Au n/cm ²	
1,500	a	Adlux	410	1.58x10 ⁸	b
1,600	a	Adlux	270	8.0x10 ⁷	b
1,700	a	606	180	4.0x10 ⁷	b
1,800	a	606	130	2.0x10 ⁷	b
1,900	a	606	96	1.0x10 ⁷	b
1,900	a	606	91	1.0x10 ⁷	b
2,000	a	606	70	4.88x10 ⁶	b
2,000	a	606	65	4.88x10 ⁶	b
2,100	a	606	44	2.44x10 ⁶	b
2,100	a	606	44	2.44x10 ⁶	b
2,200	a	606 and 510	31	1.22x10 ⁶	b
2,200	a	606 and 510	31	1.22x10 ⁶	b
2,300	a	606 and 510	22	<1x10 ⁶	b
2,300	a	606 and 510	22	<1x10 ⁶	b
2,400	a	606 and 510	16	<1x10 ⁶	b
2,400	a	606 and 510	16	<1x10 ⁶	b
2,500	a	606 and 510	11	<1x10 ⁶	b
2,500	a	606 and 510	12	<1x10 ⁶	b
2,600	a	510 and 502	8.1	<1x10 ⁶	b
2,600	a	510 and 502	8.3	<1x10 ⁶	b
2,700	a	510 and 502	5.7	<1x10 ⁶	b
2,700	a	510 and 502	6.0	<1x10 ⁶	b
2,800	a	510 and 502	4.1	<1x10 ⁶	b
2,800	a	510 and 502	4.2	<1x10 ⁶	b
2,900	a	502	3.0	<1x10 ⁶	b
2,900	a	502	2.9	<1x10 ⁶	b
3,000	a	502	2.1	<1x10 ⁶	b
3,100	a	502	1.7	<1x10 ⁶	b
3,200	a	502	1.2	<1x10 ⁶	b
3,300	a	502	1.1	<1x10 ⁶	b
3,400	a	502	0.85	<1x10 ⁶	b
3,500	a	502	0.44	<1x10 ⁶	b
3,600	a	502	0.21	<1x10 ⁶	b
3,700	a	502	0.37	<1x10 ⁶	b
3,800	a	502	0.77	<1x10 ⁶	b
3,900	a	502	0.23	<1x10 ⁶	b
4,000	a	502	0.17	<1x10 ⁶	b

Unknown.
VAM film holders attached to angle-ion stake.

(U) TABLE 3.4.1 LAST INITIAL GAMMA DOSE DATA - OPERATION TUMBLER-SHAPEN, SHOT 7 (CHAPTER IV)

Slant Range yd	Azi- muth	Film Type	Neutron Flux		Shield Type
			Uncor- rected Dose	Au n/cm ²	
1,410	a	Adlux	490	4.96x10 ⁸	b
1,410	a	Adlux	490	4.96x10 ⁸	b
1,610	a	606, Adlux	220	1.50x10 ⁸	b
1,610	a	606	210	1.50x10 ⁸	b
1,610	a	606	240	1.50x10 ⁸	b
1,610	a	606	210	1.50x10 ⁸	b
1,810	a	606	105	4.67x10 ⁷	b
1,810	a	606	106	4.67x10 ⁷	b
1,810	a	606	105	4.67x10 ⁷	b
1,810	a	606	100	4.67x10 ⁷	b
2,010	a	606	47	1.39x10 ⁶	b
2,010	a	606	50	1.39x10 ⁶	b
2,010	a	606	47	1.39x10 ⁶	b
2,010	a	606	50	1.39x10 ⁶	b
2,210	a	606 and 510	25	4.23x10 ⁵	b
2,210	a	606 and 510	25	4.23x10 ⁵	b
2,210	a	606 and 510	25	4.23x10 ⁵	b
2,210	a	606 and 510	13	1.26x10 ⁵	b
2,410	a	606 and 510	12.6	1.26x10 ⁵	b
2,610	a	510 and 502	6.4	<1x10 ⁵	b
2,610	a	510 and 502	6.4	<1x10 ⁵	b
2,810	a	502	3.4	<1x10 ⁵	b
2,810	a	502	3.4	<1x10 ⁵	b
2,810	a	502	3.4	<1x10 ⁵	b
2,810	a	502	3.5	<1x10 ⁵	b
3,010	a	502	1.7	<1x10 ⁵	b
3,010	a	502	1.7	<1x10 ⁵	b
3,010	a	502	1.7	<1x10 ⁵	b
3,210	a	502	0.86	<1x10 ⁵	b
3,210	a	502	0.86	<1x10 ⁵	b
3,410	a	502	0.82	<1x10 ⁵	b
3,410	a	502	0.84	<1x10 ⁵	b
3,610	a	502	0.78	<1x10 ⁵	b
3,610	a	502	0.78	<1x10 ⁵	b
3,810	a	502	0.15	<1x10 ⁵	b
3,810	a	502	0.15	<1x10 ⁵	b

Unknown.
VAM film holders attached to angle-ion stake.

(U)

TABLE 3.4: LAST INITIAL GAMMA DOSE DATA - OPERATION
TUGGER-SHAPER, SHOT 8 (SHAPER V)

Start Range	Azi- muth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Shield Type
				r	Au n/cm ²	
yd						
1,500	a	Adlux	14.0		7.0×10^8	b
1,600	a	Adlux	31.0		3.7×10^8	b
1,700	a	606, Adlux	190		1.97×10^8	b
1,700	a	606, Adlux	190		1.97×10^8	b
1,800	a	606, Adlux	130		1.04×10^8	b
1,800	a	606, Adlux	140		1.04×10^8	b
1,900	a	606, Adlux	96		5.28×10^8	b
1,900	a	606, Adlux	96		5.28×10^8	b
2,000	a	606, Adlux	69		2.82×10^8	b
2,000	a	606, Adlux	66		2.82×10^8	b
2,100	a	606, Adlux	49		1.47×10^8	b
2,100	a	606, Adlux	49		1.47×10^8	b
2,200	a	606, 510	35		7.65×10^8	b
2,200	a	606, 510	35		7.65×10^8	b
2,300	a	606, 510	26		4.03×10^8	b
2,300	a	606, 510	26		4.03×10^8	b
2,400	a	606, 510	20		2.79×10^8	b
2,400	a	606, 510	18		2.79×10^8	b
2,500	a	606, 510	15		1.11×10^8	b
2,500	a	606, 510	15		1.11×10^8	b
2,600	a	606, 510	10		$< 1 \times 10^8$	b
2,700	a	510, 502	7.7		$< 1 \times 10^8$	b
2,800	a	510, 502	5.6		$< 1 \times 10^8$	b
2,800	a	510, 502	5.4		$< 1 \times 10^8$	b
2,900	a	510, 502	4.0		$< 1 \times 10^8$	b
2,900	a	510, 502	3.9		$< 1 \times 10^8$	b
3,000	a	502	3.1		$< 1 \times 10^8$	b
3,000	a	502	3.0		$< 1 \times 10^8$	b
3,100	a	502	2.4		$< 1 \times 10^8$	b
3,100	a	502	2.3		$< 1 \times 10^8$	b
3,200	a	502	1.7		$< 1 \times 10^8$	b
3,200	a	502	1.6		$< 1 \times 10^8$	b
3,300	a	502	1.1		$< 1 \times 10^8$	b
3,400	a	502	0.94		$< 1 \times 10^8$	b
3,500	a	502	0.72		$< 1 \times 10^8$	b
3,600	a	502	0.54		$< 1 \times 10^8$	b
3,700	a	502	0.39		$< 1 \times 10^8$	b
3,800	a	502	0.31		$< 1 \times 10^8$	b

Uncertainty
Low - values attributed to depletion state.

(U) TABLE 3.43 SHOT INFORMATION - OPERATION IVY
(S-85)

Shot Designation	Date and Time Fired	Location and Type	Yield		HE Thickness
			Height of Burst	Total	
			ft	kt	cm
Mike	31 Oct 1952 1914:59 GMT	Flora-Surface	0	1.04x10 ⁴	a
King	16 Nov 1952 2330:GMT	Yvonne-Air	1480 540	540	43.97

^a Not reported.

(U) TABLE 3.44 METEOROLOGICAL DATA - OPERATION IVY

Shot	Pressure	Temperature	Density		ρ/ρ_s	$(\rho_s/\rho)^2$
	mb	°K	g/cm ³ x10 ³			
Mike	1,010.7	302.4	1.17	0.90		1.23
King	1,101.7	301	1.14	0.88		1.29

TABLE 3.45 INITIAL GAMMA DOSE DATA - OPERATION IVI, SHOT KING

Slant Range	Azimuth	Film Type	Neutron Flux		Shield Type	Attenuation Factor	Soil Contribution
			Uncorrected Gamma Dose ^a	Au n/cm ²			
yd			F				F
4,500	a	605	140±20	<1x10 ⁶	b	1.0	0
4,800	a	605	150±30	<1x10 ⁶	b	1.0	0
5,100	a	510	25±3	<1x10 ⁶	b	1.0	0
5,500	a	510	18±1	<1x10 ⁶	b	1.0	0
5,700	a	502	4.1±0.2	<1x10 ⁶	b	1.0	0
5,900	a	502	2.3±0.4	<1x10 ⁶	b	1.0	0
5,900	a	605	14±1	<1x10 ⁶	b	1.0	0
6,000	a	502	2.3±0.3	<1x10 ⁶	b	1.0	0

^aDoes not include the error due to discrepancy in dropping time.

^bUnknown.

^cAluminum drop gadget.

TABLE 3.46 INITIAL GAMMA DOSE DATA - OPERATION IVI, SHOT KING

Slant Range	Azimuth	Film Type	Neutron Flux		Shield Type	Total Correction	Corrected Gamma Dose	Atten-uation Factor	Final Corrected Gamma Dose	Soil Contribution
			Uncor-rected Gamma Dose	Au						
			F	n/cm ²						
yd										
2,020	a	548-0	2100	5.2x10 ⁶	b	29±12	2170	1.0	2370	<0.1
2,120	a	1290	1440	2.5x10 ⁶	b	0.53	1050	1.0	1050	<0.1
2,280	a	1290	960	1.2x10 ⁶	b	0.20	1100	1.0	1100	<0.1
2,320	a	1290	650	6.0x10 ⁶	b	0.07	749	1.0	749	<0.1
2,420	a	1290	490	3.0x10 ⁶	b	0.03	559	1.0	559	<0.1
2,510	a	1290	350	1.5x10 ⁶	b	0.01	400	1.0	400	<0.1
2,610	a	1290	240	7.4x10 ⁶	b	<0.01	280	1.0	280	<0.1
2,710	a	1290	175	3.5x10 ⁶	b	<0.01	200	1.0	200	<0.1
2,810	a	605	140	1.7x10 ⁶	b	<0.01	160	1.0	160	<0.1
2,910	a	605	91.4	7.5x10 ⁶	b	<0.01	100	1.0	100	<0.1
3,010	a	605	67	4.0x10 ⁶	b	<0.01	77	1.0	77	<0.1
3,100	a	605	50	2.1x10 ⁶	b	<0.01	58	1.0	58	<0.1
3,200	a	605	37	1.0x10 ⁶	b	<0.01	42	1.0	42	<0.1
3,300	a	605	30	<5x10 ⁶	b	<0.01	36	1.0	36	<0.1
3,400	a	510	21	<5x10 ⁶	b	<0.01	24	1.0	24	<0.1
3,500	a	510	17	<5x10 ⁶	b	<0.01	17	1.0	17	<0.1
3,600	a	510	12	<5x10 ⁶	b	<0.01	14	1.0	14	<0.1
3,700	a	510	9.1	<5x10 ⁶	b	<0.01	10.5	1.0	10.5	<0.1
3,800	a	502	5.6	<5x10 ⁶	b	<0.01	6.2	1.0	6.2	<0.1
3,900	a	502	5.6	<5x10 ⁶	b	<0.01	6.4	1.0	6.4	<0.1
4,000	a	502	4.0	<5x10 ⁶	b	<0.01	4.0	1.0	4.0	<0.1
4,100	a	502	2.7	<5x10 ⁶	b	<0.01	2.7	1.0	2.7	<0.1
4,200	a	502	2.0	<5x10 ⁶	b	<0.01	2.0	1.0	2.0	<0.1

^aUnknown.
^bLow film holders subjected to neutron attack.

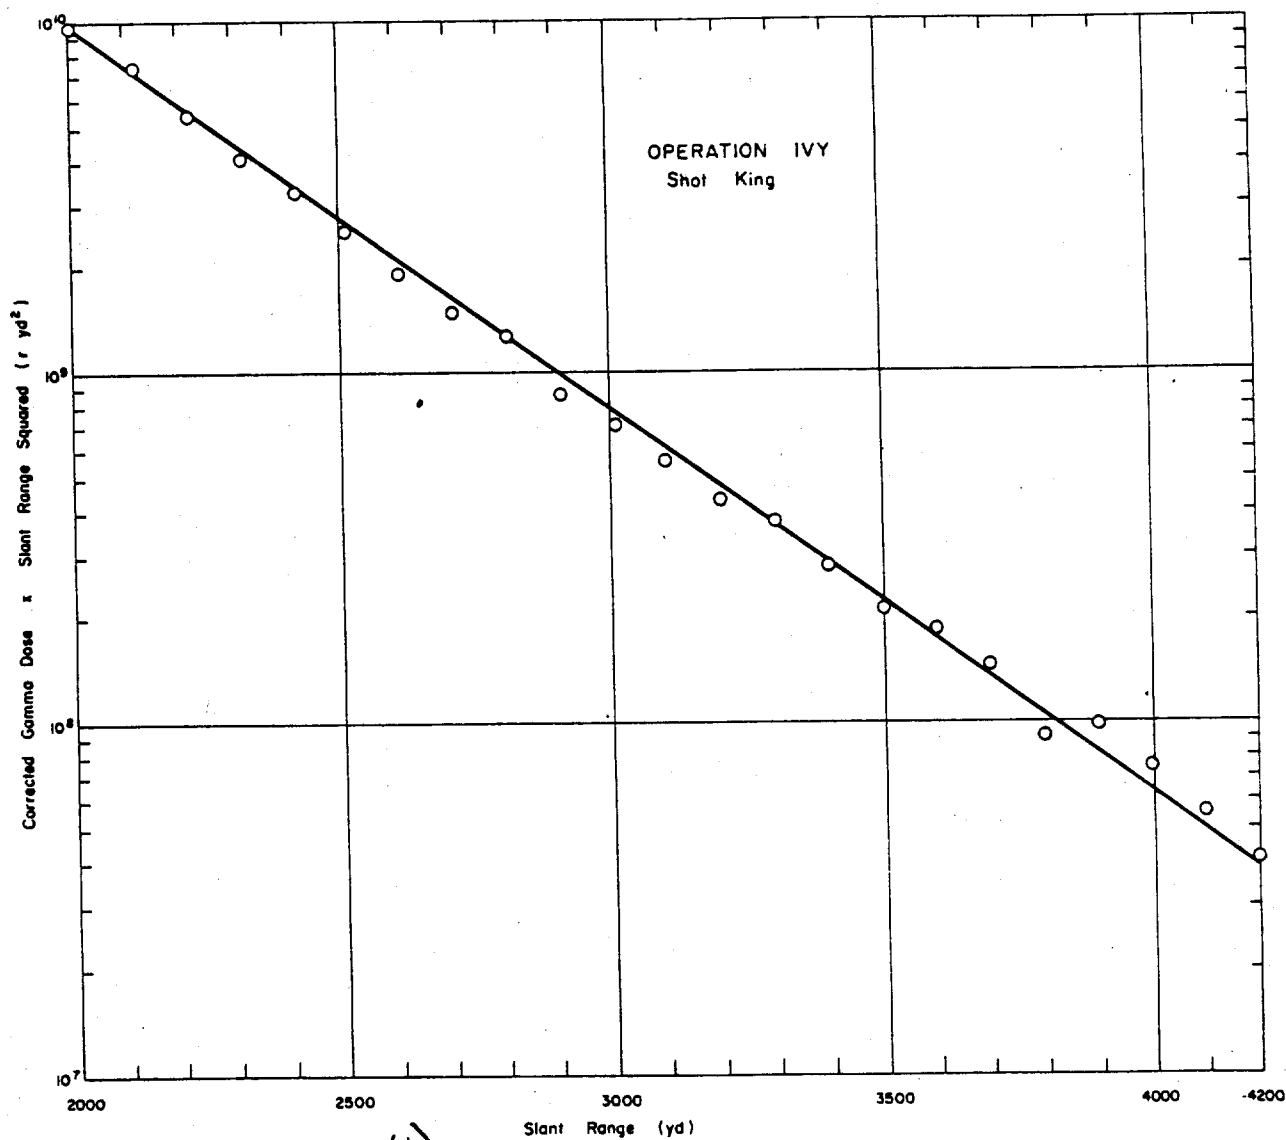


Figure 3.29 (U) Operation Ivy - Shot King - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(5-40) TABLE 3.47 SHOT INFORMATION - OPERATION UPSHOT-KNOTHOLE

Shot Designation	Date and Time Fired	Location and Type	Height of Burst		Total
			ft	kt	
1 (Annie)	17 Mar 1953 1330:00 GMT	Area 3-Tower	300	17.1	
2 (Honey)	24 Mar 1953 1310:01 GMT	Area 4-Tower	300	24	
3 (Ruth)	31 Mar 1953 1300:00 GMT	Area 7-5A-Tower	304.7	0.20	
5 (Ray)	11 April 1953 1245:00 GMT	Area 4A-Tower	100	0.21	
6 (Badger)	18 April 1953 1235:00 GMT	Area 2-Tower	300	25	
7 (Simon)	25 April 1953 1230:00 GMT	Area 1-Tower	300	45	
8 (Encore)	8 May 1953 1529:55 GMT	PT-Air	2425	26	
9 (Harry)	19 May 1953 1205:00 GMT	Area 3A-Tower	300	32.3	
10 (Grable)	25 May 1953 1530:00 GMT	PT-Gun	524	15	
11 (Climax)	4 June 1953 1114 GMT	Area 7-3-Air	1334	60	

(U) TABLE 3.48 METEOROLOGICAL DATA - OPERATION UPSHOT-KNOTHOLE

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	ρ/ρ_0	$(\rho_0/\rho)^2$
1	876	275.7	1.10	0.85	1.39
2	870	282.9	1.06	0.82	1.49
3	873	277.4	1.09	0.84	1.42
5	869	272.7	1.11	0.86	1.35
6	862	280.7	1.06	0.83	1.49
7	870	284.7	1.06	0.83	1.49
8	900	289.7	1.04	0.80	1.56
9	874	287.3	1.05	0.81	1.53
10	901	297.8	1.00	0.84	1.42
11	867	296.3	1.03	0.73	1.60

TABLE 3.49 SCEI INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 1 (ANNIE)


Slant Range Azimuth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
			r	n/cm ²									
yd													
1,400	a	1290	606	8.42x10 ⁹	1.72	2.2	b	0.12	4.04	602	1.0	602	2.5
1,500	a	1290	390	4.45x10 ⁹	0.95	1.2	b	0.090	2.23	368	1.0	368	1.3
1,600	a	1290	244	2.57x10 ⁹	0.53	0.67	b	0.041	1.241	243	1.0	243	0.67
1,700	a	1290	170	1.44x10 ⁹	0.29	0.35	b	0.026	0.666	169	1.0	169	0.67
1,800	a	606	112	8.00x10 ⁸	0.18	0.12	b	0.016	0.326	112	1.0	112	0.67
1,900	a	606	70	4.42x10 ⁸	0.10	0.07	b	0.008	0.178	70	1.0	70	0.67
2,000	a	606	43	3.30x10 ⁸	0.07	0.07	b	0.008	0.178	43	1.0	43	0.67
2,100	a	606	29.5	1.39x10 ⁸	0.04	0.07	b	0.008	0.178	29.5	1.0	29.5	0.67
2,200	a	510	15.1	4.29x10 ⁷	0.02	0.07	b	0.008	0.178	15.1	1.0	15.1	0.67
2,300	a	510	10.5	2.39x10 ⁷	0.01	0.07	b	0.008	0.178	10.5	1.0	10.5	0.67
2,400	a	510	7.3	1.32x10 ⁷	0.01	0.07	b	0.008	0.178	7.3	1.0	7.3	0.67
2,500	a	510	5.1	7.26x10 ⁶	0.01	0.07	b	0.008	0.178	5.1	1.0	5.1	0.67
2,600	a	508	3.5	4.04x10 ⁶	0.01	0.07	b	0.008	0.178	3.5	1.0	3.5	0.67
2,700	a	508	2.3	2.26x10 ⁶	0.01	0.07	b	0.008	0.178	2.3	1.0	2.3	0.67
2,800	a	508	1.7	1.24x10 ⁶	0.01	0.07	b	0.008	0.178	1.7	1.0	1.7	0.67
2,900	a	508	1.3	6.91x10 ⁵	0.01	0.07	b	0.008	0.178	1.3	1.0	1.3	0.67
3,000	a	508	0.95	3.68x10 ⁵	0.01	0.07	b	0.008	0.178	0.95	1.0	0.95	0.67

Unknown.
b)BS film holders attached to aluminum stake.

TABLE 3.50 SCEI INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 2 (NANCY)

Slant Range Azimuth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
			r	n/cm ²									
yd													
1,400	a	1290	660	1.38x10 ⁹	2.82	2.9	b	0.20	5.92	654	1.0	654	4.6
1,500	a	1290	425	8.10x10 ⁸	1.65	1.7	b	0.12	3.47	421	1.0	421	2.6
1,600	a	1290	272	4.40x10 ⁸	0.90	0.94	b	0.06	1.90	270	1.0	270	1.6
1,700	a	1290	162	2.54x10 ⁸	0.52	0.53	b	0.03	1.09	161	1.0	161	0.87
1,800	a	606	120	1.45x10 ⁸	0.33	0.19	b	0.01	0.34	119	1.0	119	0.87
1,900	a	606	80	8.16x10 ⁷	0.19	0.11	b	0.01	0.31	80	1.0	80	0.87
2,000	a	606	52	4.69x10 ⁷	0.11	0.06	b	0.008	0.178	52	1.0	52	0.87
2,100	a	606	34	2.59x10 ⁷	0.07	0.06	b	0.008	0.178	34	1.0	34	0.87
2,200	a	510	22	1.57x10 ⁷	0.04	0.06	b	0.008	0.178	22	1.0	22	0.87
2,300	a	510	16	8.57x10 ⁶	0.03	0.06	b	0.008	0.178	16	1.0	16	0.87
2,400	a	510	10.8	4.69x10 ⁶	0.02	0.06	b	0.008	0.178	10.8	1.0	10.8	0.87
2,500	a	510	7.7	2.58x10 ⁶	0.01	0.06	b	0.008	0.178	7.7	1.0	7.7	0.87
2,600	a	510	5.3	1.57x10 ⁶	0.01	0.06	b	0.008	0.178	5.3	1.0	5.3	0.87
2,700	a	508	4.7	8.69x10 ⁵	0.01	0.06	b	0.008	0.178	4.7	1.0	4.7	0.87
2,800	a	508	3.65	5.08x10 ⁵	0.01	0.06	b	0.008	0.178	3.65	1.0	3.65	0.87
2,900	a	508	2.65	2.96x10 ⁵	0.01	0.06	b	0.008	0.178	2.65	1.0	2.65	0.87
3,000	a	508	1.9	1.79x10 ⁵	0.01	0.06	b	0.008	0.178	1.9	1.0	1.9	0.87

Unknown.
b)BS film holders attached to aluminum stake.

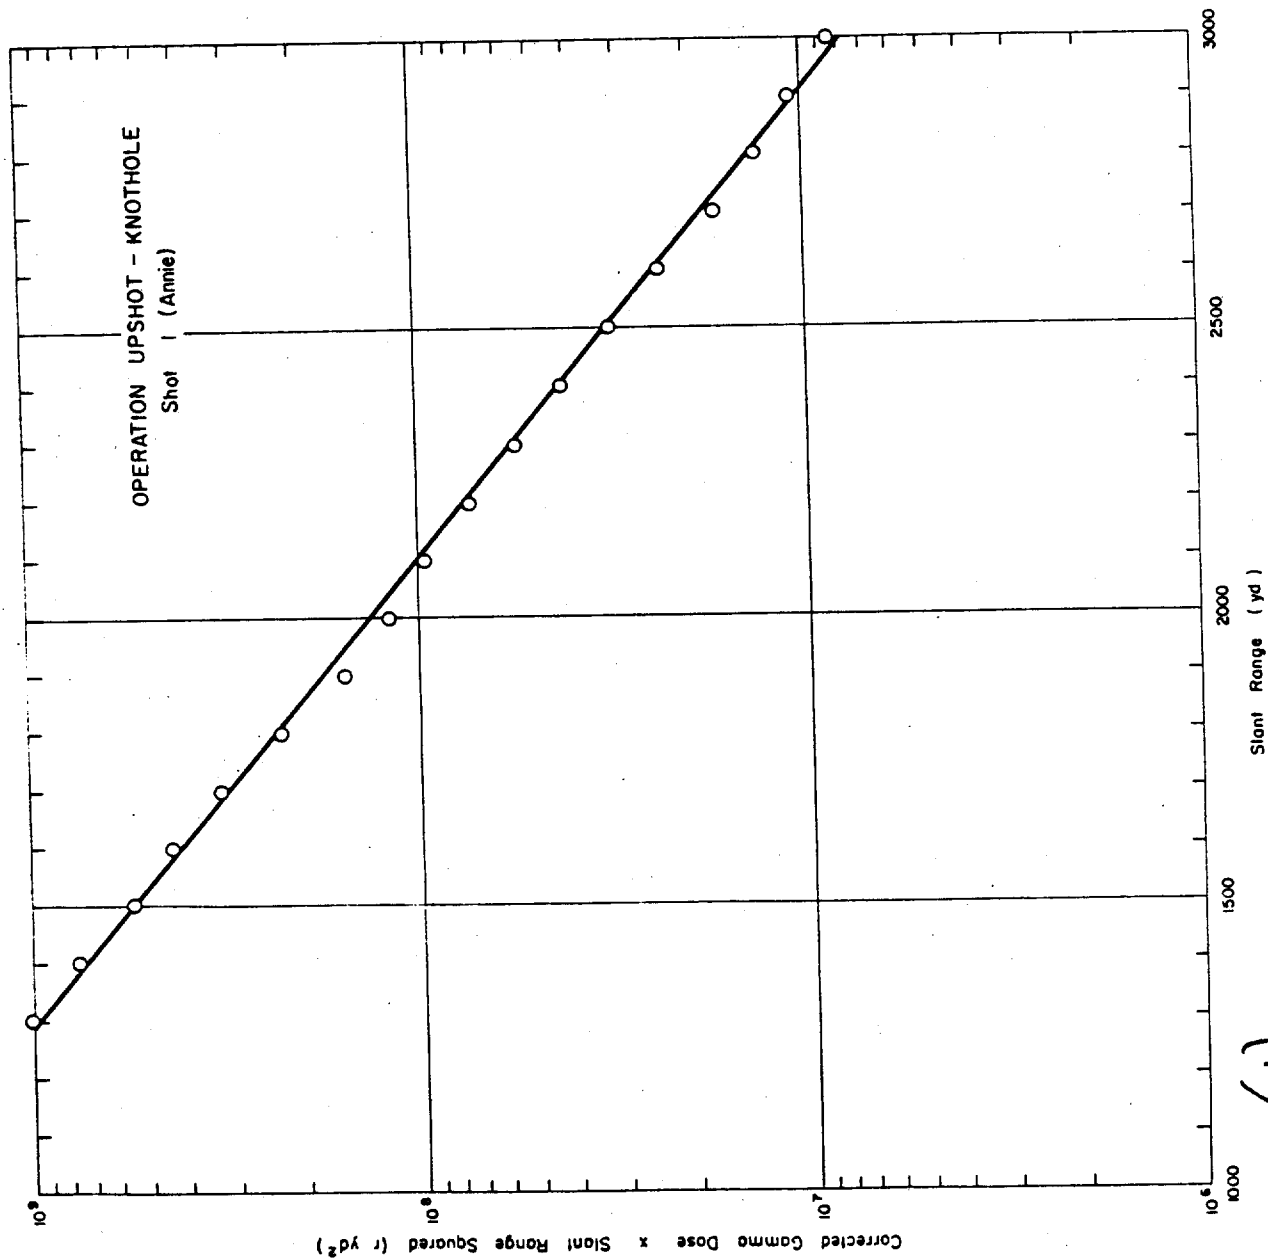

(u) Figure 3.30 (S-RM) Operation Upshot-Knothole - Shot 1 (Annie) - Corrected gamma-dose - times-slant-range-squared versus slant-range (U).

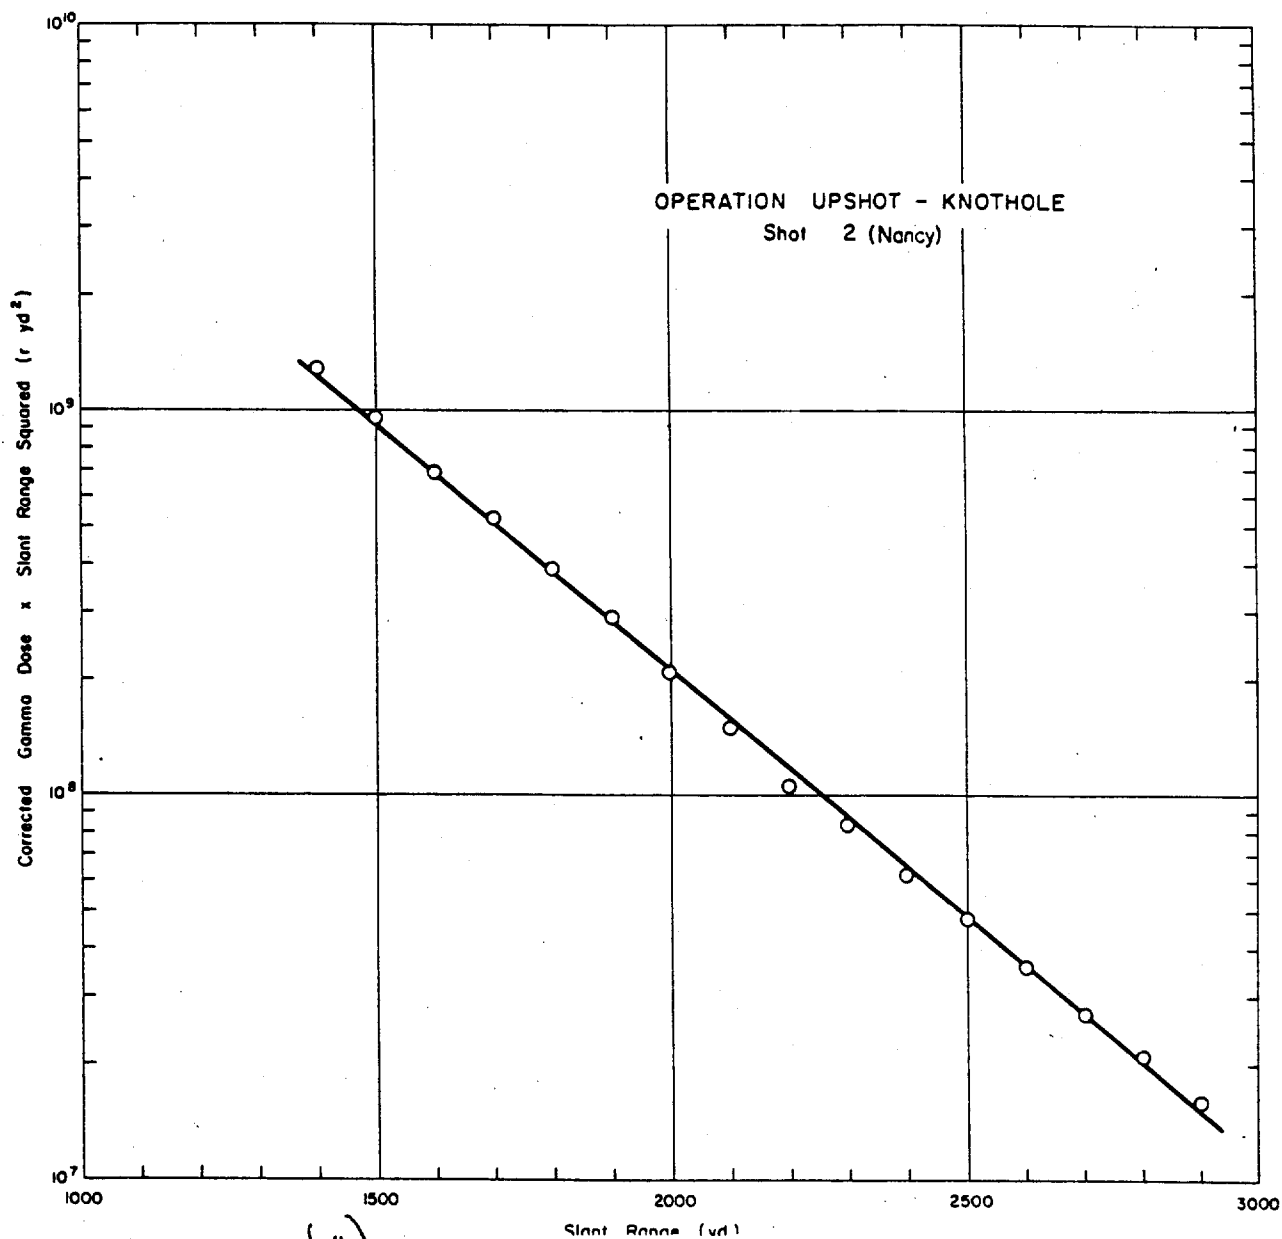


Figure 3.31 (S-RD) Operation Upshot-Knothole - Shot 2 (Nancy) -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

TABLE 3.5.1 SEEL INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 5 (NORTH)

Slant Range yd	Azimuth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Shield Type
				Au n/cm ²	S n/cm ²	
412	a	1-90	530	2.33x10 ⁶	b	c
510	a	1-90	272	7.26x10 ⁶	b	c
608	a	1-90	148	3.59x10 ⁶	b	c
708	a	606	80	1.91x10 ⁶	b	c
807	a	606	46	8.14x10 ⁶	b	c
906	a	606	26	5.02x10 ⁶	b	c
1,000	a	510	15	3.08x10 ⁶	b	c
1,100	a	510	10	1.69x10 ⁶	b	c
1,200	a	510	6.7	9.27x10 ⁶	b	c
1,300	a	510	4.4	4.97x10 ⁶	b	c
1,400	a	508	2.9	2.86x10 ⁶	b	c
1,500	a	508	1.9	1.54x10 ⁶	b	c
1,600	a	508	1.3	8.36x10 ⁶	b	c
1,700	a	508	0.95	4.62x10 ⁶	b	c
1,900	a	508	0.39	1.41x10 ⁶	b	c
2,000	a	508	0.28	7.70x10 ⁶	b	c
2,100	a	508	0.21	4.18x10 ⁶	b	c
2,200	a	508	0.15	2.31x10 ⁶	b	c

Unknown.
No data.

Seel film holders attached to angle-iron stake.

TABLE 3.5.2 SEEL INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 5 (NORTH)

Slant Range yd	Azimuth	Film Type	Uncor- rected Gamma Dose	Neutron Flux		Shield Type	Fast Correc- tion	Thermal Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contribution
				Au n/cm ²	S n/cm ²								
203	a	548-0 6240	5.03x10 ⁴	5.03x10 ⁴	5.03x10 ⁴	b	1.0	1.0	1.0	6000	1.0	6000	98
253	a	548-0 3200	1.50x10 ⁴	1.50x10 ⁴	1.50x10 ⁴	b	1.0	1.0	1.0	3120	1.0	3120	26
302	a	548-0 1650	7.89x10 ³	7.89x10 ³	7.89x10 ³	b	1.0	1.0	1.0	1600	1.0	1600	16
352	a	1290 1000	3.20x10 ³	3.20x10 ³	3.20x10 ³	b	1.0	1.0	1.0	988	1.0	988	5.5
401	a	1290 720	1.77x10 ³	1.77x10 ³	1.77x10 ³	b	1.0	1.0	1.0	743	1.0	743	5.3
514	a	1290 270	9.25x10 ²	9.25x10 ²	9.25x10 ²	b	1.0	1.0	1.0	274	1.0	274	2.0
622	a	606 120	5.79x10 ²	5.79x10 ²	5.79x10 ²	b	1.0	1.0	1.0	129	1.0	129	0.5
733	a	606 71	1.09x10 ²	1.09x10 ²	1.09x10 ²	b	1.0	1.0	1.0	71	1.0	71	0.5
846	a	606 44	5.84x10 ¹	5.84x10 ¹	5.84x10 ¹	b	1.0	1.0	1.0	44	1.0	44	0.5
951	a	606 20	1.18x10 ¹	1.18x10 ¹	1.18x10 ¹	b	1.0	1.0	1.0	20	1.0	20	0.5
1,054	a	510 10.2	7.45x10 ⁰	7.45x10 ⁰	7.45x10 ⁰	b	1.0	1.0	1.0	10.2	1.0	10.2	0.5
1,177	a	510 6.35	5.13x10 ⁰	5.13x10 ⁰	5.13x10 ⁰	b	1.0	1.0	1.0	6.35	1.0	6.35	0.5

Unknown.
No data.

Seel film holders attached to aluminum stake.

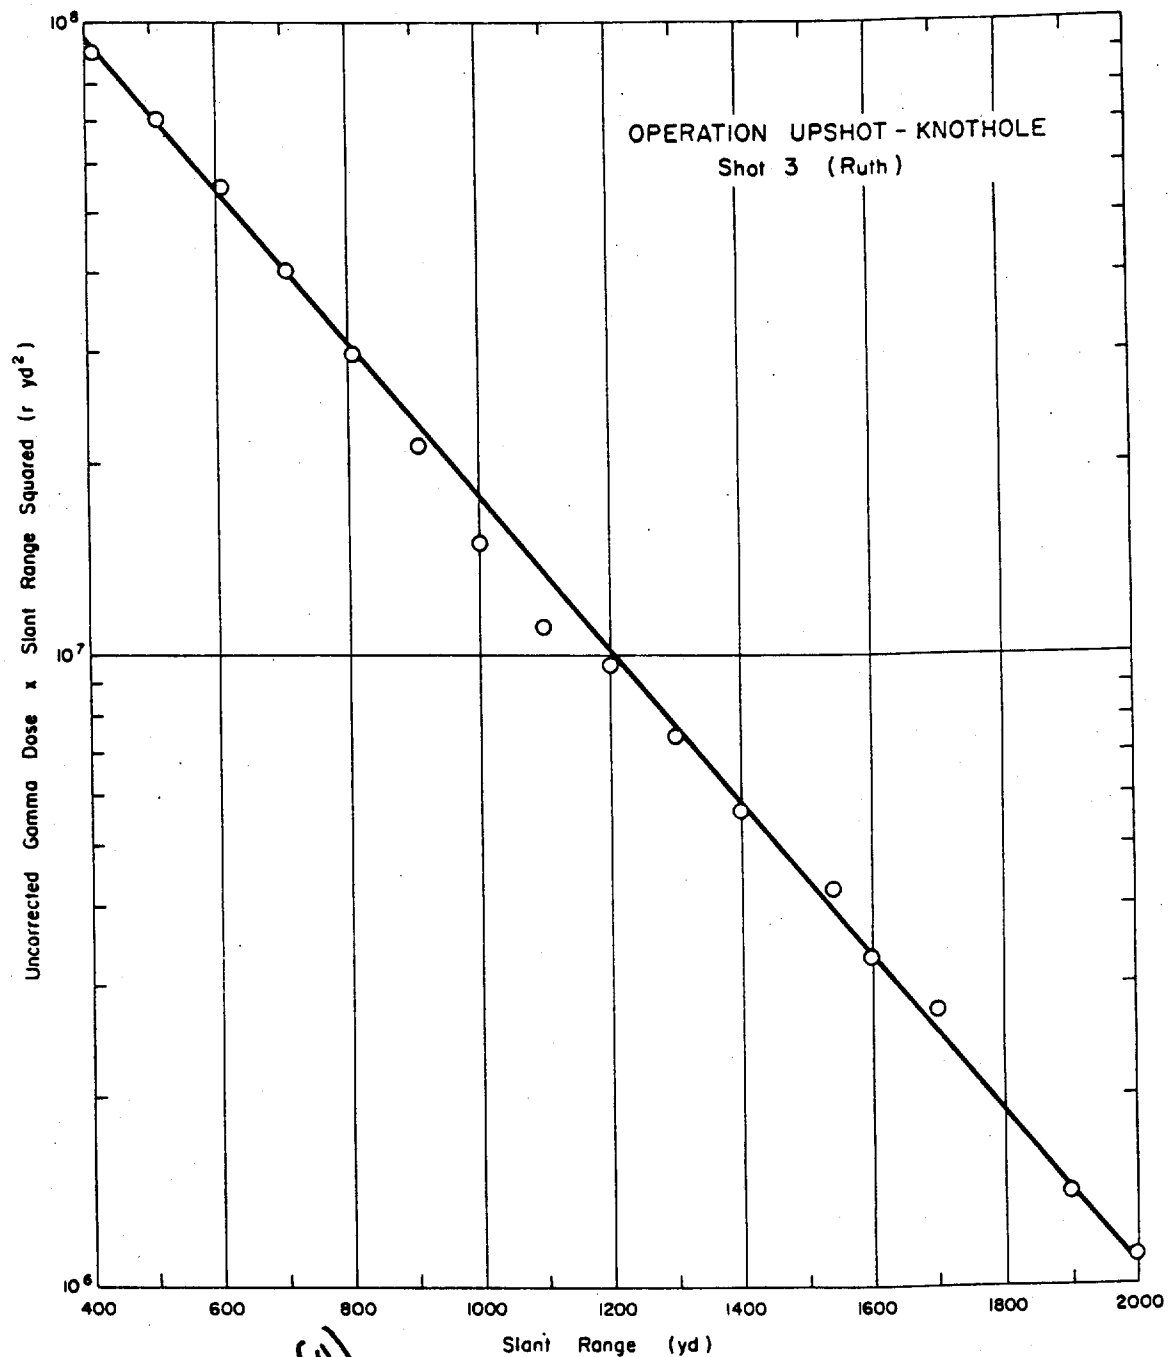


Figure 3.32 (S-PD) Operation Upshot-Knothole - Shot 3 (Ruth) -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

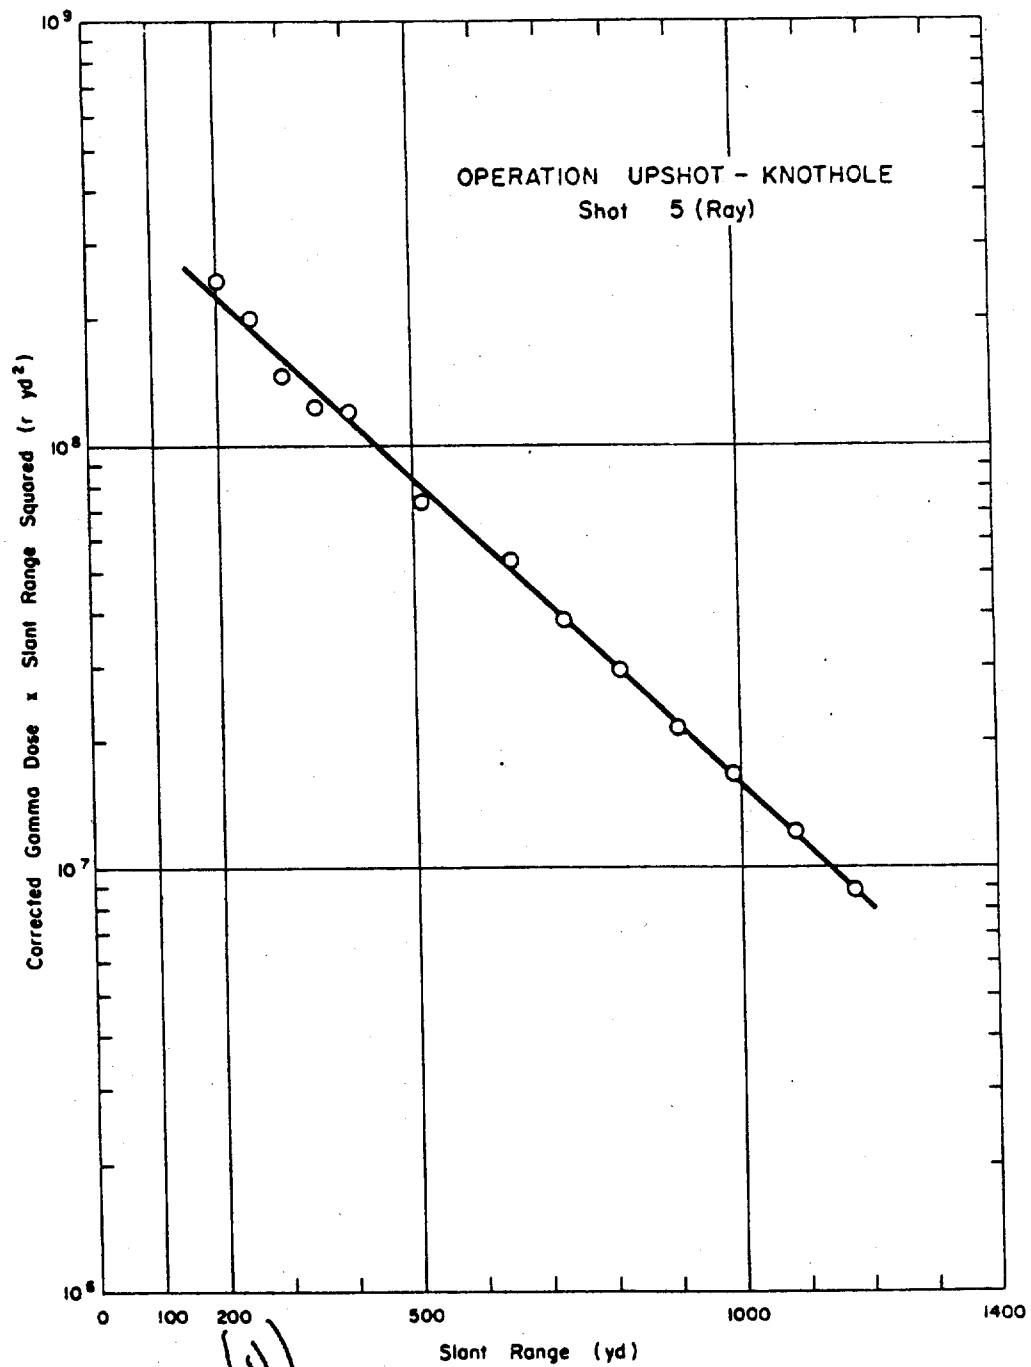


Figure 3.33 (S-~~RD~~) Operation Upshot-Knothole - Shot 5 (Ray) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

TABLE 3.53 SEEL INITIAL GAMMA DOSE DATA - OPERATION USHIRT-KNOHOLE, SHOT 6 (BAUER)

Slant Range	Azimuth	Film Type	Uncorrected Gamma Dose	Neutron Flux		Atmospheric Correction Factor	Shield Type	Shield Correction Factor	Total Correction	Corrected Gamma Dose	Final Corrected Gamma Dose	Soil Contribution
				Au	n/cm ²							
yd			r		n/cm ²							
900	0	548-0	8720	1.41x10 ¹¹	1.87	1.0	b	1.03	236.77	8480	8480	55
1,000	0	548-0	1450	7.23x10 ¹⁰	0.76	1.0	b	0.76	85.25	1450	1450	21
1,100	0	548-0	2470	3.75x10 ¹⁰	0.48	1.0	b	0.48	52.80	2470	2470	13
1,200	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,300	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,400	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,500	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,600	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,700	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,800	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
1,900	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,000	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,100	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,200	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,300	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,400	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,500	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,600	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,700	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,800	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2
2,900	0	548-0	1000	1.63x10 ¹⁰	0.24	1.0	b	0.24	26.34	1000	1000	6.2

Unknown.
No data.
CHBS film holders attached to angle-iron stake.

TABLE 3.54 SEEL INITIAL GAMMA DOSE DATA - OPERATION USHIRT-KNOHOLE, SHOT 7 (SIMON)

Slant Range	Azimuth	Film Type	Uncorrected Gamma Dose	Neutron Flux		Shield Type
				Au	S	
yd			r	n/cm ²	n/cm ²	
1,166	0	548-0	6100	b	b	c
1,566	0	548-0	1150	b	b	c
1,666	0	548-0	716	b	b	c
1,766	0	548-0	540	b	b	c
1,866	0	548-0	380	b	b	c
1,966	0	548-0	225	b	b	c
2,066	0	548-0	153	b	b	c
2,166	0	548-0	84	b	b	c
2,266	0	548-0	50	b	b	c
2,366	0	548-0	36	b	b	c
2,466	0	548-0	24	b	b	c
2,566	0	548-0	17	b	b	c
2,666	0	548-0	11.3	b	b	c
2,766	0	548-0	7.6	b	b	c
2,866	0	548-0	5.1	b	b	c
2,966	0	548-0	4.4	b	b	c

Unknown.
No data.
CHBS film holders attached to angle-iron stake.

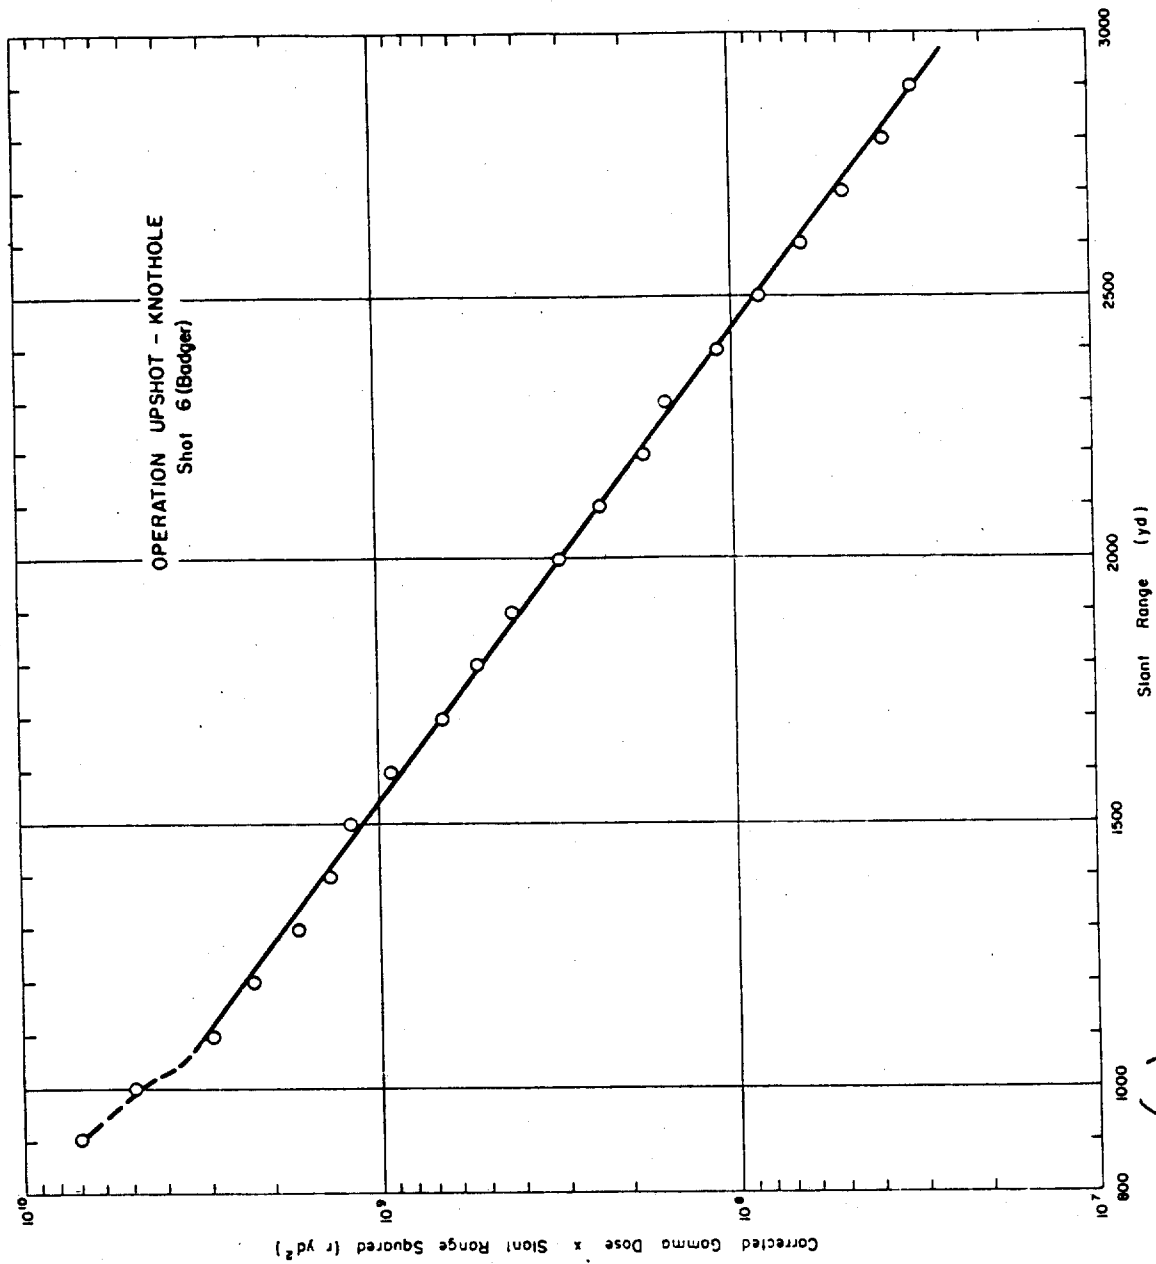


Figure 3.34 (S. 100) (U) Operation Upshot-Knothole - Shot 6 (Badger) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

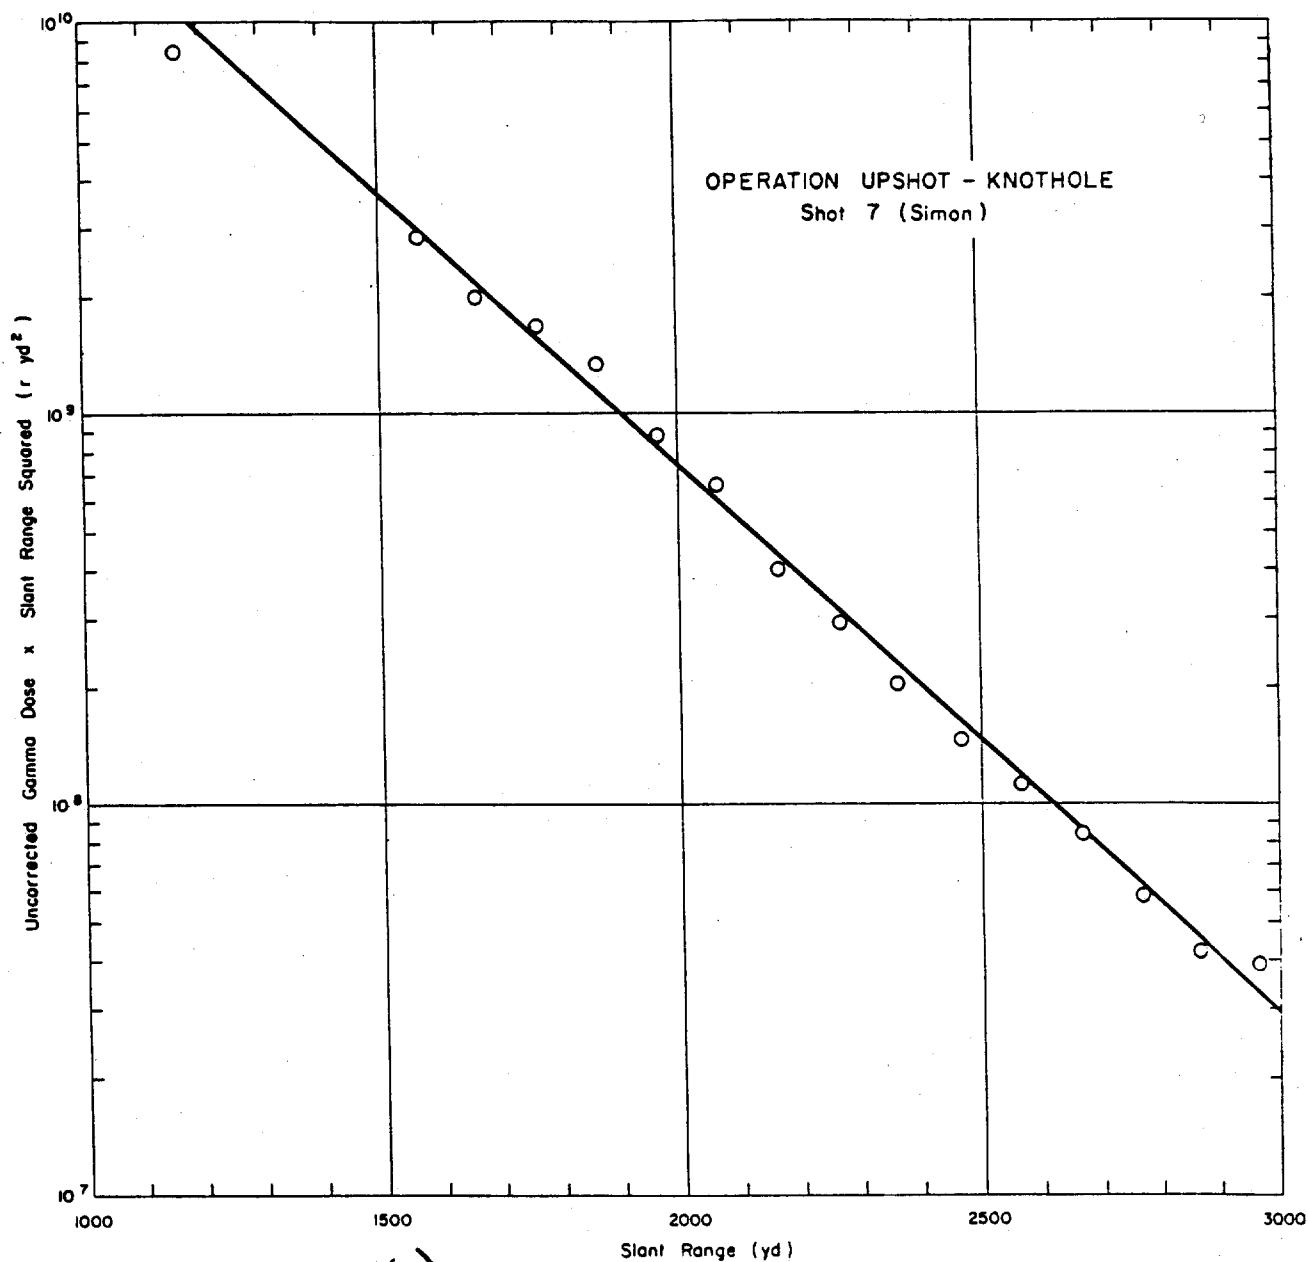



Figure 3.35 (S-PD) Operation Upshot-Knothole - Shot 7 (Simon)-
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

(U)

TABLE 3.55: SOIL INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 8 (ENCLOSURE)

Slant Range	Azimuth	Film Type	Uncorrected Gamma Dose	Reaction Flux		Thermal Correction	Fast Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Corrected Gamma Dose	Soil Contribution
				Au	n/cm ²									
yd														
1,140	a	548-0	11,050	5.4x10 ⁹		6.1	72	b	0.77	70.57	10,970	1.0	10,970	33
1,149	a	548-0	10,050	5.1x10 ⁹		5.8	69	b	0.71	75.51	9,975	1.0	9,975	30
1,187	a	548-0	7,950	3.9x10 ⁹		4.4	55	b	0.51	59.91	7,590	1.0	7,590	23
1,253	a	548-0	5,240	2.7x10 ⁹		3.1	38	b	0.38	41.48	5,200	1.0	5,200	16
1,300	a	548-0	4,000	2.0x10 ⁹		2.3	30	b	0.31	32.61	3,970	1.0	3,970	13
1,353	a	548-0	2,800	1.5x10 ⁹		1.7	24	b	0.16	25.86	2,770	1.0	2,770	10
1,591	a	1290	850	3.2x10 ⁸		0.66	1.0	b	0.001	1.721	845	1.0	845	6.2
1,670	a	1290	588	2.0x10 ⁸		0.41	0.63	b	0.009	1.069	507	1.0	507	2.5
1,746	a	1290	432	1.27x10 ⁸		0.26	0.42	b	0.009	0.68	431	1.0	431	1.3
1,822	a	1290	336	8.0x10 ⁷		0.16	0.27	b	0.009	0.43	334	1.0	334	0.74
1,900	a	1290	240	5.0x10 ⁷		0.10	0.19	b	0.009	0.29	210	1.0	210	0.74
1,922	a	1290	152	3.0x10 ⁷		0.10	0.19	b	0.009	0.29	152	1.0	152	0.74
2,026	a	606	116	1.8x10 ⁷		0.10	0.19	b	0.009	0.29	116	1.0	116	0.74
2,149	a	606	78	1.05x10 ⁷		0.10	0.19	b	0.009	0.29	78	1.0	78	0.74
2,236	a	606	57	6.5x10 ⁶		0.10	0.19	b	0.009	0.29	57	1.0	57	0.74
2,322	a	606	42	3.7x10 ⁶		0.10	0.19	b	0.009	0.29	42	1.0	42	0.74
2,435	a	606	30	2.1x10 ⁶		0.10	0.19	b	0.009	0.29	30	1.0	30	0.74
2,496	a	510	21	1.27x10 ⁶		0.10	0.19	b	0.009	0.29	21	1.0	21	0.74
2,588	a	510	15	6.8x10 ⁵		0.10	0.19	b	0.009	0.29	15	1.0	15	0.74
2,681	a	510	11	3.9x10 ⁵		0.10	0.19	b	0.009	0.29	11	1.0	11	0.74
2,771	a	510	8.5	2.2x10 ⁵		0.10	0.19	b	0.009	0.29	8.5	1.0	8.5	0.74
2,865	a	510	6.3	1.2x10 ⁵		0.10	0.19	b	0.009	0.29	6.3	1.0	6.3	0.74
2,953	a	510	4.75	7.3x10 ⁴		0.10	0.19	b	0.009	0.29	4.75	1.0	4.75	0.74
1,418	c	548-0	2,100	9.8x10 ⁸		1.1	16	b	0.14	17.2	2,080	1.0	2,080	6.2
1,600	c	1290	720	3.0x10 ⁸		0.61	0.89	b	0.14	1.5	718	1.0	718	2.1
1,676	c	1290	536	1.9x10 ⁸		0.39	0.63	b	0.14	1.02	535	1.0	535	1.2
1,749	c	1290	388	1.2x10 ⁸		0.26	0.42	b	0.14	0.68	387	1.0	387	0.74
1,825	c	1290	280	7.6x10 ⁷		0.16	0.27	b	0.14	0.43	280	1.0	280	0.74
1,900	c	1290	192	5.0x10 ⁷		0.10	0.19	b	0.14	0.29	192	1.0	192	0.74
1,982	c	1290	144	3.0x10 ⁷		0.10	0.19	b	0.14	0.29	144	1.0	144	0.74
2,062	c	606	108	1.6x10 ⁷		0.10	0.19	b	0.14	0.29	108	1.0	108	0.74
2,145	c	606	78	1.05x10 ⁷		0.10	0.19	b	0.14	0.29	78	1.0	78	0.74
2,232	c	606	58	6.5x10 ⁶		0.10	0.19	b	0.14	0.29	58	1.0	58	0.74
2,319	c	606	42	3.7x10 ⁶		0.10	0.19	b	0.14	0.29	42	1.0	42	0.74
2,404	c	606	30	2.1x10 ⁶		0.10	0.19	b	0.14	0.29	30	1.0	30	0.74
2,490	c	510	20	1.27x10 ⁶		0.10	0.19	b	0.14	0.29	20	1.0	20	0.74
2,579	c	510	14.8	7.2x10 ⁵		0.10	0.19	b	0.14	0.29	14.8	1.0	14.8	0.74
2,763	c	510	8.1	2.4x10 ⁵		0.10	0.19	b	0.14	0.29	8.1	1.0	8.1	0.74
2,846	c	510	6	1.37x10 ⁵		0.10	0.19	b	0.14	0.29	6	1.0	6	0.74
2,943	c	508	4.4	7.0x10 ⁴		0.10	0.19	b	0.14	0.29	4.4	1.0	4.4	0.74
3,136	c	508	2.17	4.1x10 ⁴		0.10	0.19	b	0.14	0.29	2.17	1.0	2.17	0.74
3,223	c	508	1.75	1.3x10 ⁴		0.10	0.19	b	0.14	0.29	1.75	1.0	1.75	0.74

* Approximately 150°
 b. 25 film holders attached to aluminum stake.
 c. Approximately 270°

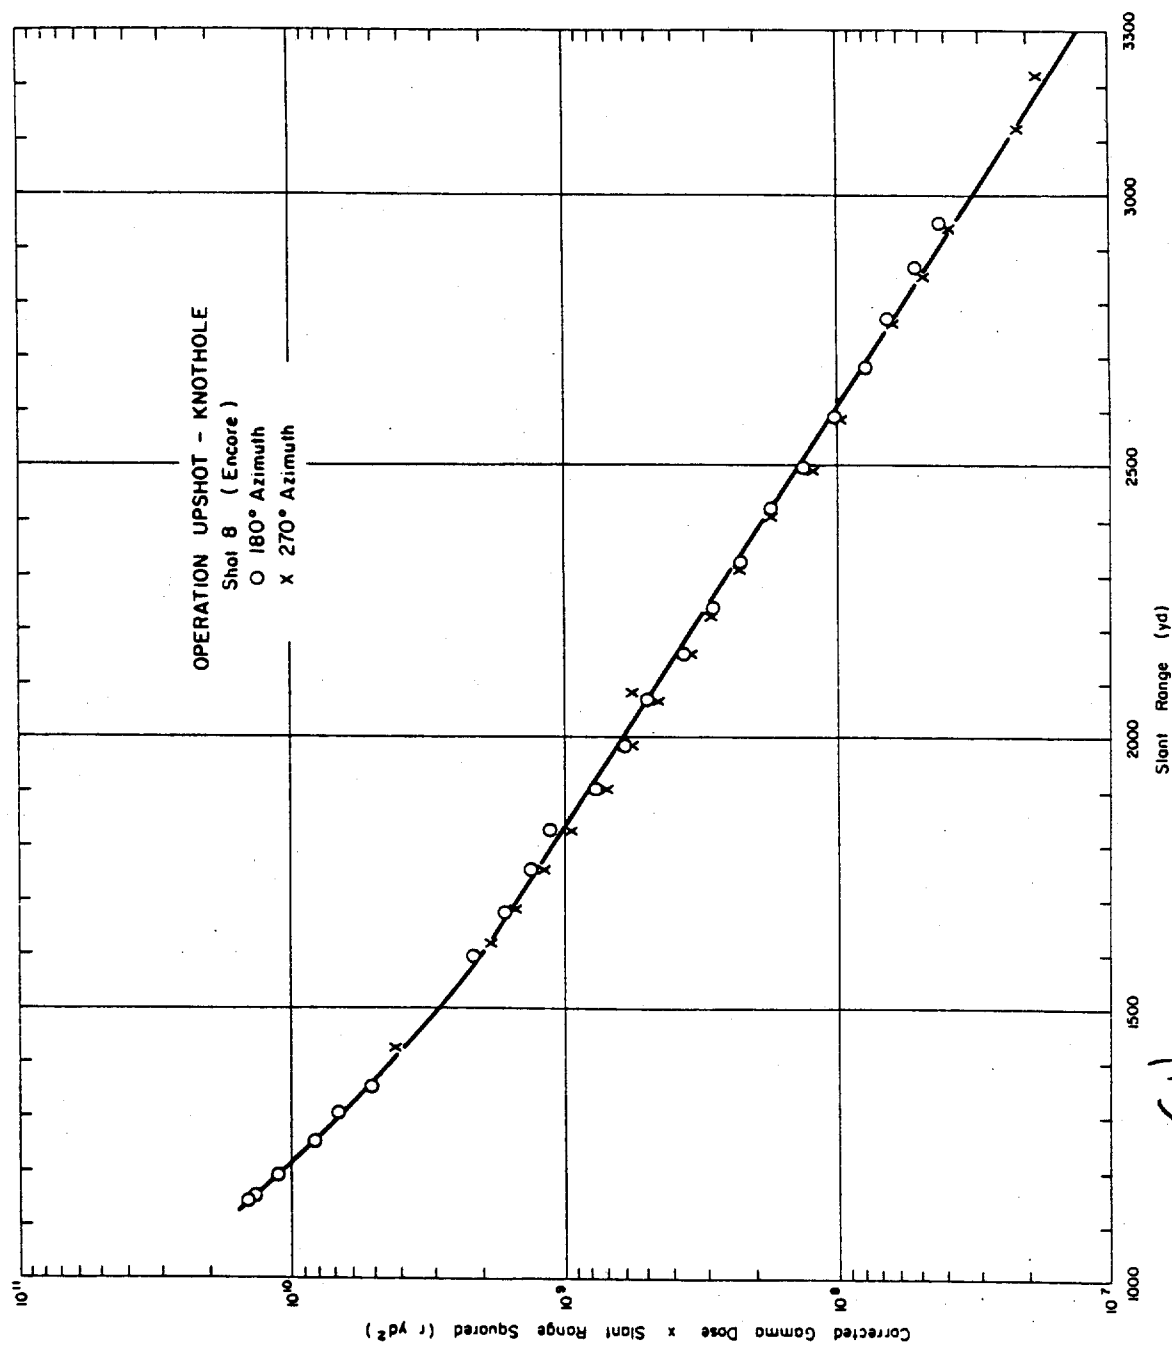


(u)

Figure 3.36 (SAD) Operation Upshot-Knothole - Shot 8 (Encore) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

TABLE 3.56 SEE INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 9 (HARRY)

Slant Range yd	Film Asimuth Type	Uncor- rected Gamma Dose	Neutron Flux										Soil Contribution		
			Au n/cm ²	Au											
				r	f	Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor		Final Corrected Gamma Dose	
906	A	548-0 10,000	1.5x10 ¹¹	17	150	b	2.1	169.1	9830	1.0	9830	1.0	9830	1.0	43
1,005	A	548-0 5,600	8.0x10 ¹⁰	9.1	79	b	1.2	89.3	5510	1.0	5510	1.0	5510	1.0	23
1,105	A	548-0 3,350	4.2x10 ¹⁰	4.8	45	b	0.60	50.4	3300	1.0	3300	1.0	3300	1.0	13
1,200	A	548-0 2,100	2.2x10 ¹⁰	2.5	25	b	0.40	27.9	2070	1.0	2070	1.0	2070	1.0	6.8
1,300	A	1290 1,400	1.1x10 ¹⁰	2.3	2.2	b	0.10	4.60	1400	1.0	1400	1.0	1400	1.0	3.5
1,500	A	1290 620	3.3x10 ⁹	0.67	0.66	b	<0.10	1.33	619	1.0	619	1.0	619	1.0	1.0
1,600	A	1290 392	1.7x10 ⁹	0.35	0.38	b	<0.10	0.73	391	1.0	391	1.0	391	1.0	0.50
1,700	A	1290 270	8.8x10 ⁸	0.18	0.19	b	<0.10	0.37	270	1.0	270	1.0	270	1.0	<0.50
1,800	A	1290 176	4.6x10 ⁸	0.10	0.11	b	<0.10	0.21	176	1.0	176	1.0	176	1.0	<0.50
1,900	A	606 128	2.4x10 ⁸	<0.10	<0.11	b	<0.10	<0.21	128	1.0	128	1.0	128	1.0	<0.50
2,000	A	606 90	1.3x10 ⁸	<0.10	<0.11	b	<0.10	<0.21	90	1.0	90	1.0	90	1.0	<0.50
2,100	A	606 60	6.7x10 ⁷	<0.10	<0.11	b	<0.10	<0.21	60	1.0	60	1.0	60	1.0	<0.50
2,200	A	606 43	3.5x10 ⁷	<0.10	<0.11	b	<0.10	<0.21	43	1.0	43	1.0	43	1.0	<0.50
2,300	A	606 33	1.8x10 ⁷	<0.10	<0.11	b	<0.10	<0.21	33	1.0	33	1.0	33	1.0	<0.50
2,400	A	510 22	9.4x10 ⁶	<0.10	<0.11	b	<0.10	<0.21	22	1.0	22	1.0	22	1.0	<0.50
2,500	A	510 16.6	5.0x10 ⁶	<0.10	<0.11	b	<0.10	<0.21	16.6	1.0	16.6	1.0	16.6	1.0	<0.50

*Unknown.
bBS film holders attached aluminum stake.

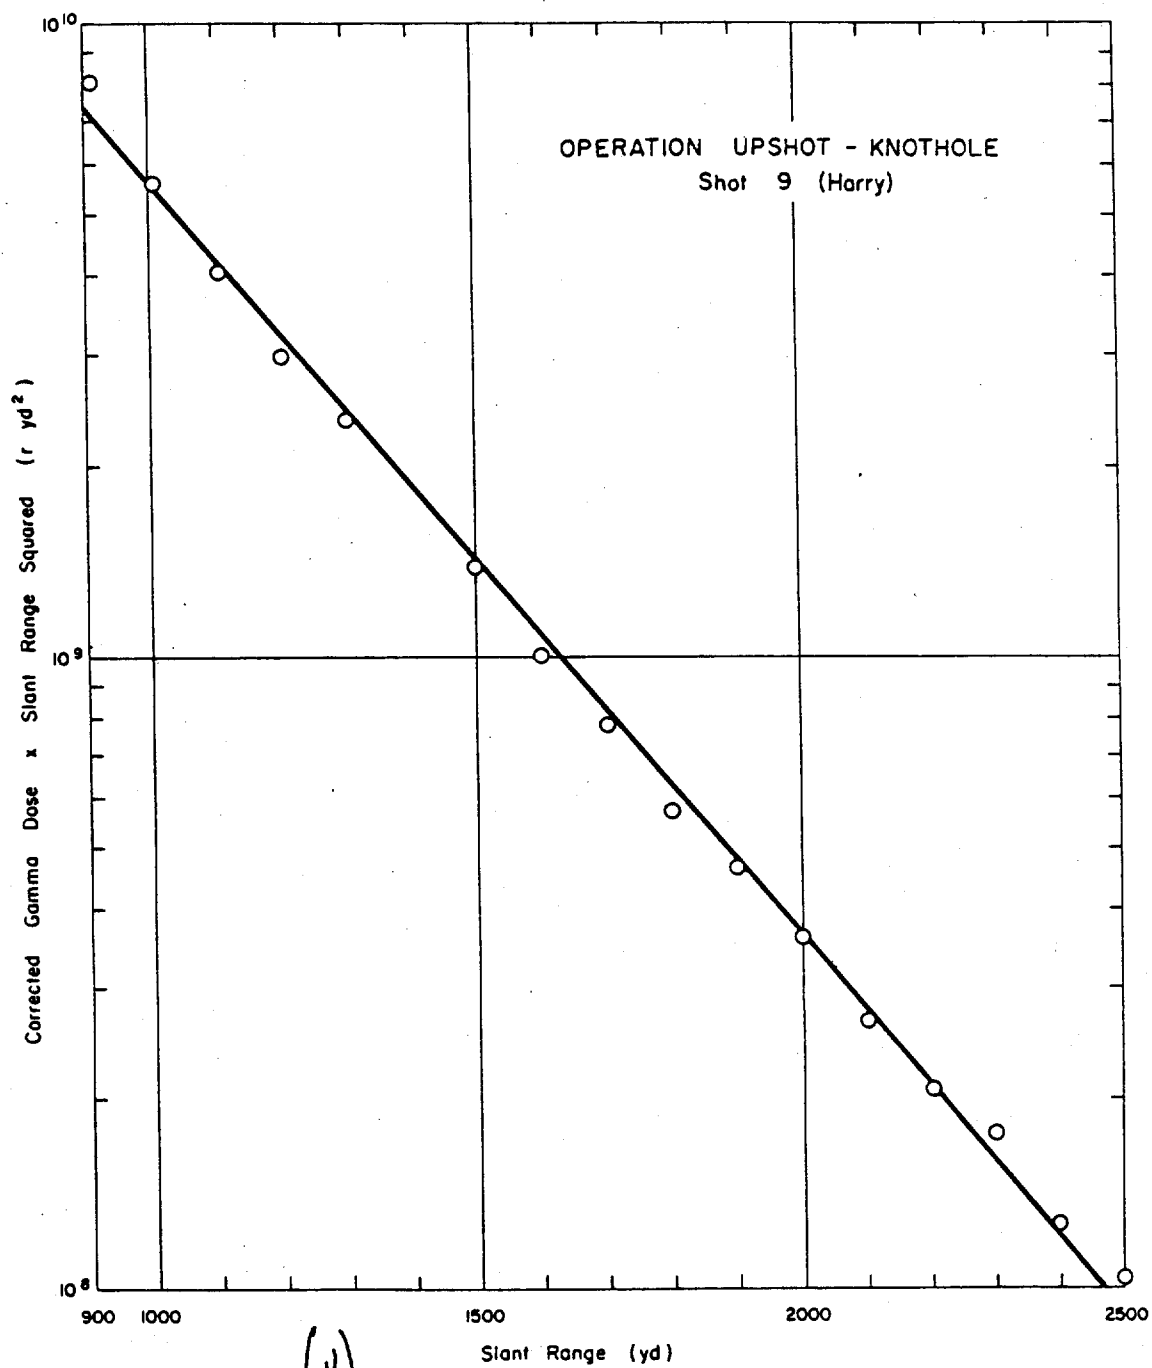

(V)
Figure 3.37 (S-RD) Operation Upshot-Knothole - Shot 9 (Harry) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

TABLE 3.2.1. JUEL INITIAL DATA BASE DATA - ORIENTATION UP-SHUT-KINEMOLE, SHOT 10 (UNABLE)

Slant Range	Azimuth	Film Type	Unexposed Gamma Dose	Neutron Flux		Thermal Correction	Fast Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma		Attenuation Factor	Final Gamma		Soil Contribution
				Au	n/cm ²						F	F		F	F	
yd																
889	a	548-0	7300		1.80x10 ¹²	205	1040	b	25.8	1270.8	6030	6030	1.0	6030	416	
907	a	548-0	4100		9.20x10 ¹¹	105	590	b	13.3	708.2	3390	3390	1.0	3390	220	
1,277	a	1290	820		1.30x10 ¹¹	27.0	17	b	1.88	49.08	774	774	1.0	774	35	
1,375	a	1290	500		7.00x10 ¹⁰	14.3	10	b	1.00	25.3	475	475	1.0	475	20	
1,475	a	1290	340		3.60x10 ¹⁰	7.35	5.5	b	0.51	13.36	327	327	1.0	327	10	
1,575	a	1290	228		1.90x10 ¹⁰	3.88	3.1	b	0.27	7.25	221	221	1.0	221	3.1	
1,671	a	1290	144		9.80x10 ⁹	2.00	1.8	b	0.14	3.94	140	140	1.0	140	1.8	
1,771	a	606	93		5.10x10 ⁹	1.16	0.64	b	0.073	1.87	91	91	1.0	91	1.8	
1,869	a	606	67		2.70x10 ⁹	0.61	0.36	b	0.039	1.01	66	66	1.0	66	0.90	
1,968	a	606	45		1.40x10 ⁹	0.32	0.21	b	<0.039	0.53	44	44	1.0	44	<0.90	
2,067	a	606	32		7.30x10 ⁸	0.16	0.12	b	<0.039	0.28	32	32	1.0	32	<0.90	
2,167	a	510	21		3.75x10 ⁸	0.040	0.095	b	<0.039	0.175	21	21	1.0	21	<0.90	
2,266	a	510	14.3		1.94x10 ⁸	0.021	0.055	b	<0.039	0.095	14.2	14.2	1.0	14.2	<0.90	
2,366	a	510	10.1		1.00x10 ⁸	0.021	0.030	b	<0.039	0.051	10.0	10.0	1.0	10.0	<0.90	
2,465	a	510	7.3		5.30x10 ⁷	<0.021	<0.030	b	<0.039	<0.051	7.3	7.3	1.0	7.3	<0.90	
2,565	a	508	4.6		2.72x10 ⁷	<0.021	<0.030	b	<0.039	<0.051	4.6	4.6	1.0	4.6	<0.90	
2,664	a	508	3.2		1.45x10 ⁷	<0.021	<0.030	b	<0.039	<0.051	3.2	3.2	1.0	3.2	<0.90	
2,764	a	508	2.4		7.55x10 ⁶	<0.021	<0.030	b	<0.039	<0.051	2.4	2.4	1.0	2.4	<0.90	
2,864	a	508	1.7		3.90x10 ⁶	<0.021	<0.030	b	<0.039	<0.051	1.7	1.7	1.0	1.7	<0.90	
908	c	548-0	6500		1.60x10 ¹²	182	920	b	22.9	1124.9	5380	5380	1.0	5380	360	
1,003	c	548-0	3900		8.20x10 ¹¹	93.2	530	b	11.7	634.9	3270	3270	1.0	3270	192	
1,292	c	1290	820		1.20x10 ¹¹	24.5	16	b	0.89	42.21	778	778	1.0	778	31	
1,392	c	1290	464		6.20x10 ¹⁰	12.7	8.0	b	0.47	21.59	462	462	1.0	462	17	
1,490	c	1290	320		3.20x10 ¹⁰	6.69	4.0	b	0.24	11.16	309	309	1.0	309	9.4	
1,590	c	1290	200		1.70x10 ¹⁰	3.47	2.8	b	0.13	6.51	193	193	1.0	193	5.2	
1,690	c	1290	134		8.60x10 ⁹	1.80	1.6	b	0.066	3.53	130	130	1.0	130	3.0	
1,786	c	606	69		4.60x10 ⁹	1.05	0.60	b	0.039	1.92	87	87	1.0	87	1.4	
1,886	c	606	40		2.40x10 ⁹	0.55	0.40	b	<0.039	0.984	59	59	1.0	59	0.71	
1,985	c	606	30		1.23x10 ⁹	0.26	0.20	b	<0.039	0.43	39	39	1.0	39	<0.71	
2,085	c	606	15		6.40x10 ⁸	0.15	0.15	b	<0.039	0.157	15	15	1.0	15	<0.71	
2,184	c	606	13		3.40x10 ⁸	0.077	0.08	b	<0.039	0.061	13	13	1.0	13	<0.71	
2,283	c	510	9.3		1.70x10 ⁸	0.037	0.04	b	<0.039	<0.061	9.3	9.3	1.0	9.3	<0.71	
2,383	c	510	7.2		9.20x10 ⁷	<0.037	<0.04	b	<0.039	<0.061	7.2	7.2	1.0	7.2	<0.71	
2,482	c	510	4.9		4.50x10 ⁷	<0.037	<0.04	b	<0.039	<0.061	4.9	4.9	1.0	4.9	<0.71	
2,581	c	510	3.1		2.30x10 ⁷	<0.037	<0.04	b	<0.039	<0.061	3.1	3.1	1.0	3.1	<0.71	
2,681	c	508	2.5		1.27x10 ⁷	<0.037	<0.04	b	<0.039	<0.061	2.5	2.5	1.0	2.5	<0.71	
2,780	c	508	1.8		6.70x10 ⁶	<0.037	<0.04	b	<0.039	<0.061	1.8	1.8	1.0	1.8	<0.71	
2,880	c	508	1.3		3.40x10 ⁶	<0.037	<0.04	b	<0.039	<0.061	1.3	1.3	1.0	1.3	<0.71	

*Approximately 180°.
This film holder attached to aluminum stake.
Approximately 2/0°.

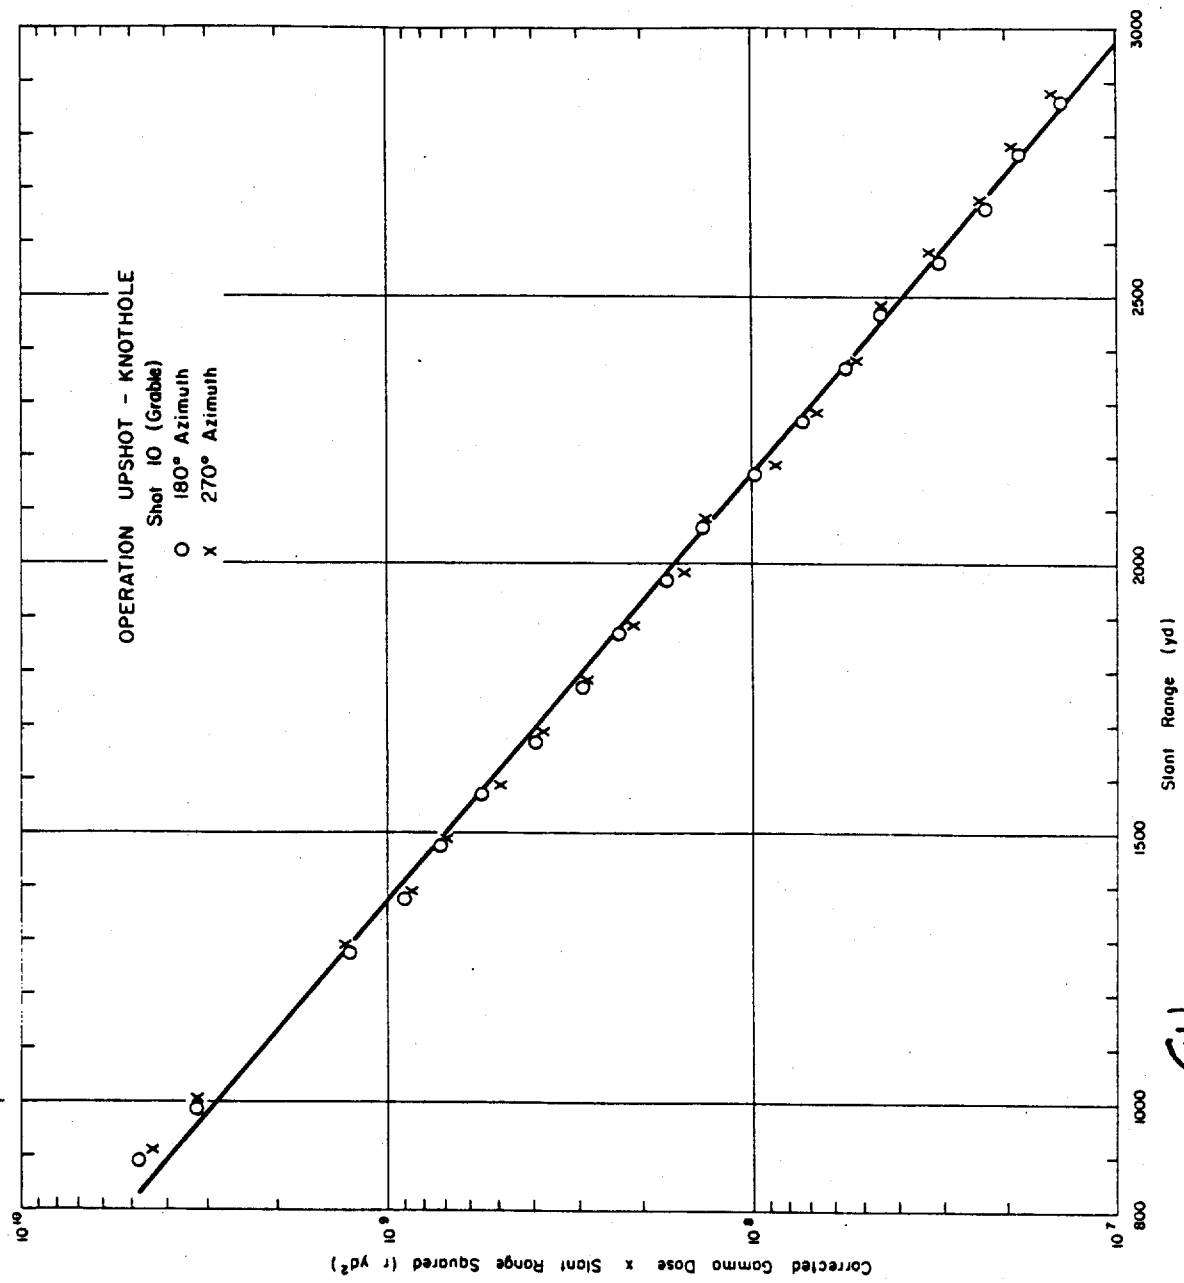


Figure 3.38 (S.M.) Operation Upshot-Knothole - Shot 10 (Grable) - Corrected gamma - dose-times-slant-range-squared versus slant-range (U).

(U)

TABLE 1.58 LASL INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 5

Slant Range	Azimuth	Film Type	Uncorrected Gamma Dose	Neutron Flux		Shield Type
				Au	n/cm ²	
yd			r			
300	a	1290	2180		7.89×10^{10} ^a	b
400	a	1290	79		1.77×10^{10} ^a	b
500	a	1290	355		6.11×10^9	b
600	a	1290	190		2.52×10^9	b
700	a	606	105		1.24×10^9	b
800	a	606	54		6.48×10^8	b
900	a	606	32		3.31×10^8	b
1,000	a	510	19		1.70×10^8	b
1,100	a	510	11		8.61×10^7	b
1,200	a	502	7.2		4.41×10^7	b
1,300	a	502	4.7		2.25×10^7	b
1,400	a	502	2.7		1.16×10^7	b
1,500	a	502	1.7		5.88×10^6	b
1,600	a	502	1.0		2.98×10^6	b
1,700	a	502	0.76		1.53×10^6	b
1,800	a	502	0.57		7.82×10^5	b
1,900	a	502	0.35		4.10×10^5	b
2,000	a	502	0.22		2.10×10^5	b

^a Unknown.^b Au film holder attached to angle-iron stake.

(u)

(S-60) TABLE 3-59 LAST INITIAL GAMMA DOSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 6

Slant Range	Azimuth	Film Type	Uncorrected Gamma Dose	Neutron Flux		Shield Type
				Au n/cm ²	ϕ	
yd						
1,400	A	1290	710	5.29×10^8		b
1,500	a	1290	487	2.94×10^8		b
1,600	a	1290	296	1.65×10^8		b
1,700	a	1290	209	9.09×10^7		b
1,800	a	1290	148	5.01×10^7		b
1,900	a	602	93	2.76×10^7		b
2,000	a	602	Lost	1.54×10^7		b
2,100	a	602	49	8.51×10^6		b
2,200	a	602	35	4.67×10^6		b
2,300	a	602	25	2.53×10^6		b
2,400	a	602	19	1.40×10^6		b
2,500	a	510	14	7.71×10^5		b
2,600	a	510	9.6	4.26×10^5		b
2,700	a	502	7.0	2.35×10^5		b
2,800	a	502	5.2	1.29×10^5		b
2,900	a	502	3.7	7.13×10^4		b
3,000	a	502	2.8	3.91×10^4		b
3,100	a	502	2.0	2.16×10^4		b
3,200	a	502	1.6	1.20×10^4		b
3,300	a	502	1.0	6.56×10^3		b
3,400	a	502	0.8	3.57×10^3		b
1,500	c	1290	452	2.94×10^8		b
1,600	c	1290	313	1.65×10^8		b
1,700	c	1290	218	9.09×10^7		b
1,800	c	1290	157	5.01×10^7		b
1,900	c	602	96	2.76×10^7		b
2,000	c	602	67	1.54×10^7		b
2,100	c	602	49	8.51×10^6		b
2,200	c	602	35	4.67×10^6		b
2,300	c	602	26	2.53×10^6		b
2,400	c	510	18	1.40×10^6		b
2,500	c	510	13	7.71×10^5		b
2,600	c	510	9.0	4.26×10^5		b
2,700	c	502	7.1	2.35×10^5		b
2,800	c	502	4.5	1.29×10^5		b
2,900	c	502	3.7	7.13×10^4		b
3,000	c	502	2.7	3.91×10^4		b
3,100	c	502	1.9	2.16×10^4		b
3,200	c	502	1.3	1.20×10^4		b
3,300	c	502	0.96	6.56×10^3		b

^a Approximately 3×10^5
has film holder attached to sample-ion stake.
^b Approximately 10^5

(10) TABLE 3.00 LASL INITIAL GAMMA RISE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 10

Slant Range	Azimuth	Film Type	Neutron Flux		Shield Type
			Uncorrected Gamma Dose	Au n/cm^2	
yd			r		
1,240	a	1290	1220	1.60×10^{11}	p
1,340	a	1290	490	8.30×10^{10}	p
1,440	a	1290	315	4.25×10^{10}	p
1,540	a	1290	210	2.60×10^{10}	p
1,640	a	1290	150	1.13×10^{10}	p
1,740	a	605	96	5.90×10^9	p
1,840	a	605	70	3.00×10^9	p
1,940	a	605	46	1.60×10^9	p
2,040	a	605	31	8.80×10^8	p
2,130	a	605	23.9	4.50×10^8	p
2,230	a	510	16.8	2.35×10^8	p
2,330	a	510	11.0	1.22×10^8	p
2,430	a	510	8.6	6.40×10^7	p
2,530	a	502	6.2	3.30×10^7	p
2,630	a	502	4.4	1.70×10^7	p
2,730	a	502	3.1	9.00×10^6	p
2,830	a	502	2.4	4.65×10^6	p
2,930	a	502	1.8	2.40×10^6	p
3,030	a	502	1.4	1.23×10^6	p
3,130	a	502	1.0	6.30×10^5	p
3,230	a	502	0.80	3.30×10^5	p
1,170	c	1290	1220	2.50×10^{11}	p
1,260	c	1290	775	1.40×10^{11}	p
1,360	c	1290	470	7.20×10^{10}	p
1,460	c	1290	310	3.70×10^{10}	p
1,560	c	1290	200	1.90×10^{10}	p
1,660	c	1290	140	1.00×10^{10}	p
1,760	c	605	96	5.20×10^9	p
1,860	c	605	65	2.70×10^9	p
1,960	c	605	44	1.40×10^9	p
2,060	c	605	30	7.30×10^8	p
2,160	c	605	23.0	3.70×10^8	p
2,260	c	510	16.4	1.90×10^8	p
2,360	c	510	12.0	1.00×10^8	p
2,460	c	502	7.0	5.20×10^7	p
2,560	c	502	5.6	2.70×10^7	p
2,660	c	502	4.1	1.40×10^7	p

2,660' N of North Line.
 2,660' N of North Line.
 2,660' N of South Line.

(u)


(S-40) TABLE 3.61 LASL INITIAL GAMMA POSE DATA - OPERATION UPSHOT-KNOTHOLE, SHOT 11

Slant Range	Altitude	Film Type	Uncorrected Gamma Dose	Neutron Flux		Shield Type
				Au	Total Fast Flux	
yd			r	n/cm ²	n/cm ²	
1,600		1290	895	b	b	c
1,700	a	1290	610	b	b	c
1,800	a	1290	450	b	b	c
1,900	a	1290	320	b	b	c
2,000	a	1290	245	b	b	c
2,100	a	1290	175	b	b	c
2,190	a	1290, 606	130	b	b	c
2,180	a	1290, 606	96	b	b	c
2,280	a	1290, 606	71	b	b	c
2,380	a	1290, 606	52	b	b	c
2,480	a	1290, 606	40	b	b	c
2,580	a	1290, 606	29	b	b	c
2,670	a	1290, 606	22	b	b	c
2,770	a	510	17	b	b	c
2,870	a	510	12	b	b	c
2,970	a	510	9.1	b	b	c
3,070	a	510, 502	6.8	b	b	c
3,170	a	510, 502	5.0	b	b	c
3,270	a	510, 502	3.8	b	b	c
3,370	a	510, 502	2.9	b	b	c
3,470	a	510, 502	2.1	b	b	c
3,570	a	502	1.7	b	b	c
3,680	a	502	1.2	b	b	c
3,780	a	502	0.96	b	b	c
3,880	a	502	0.8	b	b	c
3,980	a	502		b	b	c

*Unknown.

b: No neutron data available.

c: Au film holder attached to angle-iron stake.

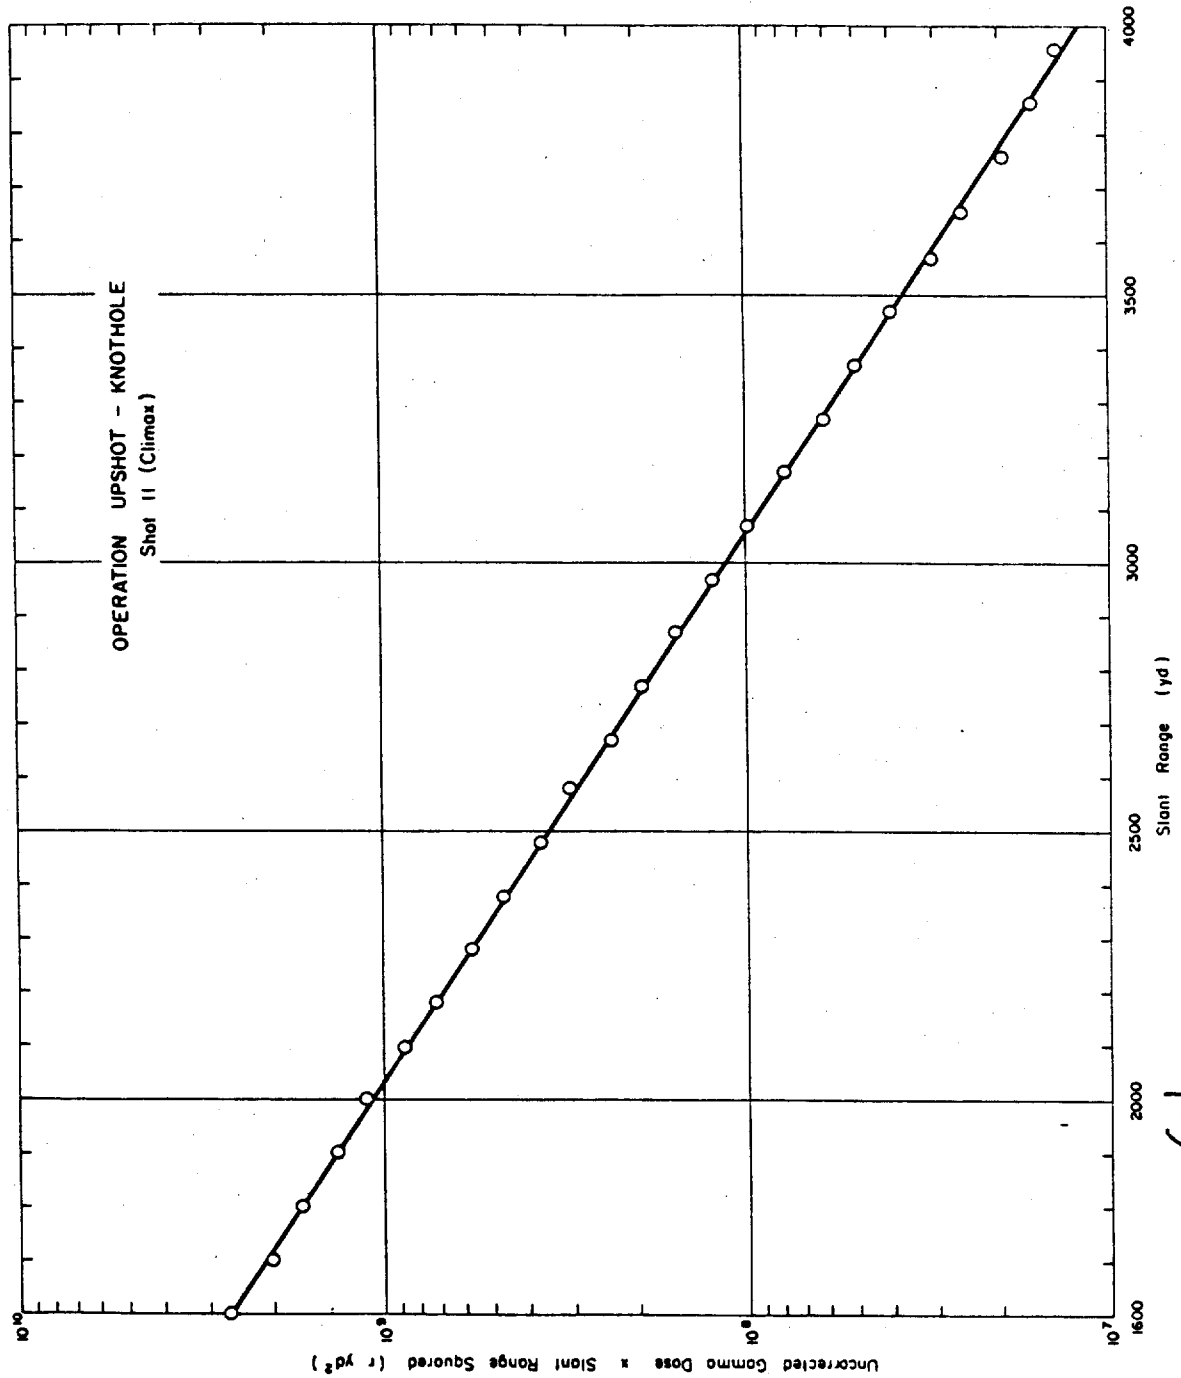

(U) Figure 3.39 (S-RD) Operation Upshot-Knothole - Shot II (Climax) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

(U) ~~(S-RO)~~ TABLE 3.62 SHOT INFORMATION - OPERATION CASTLE 540

Shot Designation	Date and Time Fired	Location and Type	Height of Burst	Total	HE Thickness
			ft	kt	cm
3 (Koon)	6 April 1954 1820:00 GMT	Bikini Tare-Surface Coral	13.6	150	a
4 (Union)	25 April 1954 1810:01 GMT	Bikini-Near Dog and Fox - Surface Barge	7	7.0×10^3	a
6 (Nectar)	13 May 1954 1820:00 GMT	Eniwetok-Ivy Mike Crater-Surface Barge	7	1.7×10^3	a

^a Not reported.


124

(U) TABLE 3.63 METEOROLOGICAL DATA - OPERATION CASTLE

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	p/ps	(ρ _s /ρ) ²
Koon	1009.7	300.2	1.18	0.91	1.21
Union	1007.4	300.2	1.17	0.90	1.23
Nectar	1006.4	299.7	1.17	0.90	1.23

TABLE 3.64 INITIAL GAMMA DOSE DATA - OPERATION CASTLE

Station Number	Location	Distance from GZ	Recovery Time	Detector Type	Total Exposure	Residual Radiation Rate at Time of Recovery	Calculated Residual Exposure	Estimated Initial Gamma Dose
		yd	hr		r	r/hr	r	r
Shot 3 (Moon)								
210.31	Roger Reef	2500	52	Film	22.2	0.003	1.2	21
210.30	Roger Reef	2500	52	Film	22.4	0.006	2.3	20
210.69	Roger Reef	2670	52	Film	14.2	0.006	2.3	12
210.68	Roger Reef	2450	52	Film	8.6	0.006	2.3	6.1
210.15	Easy	3400	104	Chem Dos	23,900	2.60	1200	22,100
Shot 6 (Rectus)								
210.73	Ella	1440	80	Chem Dos	400,000	4.20	3000	400,000
210.77	Daisy	2100	80	Chem Dos	34,800	0.250	150	34,650
210.76	Clara	2200	80	Chem Dos	1,800	0.210	125	1,700
210.79	Irene	3000	80	Chem Dos	600	0.055	40	600

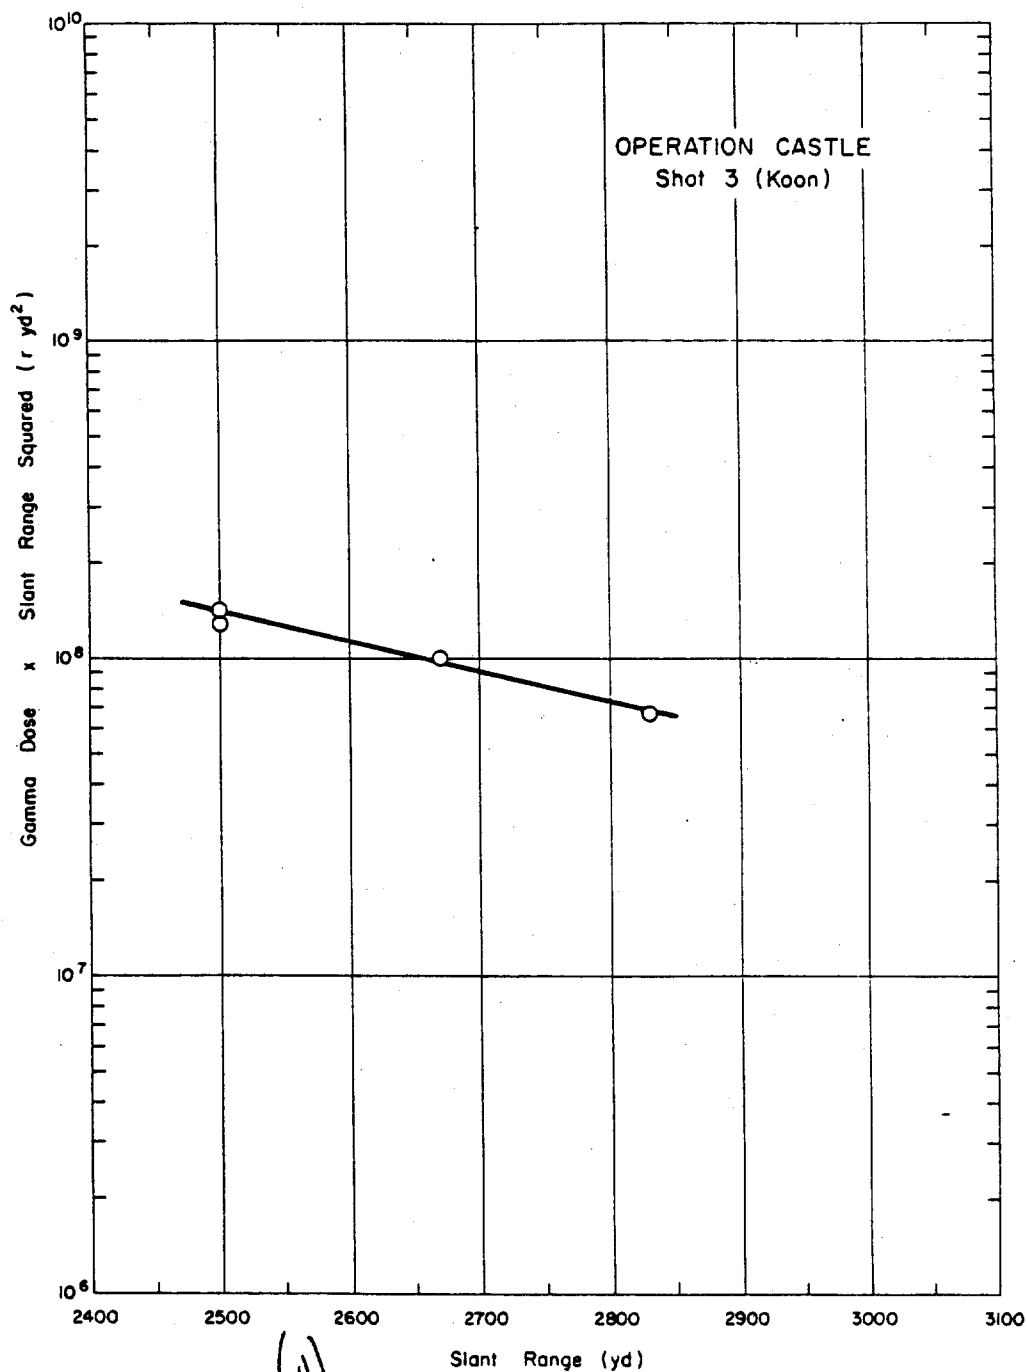

(U)
Figure 3.40 (S-RD) Operation Castle - Shot 3 (Koon) - Gamma-dose-times-slant-range-squared versus slant-range (U).

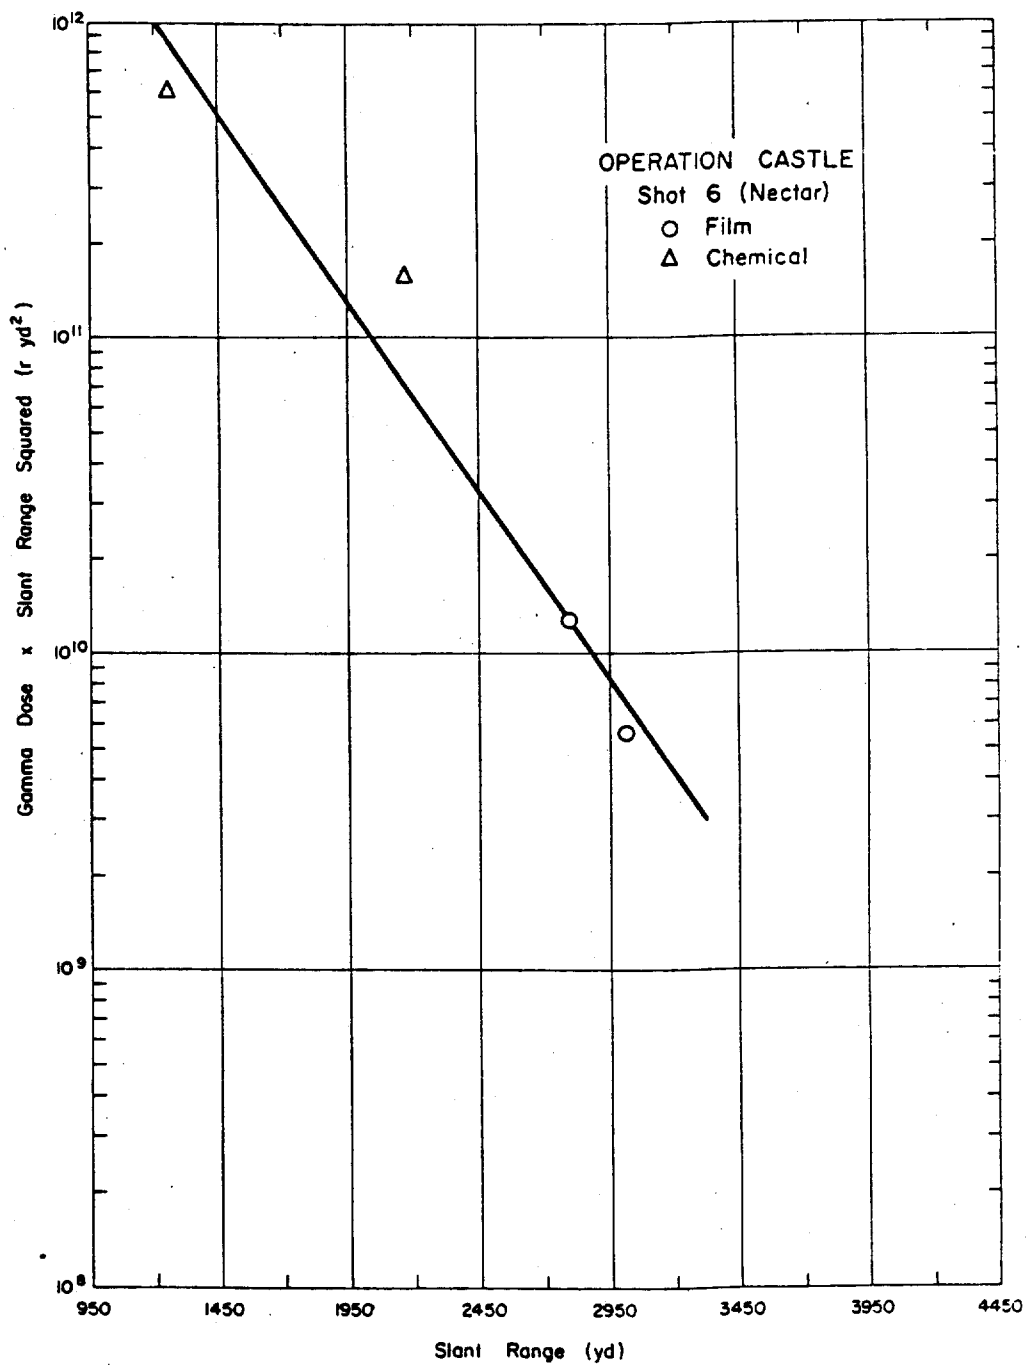


Figure 3.41 (S-RD) Operation Castle - Shot 6 (Nectar) - Gamma-dose-times-slant-range-squared versus slant-range (U).

(U)

(S) TABLE 3.65 SHOT INFORMATION - OPERATION TEAPOT

Shot Designation	Date and Time Fired	Location and Type	Height of Burst ft	Yield	
				Total	kt
1 (Wasp)	18 Feb 1955 1900 GMT	Area T-7-4-Air	762	1.2	
2 (Moth)	22 Feb 1955 1345 GMT	Area 3-Tower	300	2.4	
3 (Tesla)	1 March 1955 1330 GMT	Area 9A-Tower	300	6.8	
4 (Turk)	7 March 1955 1319:59 GMT	Area 2-Tower	500	44	
5 (Hornet)	12 March 1955 1255 GMT	Area 3A-Tower	300	3.6	
6 (Bee)	22 March 1955 1305 GMT	Area 7-1A-Tower	500	8.1	
8 (Apple I)	29 March 1955 1255 GMT	Area 4-Tower	500	14.2	
9 (Wasp Prime)	29 March 1955 1759:55 GMT	Area T-7-4-Air	740	3.2	
10 (High Altitude)	6 April 1955 1800:04 GMT	Area T-5-Air	36,620 (MSL)	3.1	
11 (Post)	9 April 1955 1230 GMT	Area 9C-Tower	300	1.45	
12 (Met)	15 April 1955 1915 GMT	F.P. - Tower ^b	400	22.5	
13 (Apple II)	5 May 1955 1210 GMT	Area 1-Tower	500	28	
14 (Zucchini)	15 May 1955 1159:59 GMT	Area 7-1A-Tower	500	28	

^a Not reported.^b Frenchman's Flat.

(11) TABLE 3.66 METEOROLOGICAL DATA - OPERATION TEAROT

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	ρ/ρ_0	$(\rho_0/\rho)^2$
1 (Wasp)	880 ^a 846 ^b	270 ^a 267.5 ^b	1.11	0.86	1.35
2 (Moth)	880 ^a 877 ^b	265.2 ^a 269.1 ^b	1.14	0.88	1.29
3 (Teale)	876 ^a 864 ^b	269.1 ^a 272.5 ^b	1.11	0.86	1.35
4 (Tusk)	868 ^a 855 ^b	278.2 ^a 278.6 ^b	1.08	0.83	1.45
5 (Hornet)	881 ^a 874 ^b	272 ^a 275 ^b	1.11	0.86	1.35
6 (Bee)	876 ^a 860 ^b	274 ^a 277.5 ^b	1.10	0.85	1.39
8 (Apple I)	867 ^a 852 ^b	282.1 ^a 282.3 ^b	1.06	0.82	1.49
9 (Wasp Prime)	871 ^a 845 ^b	286.4 ^a 285.4 ^b	1.04	0.80	1.56
11 (Foot)	874 ^a 867 ^b	274 ^a 277.5 ^b	1.10	0.85	1.39
12 (Net)	868 ^a 880 ^b	282.5 ^a 291.5 ^b	1.06	0.82	1.49
13 (Apple II)	871 ^a 855 ^b	280.5 ^a 288.6 ^b	1.05	0.81	1.53
14 (Zucchini)	866 ^a 851 ^b	276 ^a 275.1 ^b	1.09	0.84	1.42
15 (H.A.) at ground zero	882	283.3	Canister # 3 5 6 7 8	Density g/cm ³ x 10 ³ 0.341 0.341 0.339 0.339 0.338	Canister # 9 10 11 13 14 15 Density g/cm ³ x 10 ³ 0.336 0.334 0.334 0.324 0.312 0.302

^aGround condition.^bBurst height condition.

(13-60) TABLE 3-17 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 1 (WASP)

Slant Azi- Range multi- Type	Film Type	Uncor- rected Gamma Dose	Neutron Flux			Au			Shield			Total			Cor- rected			Final		
			r	c	n/cm ²	Au	Pu	Np	U	Type	Correc- tion	F	r	F	Dose	F	Dose	F	Dose	F
yd					n/cm ²	n/cm ²	n/cm ²	n/cm ²	n/cm ²											
290	a	548	43,000	2.93x10 ¹²	2.34x10 ¹²	1.25x10 ¹²	4.22x10 ¹²	4.22x10 ¹²	8.51x10 ¹²	b	b	560	5,362	34,103	1.0	34,103	3,350			
440	a	545	6,400	1.40x10 ¹²	6.70x10 ¹²	4.17x10 ¹²	4.17x10 ¹²	4.17x10 ¹²	8.51x10 ¹²	b	b	267	2,752	3,650	1.0	3,650	892			
799	a	1290	600	6.70x10 ¹²	4.60x10 ¹²	2.61x10 ¹²	5.34x10 ¹²	5.34x10 ¹²	1.00x10 ¹³	b	b	12.7	56.9	540	1.0	540	47			
887	a	606	335	3.50x10 ¹²	2.40x10 ¹²	1.53x10 ¹²	3.34x10 ¹²	3.34x10 ¹²	8.0	b	b	6.65	26.05	309	1.0	309	23			
976	a	606	215	2.20x10 ¹²	1.57x10 ¹²	9.44x10 ¹¹	3.15x10 ¹²	3.15x10 ¹²	5.14	b	b	7.41	16.85	198	1.0	198	16			
1,070	a	606	113	1.45x10 ¹²	8.77x10 ¹¹	4.82x10 ¹¹	1.75x10 ¹²	1.75x10 ¹²	3.30	b	b	4.30	10.19	132	1.0	132	8.6			
1,161	a	606	52	8.15x10 ¹¹	5.17x10 ¹¹	3.08x10 ¹¹	1.45x10 ¹²	1.45x10 ¹²	1.85	b	b	1.56	5.85	86	1.0	86	4.8			
1,255	a	606	32	4.84x10 ¹¹	2.80x10 ¹¹	1.62x10 ¹¹	6.37x10 ¹¹	6.37x10 ¹¹	1.10	b	b	0.32	3.34	57	1.0	57	2.7			
1,350	a	606	35	2.91x10 ¹¹	1.65x10 ¹¹	9.62x10 ¹⁰	3.85x10 ¹¹	3.85x10 ¹¹	0.66	b	b	0.55	1.94	33	1.0	33	1.6			
1,445	a	510	23	1.77x10 ¹¹	1.08x10 ¹¹	5.74x10 ¹⁰	2.37x10 ¹¹	2.37x10 ¹¹	0.38	b	b	0.34	2.04	21	1.0	21	1.0			
1,541	a	510	16	1.12x10 ¹¹	6.12x10 ¹⁰	3.46x10 ¹⁰	1.43x10 ¹¹	1.43x10 ¹¹	0.24	b	b	0.21	1.23	15	1.0	15	0.80			
1,638	a	510	12	7.09x10 ¹⁰	3.77x10 ¹⁰	2.09x10 ¹⁰	8.96x10 ¹⁰	8.96x10 ¹⁰	0.15	b	b	0.13	0.68	11	1.0	11	0.80			
1,833	a	502	5.5	2.96x10 ¹⁰	1.49x10 ¹⁰	8.06x10 ⁹	3.57x10 ¹⁰	3.57x10 ¹⁰	0.07	b	b	0.06	0.16	5.3	1.0	5.3	0.80			
2,029	a	502	2.65	1.21x10 ¹⁰	5.34x10 ⁹	3.10x10 ⁹	1.50x10 ¹⁰	1.50x10 ¹⁰	0.03	b	b	0.02	0.06	2.59	1.0	2.59	0.80			

*Unknown.

HBS film holder attached to stake.

(13-60) TABLE 3-18 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 2 (MOTH)

Slant Azi- Range multi- Type	Film Type	Uncor- rected Gamma Dose	Neutron Flux			Au			Shield			Total			Cor- rected			Final		
			r	c	n/cm ²	Au	Pu	Np	U	Type	Correc- tion	F	r	F	Dose	F	Dose	F	Dose	F
yd					n/cm ²	n/cm ²	n/cm ²	n/cm ²	n/cm ²											
412	a	548	9,600	3.88x10 ¹²	6.24x10 ¹²	4.18x10 ¹²	1.47x10 ¹³	1.47x10 ¹³	5.77x10 ¹²	b	b	790	4,081	5,520	1.0	5,520	1,100			
510	a	548	4,000	1.08x10 ¹²	3.50x10 ¹²	1.73x10 ¹²	5.77x10 ¹²	5.77x10 ¹²	2.54x10 ¹²	b	b	219	1,552	2,450	1.0	2,450	380			
906	a	606	1290	3.50x10 ¹²	1.83x10 ¹²	9.74x10 ¹¹	3.34x10 ¹²	3.34x10 ¹²	8.0	b	b	7.92	24,633	38,12	397	1.0	401,397	16		
1,005	a	606	290	2.02x10 ¹²	1.09x10 ¹²	5.00x10 ¹¹	1.79x10 ¹²	1.79x10 ¹²	4.73	b	b	4.38	13,68	15,80	264	1.0	266,264	7.1		
1,104	a	606	150	1.04x10 ¹²	5.82x10 ¹¹	2.79x10 ¹¹	4.18x10 ¹²	4.18x10 ¹²	2.30	b	b	1.82	6.04	7,82	149	1.0	149,148	4.7		
1,203	a	606	112	9.17x10 ¹¹	3.24x10 ¹¹	1.45x10 ¹¹	4.18x10 ¹²	4.18x10 ¹²	1.08	b	b	0.61	4.08	108	1.0	108	4.0			
1,302	a	606	75	3.00x10 ¹¹	1.85x10 ¹¹	8.52x10 ¹⁰	2.09x10 ¹²	2.09x10 ¹²	0.69	b	b	0.57	1.91	73	1.0	73	1.8			
1,402	a	606	45	1.67x10 ¹¹	1.07x10 ¹¹	4.72x10 ¹⁰	1.17x10 ¹²	1.17x10 ¹²	0.36	b	b	0.30	1.04	44	1.0	44	0.34			
1,502	a	510	25	1.07x10 ¹¹	5.66x10 ¹⁰	2.74x10 ¹⁰	6.46x10 ¹¹	6.46x10 ¹¹	0.28	b	b	0.24	0.72	24	1.0	24	0.34			
1,602	a	510	15	4.67x10 ¹⁰	3.15x10 ¹⁰	1.60x10 ¹⁰	3.50x10 ¹¹	3.50x10 ¹¹	0.10	b	b	0.088	0.599	15	1.0	15	0.34			
1,702	a	510	10.2	2.60x10 ¹⁰	1.40x10 ¹⁰	9.17x10 ⁹	1.94x10 ¹¹	1.94x10 ¹¹	0.57	b	b	0.049	0.170	10.7	1.0	10.7	0.34			
1,801	a	510	7.4	1.47x10 ¹⁰	8.06x10 ⁹	5.77x10 ⁹	1.47x10 ¹¹	1.47x10 ¹¹	0.32	b	b	0.037	0.086	7.3	1.0	7.3	0.34			
1,901	a	510	5.4	7.30x10 ⁹	4.06x10 ⁹	2.09x10 ⁹	8.96x10 ¹⁰	8.96x10 ¹⁰	0.07	b	b	0.015	0.030	3.0	1.0	3.0	0.34			
2,001	a	502	2.6	4.40x10 ⁹	2.09x10 ⁹	1.04x10 ⁹	4.18x10 ¹⁰	4.18x10 ¹⁰	0.03	b	b	0.015	0.030	3.0	1.0	3.0	0.34			

*Unknown.

HBS film holder attached to angle-iron stake.


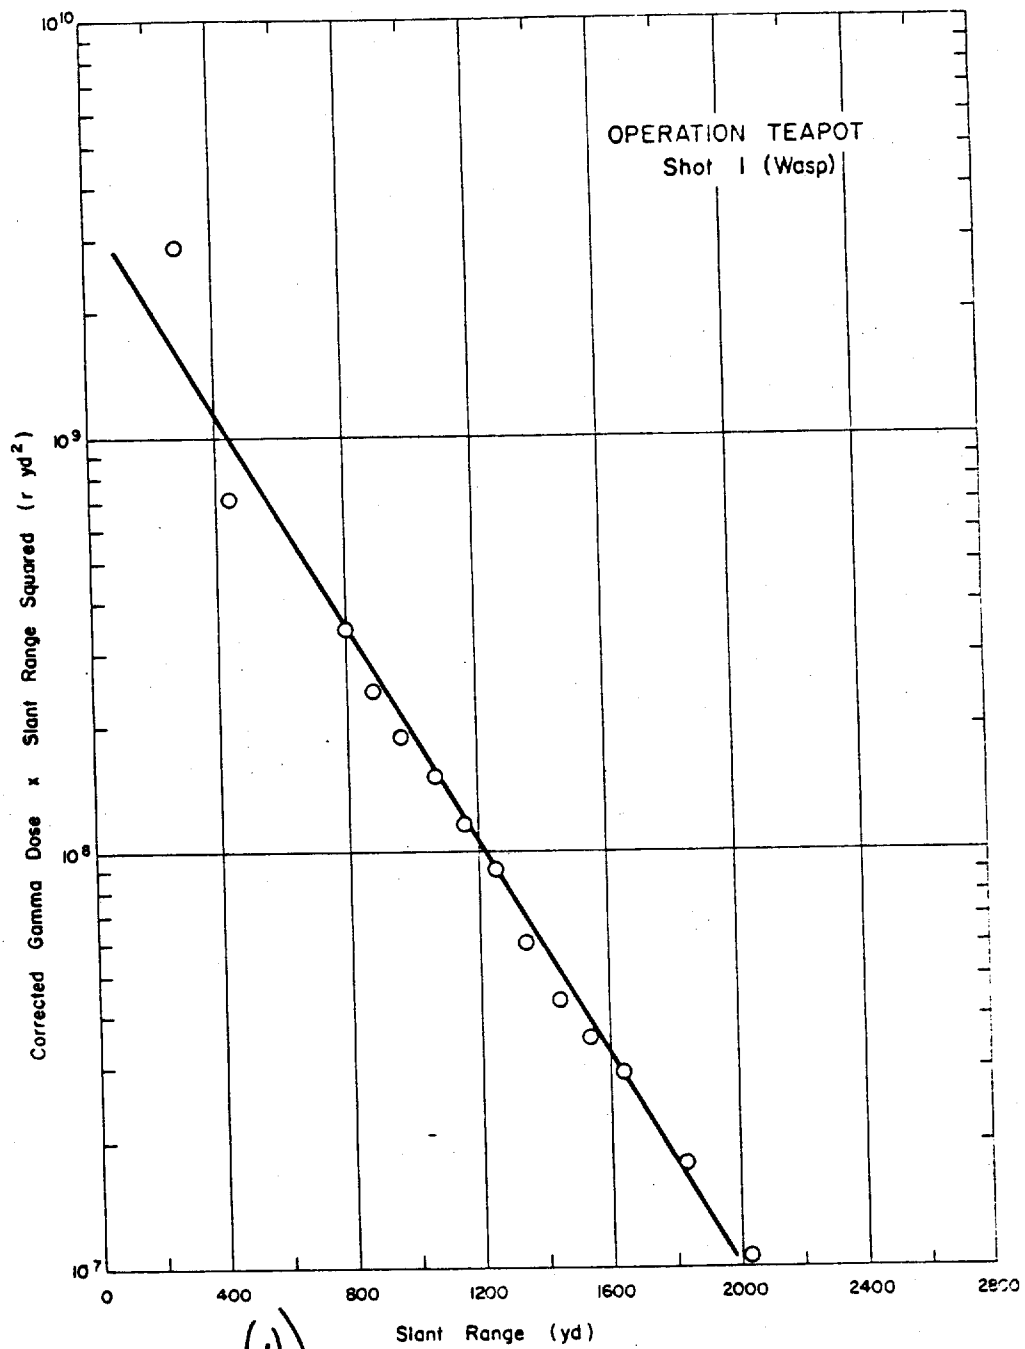


Figure 3.42 (U) Operation Teapot - Shot 1 (Wasp) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

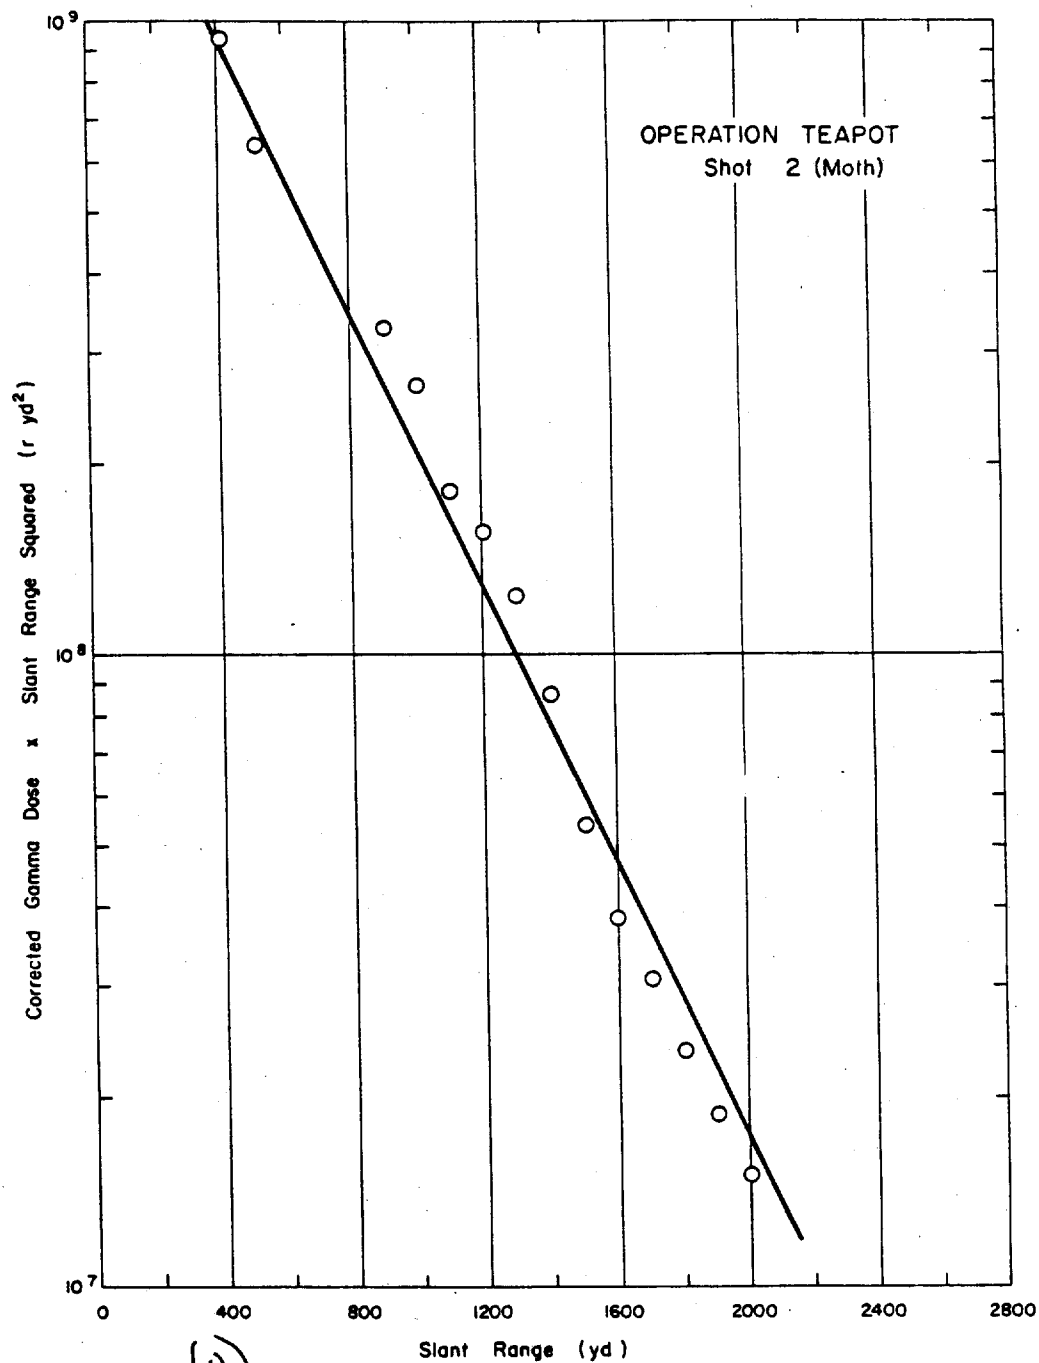

(U)
Figure 3.43 ~~(S-RD)~~ Operation Teapot - Shot 2 (Moth) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(U) TABLE 3.67 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 3 (TESLA)

Slant Range yd	Azi- math	File Type	Uncor- rected Gamma Dose		Neutron Flux		Au Thermal Correc- tion		Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose		Final Corrected Gamma Dose		Soil Contri- bution
			r	n/cm ²	r	n/cm ²	r	n/cm ²					r	n/cm ²			
511	a	548-0	19,500	7.66x10 ⁻¹²	870	870	870	870	4,500	b	1,460	6,830	12,700	1.0	12,700	1,780	
609	a	548-0	9,600	3.37x10 ⁻¹²	363	363	363	363	2,500	b	840	3,223	6,450	1.0	6,450	695	
715	a	548-0	4,400	1.45x10 ⁻¹²	165	165	165	165	1,100	b	576	1,541	2,160	1.0	2,160	366	
806	a	548-0	3,000	7.38x10 ⁻¹³	83.9	83.9	83.9	83.9	620	b	140	643.9	2,160	1.0	2,160	195	
1,145	a	1290	465	6.87x10 ⁻¹³	14.0	14.0	14.0	14.0	11	b	13.1	38.1	4.7	1.0	4.7	20	
1,230	a	606, 1290	310	4.04x10 ⁻¹³	9.18, 8.24	4.6, 7.2	4.6, 7.2	4.6, 7.2	11	b	7.67	21.45, 23.21	288, 287	1.0	288, 287	10	
1,316	a	606, 1290	205	2.31x10 ⁻¹³	5.25, 4.71	2.9, 4.6	2.9, 4.6	2.9, 4.6	1.8	b	4.39	12.54, 13.70	192, 191	1.0	192, 191	7.9	
1,404	a	606	135	1.37x10 ⁻¹³	1.73	1.73	1.73	1.73	0.89	b	2.60	7.51	127	1.0	127	4.6	
1,494	a	606	95	7.62x10 ⁻¹⁴	1.00	1.00	1.00	1.00	0.68	b	1.45	3.07	92	1.0	92	2.9	
1,585	a	606	63	4.38x10 ⁻¹⁴	0.56	0.56	0.56	0.56	0.31	b	0.83	2.51	60	1.0	60	1.6	
1,678	a	606	40	2.48x10 ⁻¹⁴	0.31	0.31	0.31	0.31	0.23	b	0.47	1.34	39	1.0	39	0.72	
1,771	a	510	25	1.43x10 ⁻¹⁴	0.31	0.31	0.31	0.31	0.23	b	0.27	0.91	24	1.0	24	0.31	

*Pu Flux = $\frac{Sf}{3} \times Pu \#11$

a -160° or 0° to weapon's linear axis.

b-SS file holder attached to angle-iron stake.

(U) TABLE 3.70 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 4 (TUNK)

Slant Range	Azimuth	File Type	Uncorrected Gamma Dose		Neutron Flux		Shield Type
			r	n/cm ²	Au n/cm ²	S n/cm ²	
1,519	a	1290	570	570	No data	No data	b
1,615	a	1290, 606	395	395	No data	No data	b
1,714	a	1290, 606	380	380	No data	No data	b
1,741	a	1290, 606	240	240	No data	No data	b
1,776	a	1290, 606	200	200	No data	No data	b
1,845	a	1290, 606	150	150	No data	No data	b
1,871	a	1290, 606	107	107	No data	No data	b
1,961	a	1290, 606	85	85	No data	No data	b
2,096	a	1290, 606	57	57	No data	No data	b
2,183	a	1290, 606	25	25	No data	No data	b
2,371	a	606, 510	15	15	No data	No data	b
2,460	a	10			No data	No data	b

Unknown.

b-SS file holder attached to angle-iron stake.


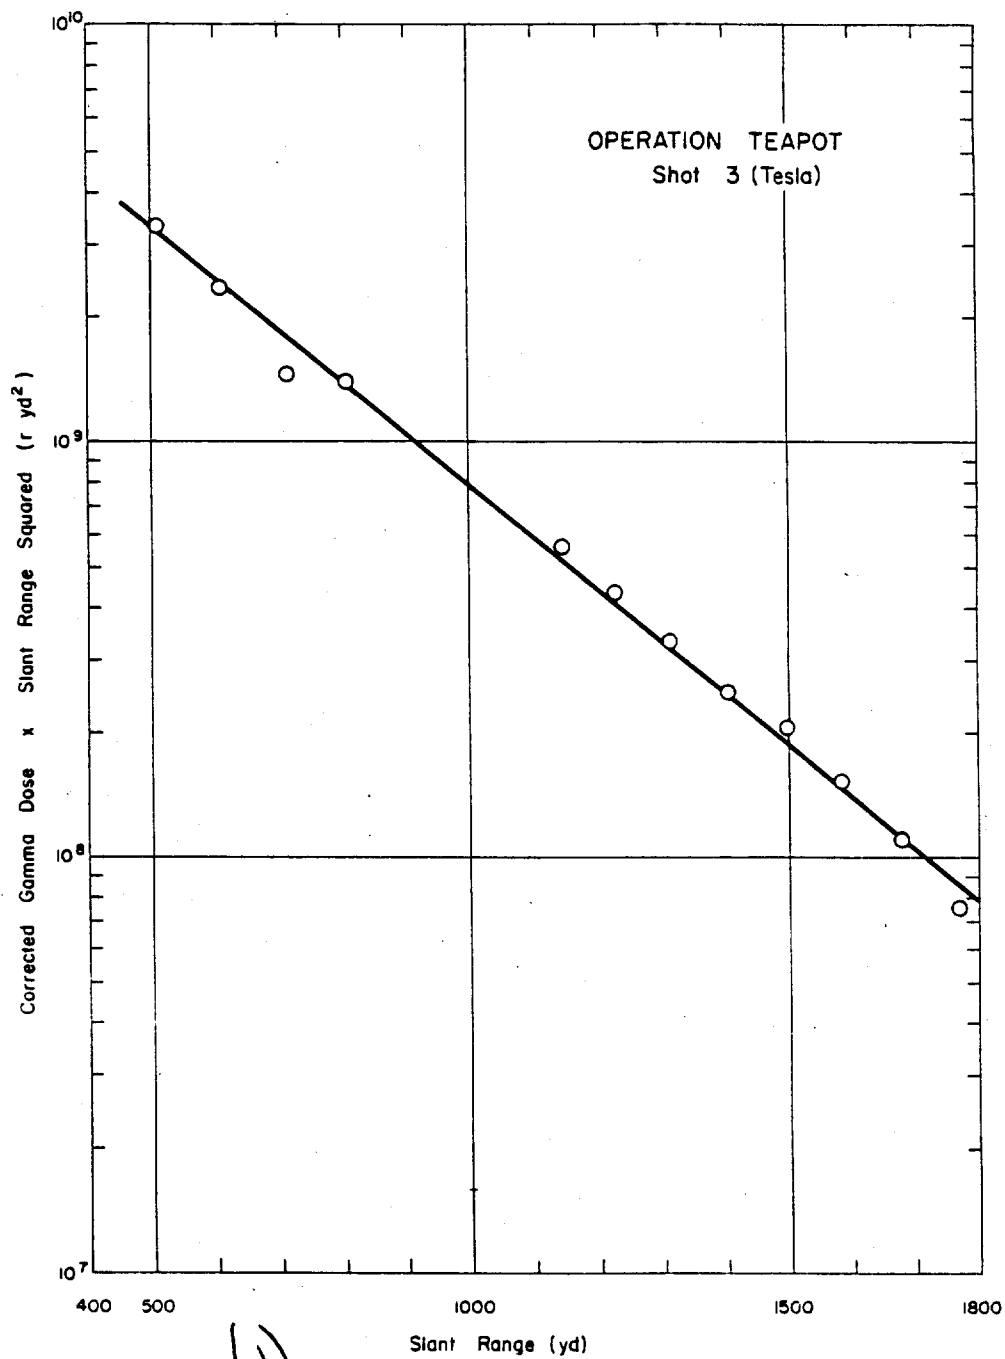


Figure 3.44 (S-3D) Operation Teapot - Shot 3 (Tesla) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

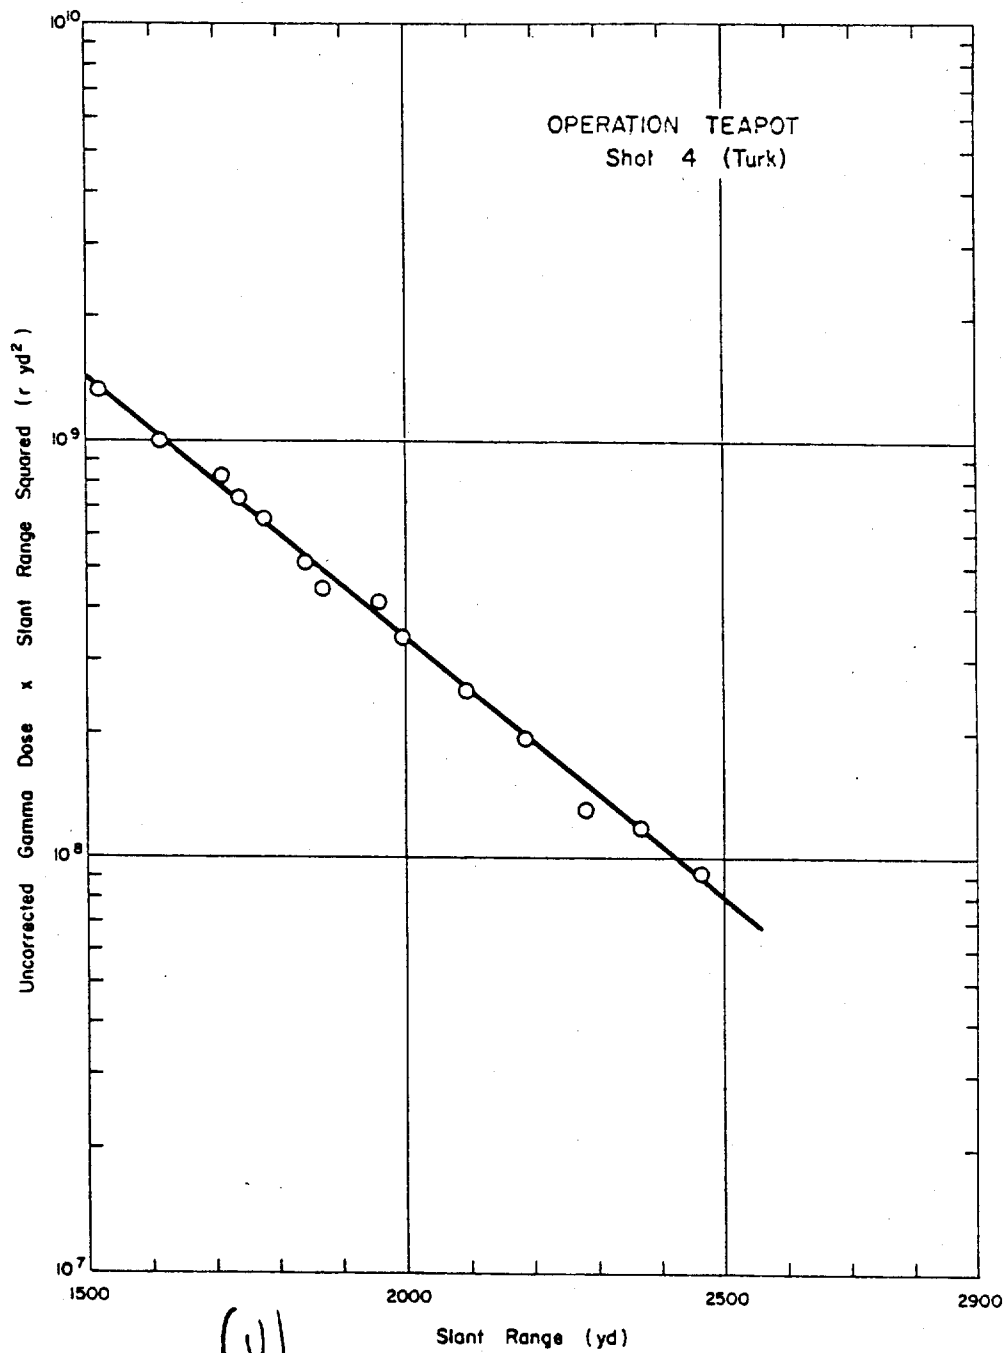

(U)
Figure 3.45 ~~(S-RD)~~ Operation Teapot - Shot 4 (Turk) - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

TABLE 3-71 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 6 (HSE)

Slant Azi. Film Range math Type	Uncor- rected Gamma Dose	Neutron Flux			Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Final Atten- uation Factor		Soil Contrib- ution
		Au	Pu	Hy							F	F	
yd		r	n/cm ²	n/cm ²	n/cm ²								
275	548-0	67,000	4.40x10 ¹²	6.61x10 ¹²	3.04x10 ¹²	1.84x10 ¹²			36,910	30,100	1.0	30,100	11,300
420	548-0	16,500	6.30x10 ¹²	1.48x10 ¹³	7.22x10 ¹²	4.15x10 ¹²			7,143	9,160	1.0	9,160	1,520
505	548-0	6,800	2.20x10 ¹²	7.00x10 ¹²	3.55x10 ¹²	1.95x10 ¹²			3,137	3,660	1.0	3,660	725
530	548-0	6,800	1.24x10 ¹²	4.40x10 ¹²	2.20x10 ¹²	1.27x10 ¹²			1,938	4,310	1.0	4,310	422
604	548-0	4,200	7.40x10 ¹¹	3.07x10 ¹²	1.57x10 ¹²	6.21x10 ¹¹			1,301.1	3,000	1.0	3,000	291
655	548-0	3,500	4.40x10 ¹¹	1.77x10 ¹²	9.20x10 ¹¹	3.60x10 ¹¹			98.7	2,550	1.0	2,550	167
922	548-0	1,020	5.05x10 ¹¹	2.12x10 ¹²	1.22x10 ¹²	4.60x10 ¹¹			11.1	37.5	1.0	37.5	23
1,035	548-0	550	5.05x10 ¹¹	1.84x10 ¹²	1.17x10 ¹²	3.90x10 ¹¹			10.9	36.2	1.0	36.2	18
1,094	548-0	320	3.60x10 ¹¹	1.40x10 ¹²	8.60x10 ¹¹	2.60x10 ¹¹			7.63	26.26	1.0	26.26	13
1,104	548-0	325	2.70x10 ¹¹	1.00x10 ¹²	6.30x10 ¹¹	3.10x10 ¹¹			6.14	19.19	1.0	19.19	9.4
1,153	548-0	245	1.90x10 ¹¹	7.40x10 ¹¹	4.80x10 ¹¹	2.30x10 ¹¹			4.52	13.22	1.0	13.22	7.0
1,203	548-0	187	1.45x10 ¹¹	5.72x10 ¹¹	3.50x10 ¹¹	1.80x10 ¹¹			3.05	9.31	1.0	9.31	5.2
1,303	548-0	125	8.00x10 ¹⁰	3.15x10 ¹¹	2.00x10 ¹¹	9.40x10 ¹⁰			1.64	5.58	1.0	5.58	2.7
1,402	548-0	79.0	4.42x10 ¹⁰	1.72x10 ¹¹	1.17x10 ¹¹	5.30x10 ¹⁰			0.82	2.86	1.0	2.86	1.6
1,502	548-0	45.0	2.43x10 ¹⁰	9.72x10 ¹⁰	6.00x10 ¹⁰	2.70x10 ¹⁰			0.50	1.43	1.0	1.43	0.85
1,602	548-0	30.0	1.30x10 ¹⁰	5.30x10 ¹⁰	3.00x10 ¹⁰	1.40x10 ¹⁰			0.31	0.78	1.0	0.78	0.45
1,701	548-0	21.0	7.90x10 ⁹	3.11x10 ¹⁰	2.30x10 ¹⁰	9.00x10 ⁹			0.17	0.46	1.0	0.46	0.25
1,801	548-0	15.0	4.57x10 ⁹	1.79x10 ¹⁰	1.30x10 ¹⁰	5.70x10 ⁹			0.10	0.264	1.0	0.264	0.15
1,901	548-0	10.0	2.63x10 ⁹	1.02x10 ¹⁰	8.30x10 ⁹	3.50x10 ⁹			0.057	0.148	1.0	0.148	0.08
2,000	548-0	7.0	1.53x10 ⁹	6.00x10 ⁹	5.00x10 ⁹	1.90x10 ⁹			0.040	0.099	1.0	0.099	0.05
2,100	548-0	5.0	8.80x10 ⁸	3.47x10 ⁹	2.90x10 ⁹	1.13x10 ⁹			0.022	0.017	1.0	0.017	0.05

Unknown.
HES film holder attached to stake.

TABLE 3-72 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 6 (HSE)

Slant Azi. Film Range math Type	Uncor- rected Gamma Dose	Neutron Flux			Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Final Atten- uation Factor		Soil Contrib- ution
		Au	Pu	Hy							F	F	
yd		r	n/cm ²	n/cm ²	n/cm ²								
527	548-0	30,500	7.55x10 ¹²	4.70x10 ¹²	2.01x10 ¹²	8.45x10 ¹¹			16,695	11,800	1.0	11,800	4,890
623	548-0	13,100	2.43x10 ¹²	2.10x10 ¹²	9.00x10 ¹¹	3.87x10 ¹¹			8,494	4,610	1.0	4,610	2,120
750	548-0	7,500	1.70x10 ¹²	1.04x10 ¹²	4.20x10 ¹¹	1.83x10 ¹¹			4,125	3,080	1.0	3,080	891
817	548-0	4,000	9.15x10 ¹¹	5.10x10 ¹¹	2.10x10 ¹¹	9.15x10 ¹⁰			2,036	1,900	1.0	1,900	450
915	548-0	2,100	4.60x10 ¹¹	2.51x10 ¹¹	1.03x10 ¹¹	4.70x10 ¹⁰			1,003	1,400	1.0	1,400	231
1,015	548-0	1,300	7.90x10 ¹⁰	3.07x10 ¹¹	1.45x10 ¹¹	6.20x10 ¹⁰			50.2	567	1.0	567	51
1,311	548-0	920	4.40x10 ¹⁰	1.90x10 ¹¹	7.50x10 ¹⁰	3.20x10 ¹⁰			27.41	30.70	1.0	30.70	15
1,410	548-0	240	2.40x10 ¹⁰	1.00x10 ¹¹	4.00x10 ¹⁰	1.60x10 ¹⁰			15.50	17.32	1.0	17.32	9.5
1,504	548-0	150	1.40x10 ¹⁰	5.70x10 ¹⁰	2.10x10 ¹⁰	8.70x10 ⁹			8.70	9.76	1.0	9.76	5.2
1,600	548-0	100	8.11x10 ⁹	3.00x10 ¹⁰	1.10x10 ¹⁰	5.00x10 ⁹			5.53	103	1.0	103	3.0
1,700	548-0	45	4.30x10 ⁹	1.60x10 ¹⁰	5.50x10 ⁹	2.50x10 ⁹			2.91	71	1.0	71	1.7
1,800	548-0	32	2.40x10 ⁹	9.70x10 ⁹	3.10x10 ⁹	1.40x10 ⁹			1.62	43	1.0	43	0.93
1,900	548-0	18	1.40x10 ⁹	5.70x10 ⁹	1.60x10 ⁹	7.00x10 ⁸			0.86	31	1.0	31	0.33
2,000	548-0	11	8.00x10 ⁸	3.40x10 ⁹	9.00x10 ⁸	4.00x10 ⁸			0.59	17	1.0	17	0.15
2,100	548-0	7	4.60x10 ⁸	1.90x10 ⁹	5.00x10 ⁸	2.00x10 ⁸			0.34	14	1.0	14	0.09
2,200	548-0	4	2.60x10 ⁸	1.00x10 ⁹	2.90x10 ⁸	1.10x10 ⁸			0.23	11	1.0	11	0.05
2,300	548-0	3	1.40x10 ⁸	5.00x10 ⁸	1.40x10 ⁸	5.00x10 ⁷			0.11	8.2	1.0	8.2	0.03
2,400	548-0	2	8.00x10 ⁷	3.00x10 ⁸	8.00x10 ⁷	3.00x10 ⁷			0.11	6.7	1.0	6.7	0.03
2,500	548-0	1	4.60x10 ⁷	1.60x10 ⁸	4.60x10 ⁷	1.60x10 ⁷			0.11	5.2	1.0	5.2	0.03
2,600	548-0	1	2.60x10 ⁷	9.00x10 ⁷	2.60x10 ⁷	9.00x10 ⁶			0.11	4.7	1.0	4.7	0.03
2,700	548-0	1	1.40x10 ⁷	5.00x10 ⁷	1.40x10 ⁷	5.00x10 ⁶			0.11	3.7	1.0	3.7	0.03
2,800	548-0	1	8.00x10 ⁶	3.00x10 ⁷	8.00x10 ⁶	3.00x10 ⁶			0.11	3.2	1.0	3.2	0.03
2,900	548-0	1	4.60x10 ⁶	1.60x10 ⁷	4.60x10 ⁶	1.60x10 ⁶			0.11	2.7	1.0	2.7	0.03
3,000	548-0	1	2.60x10 ⁶	9.00x10 ⁶	2.60x10 ⁶	9.00x10 ⁵			0.11	2.3	1.0	2.3	0.03

Unknown.
HES film holder attached to stake.

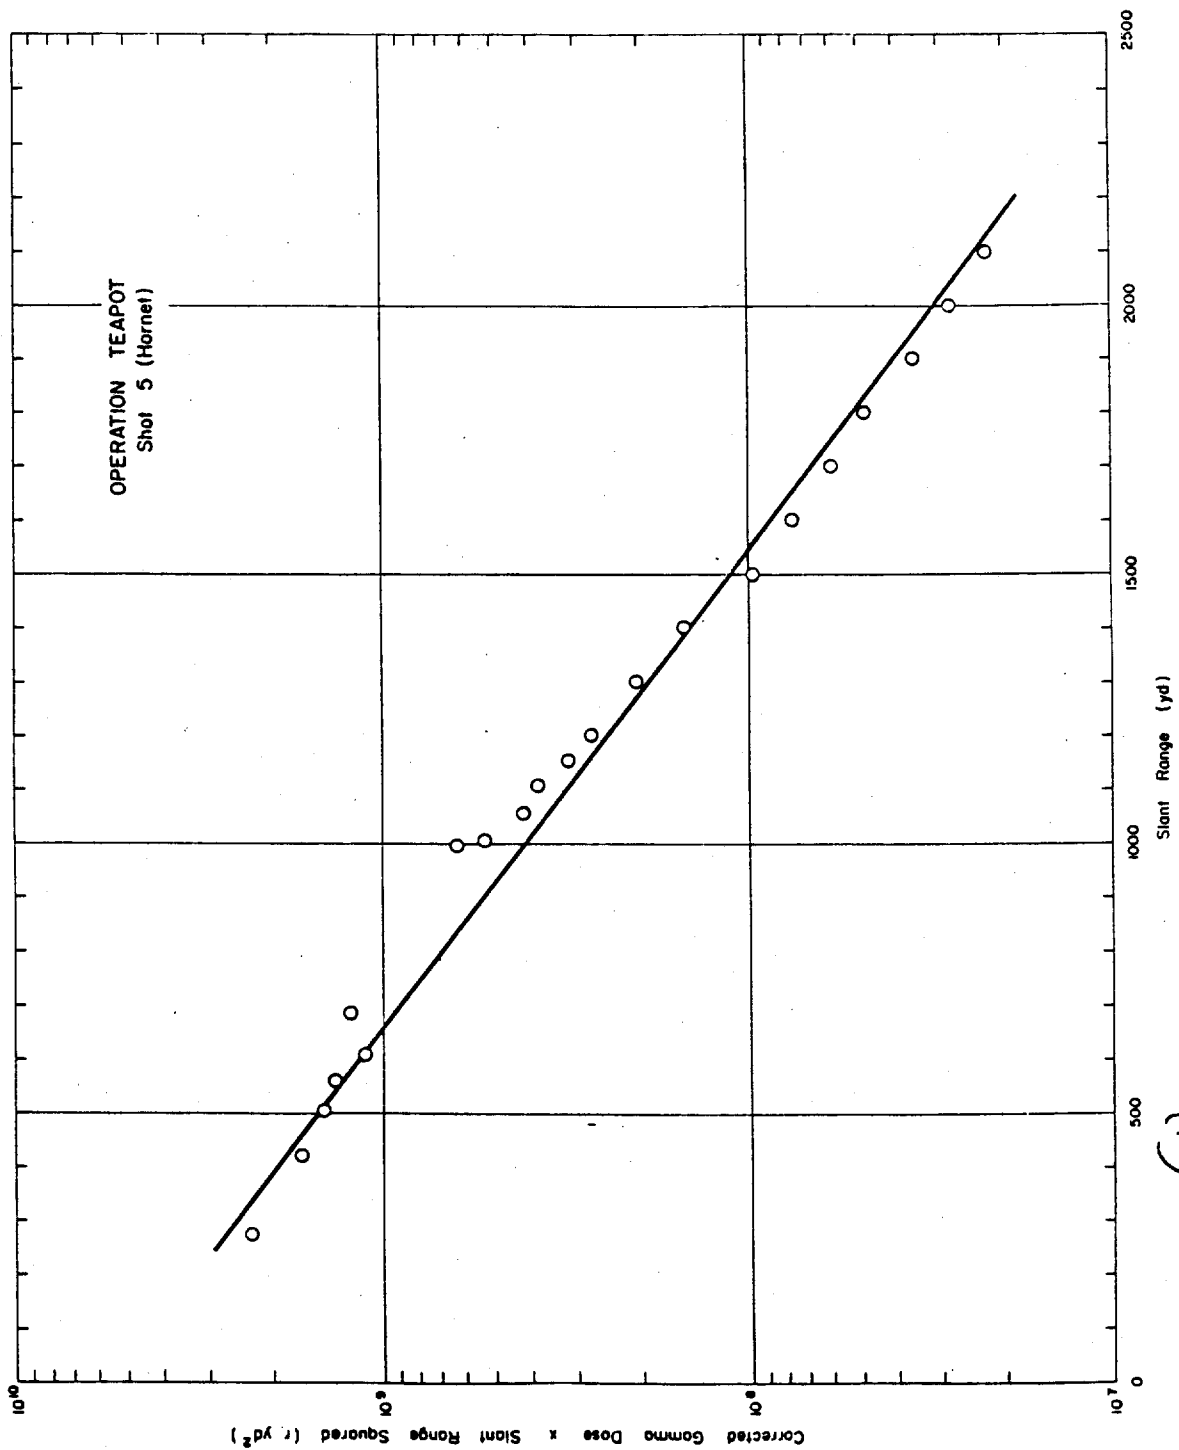


Figure 3.46 (U) Operation Teapot - Shot 5 (Hornet) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

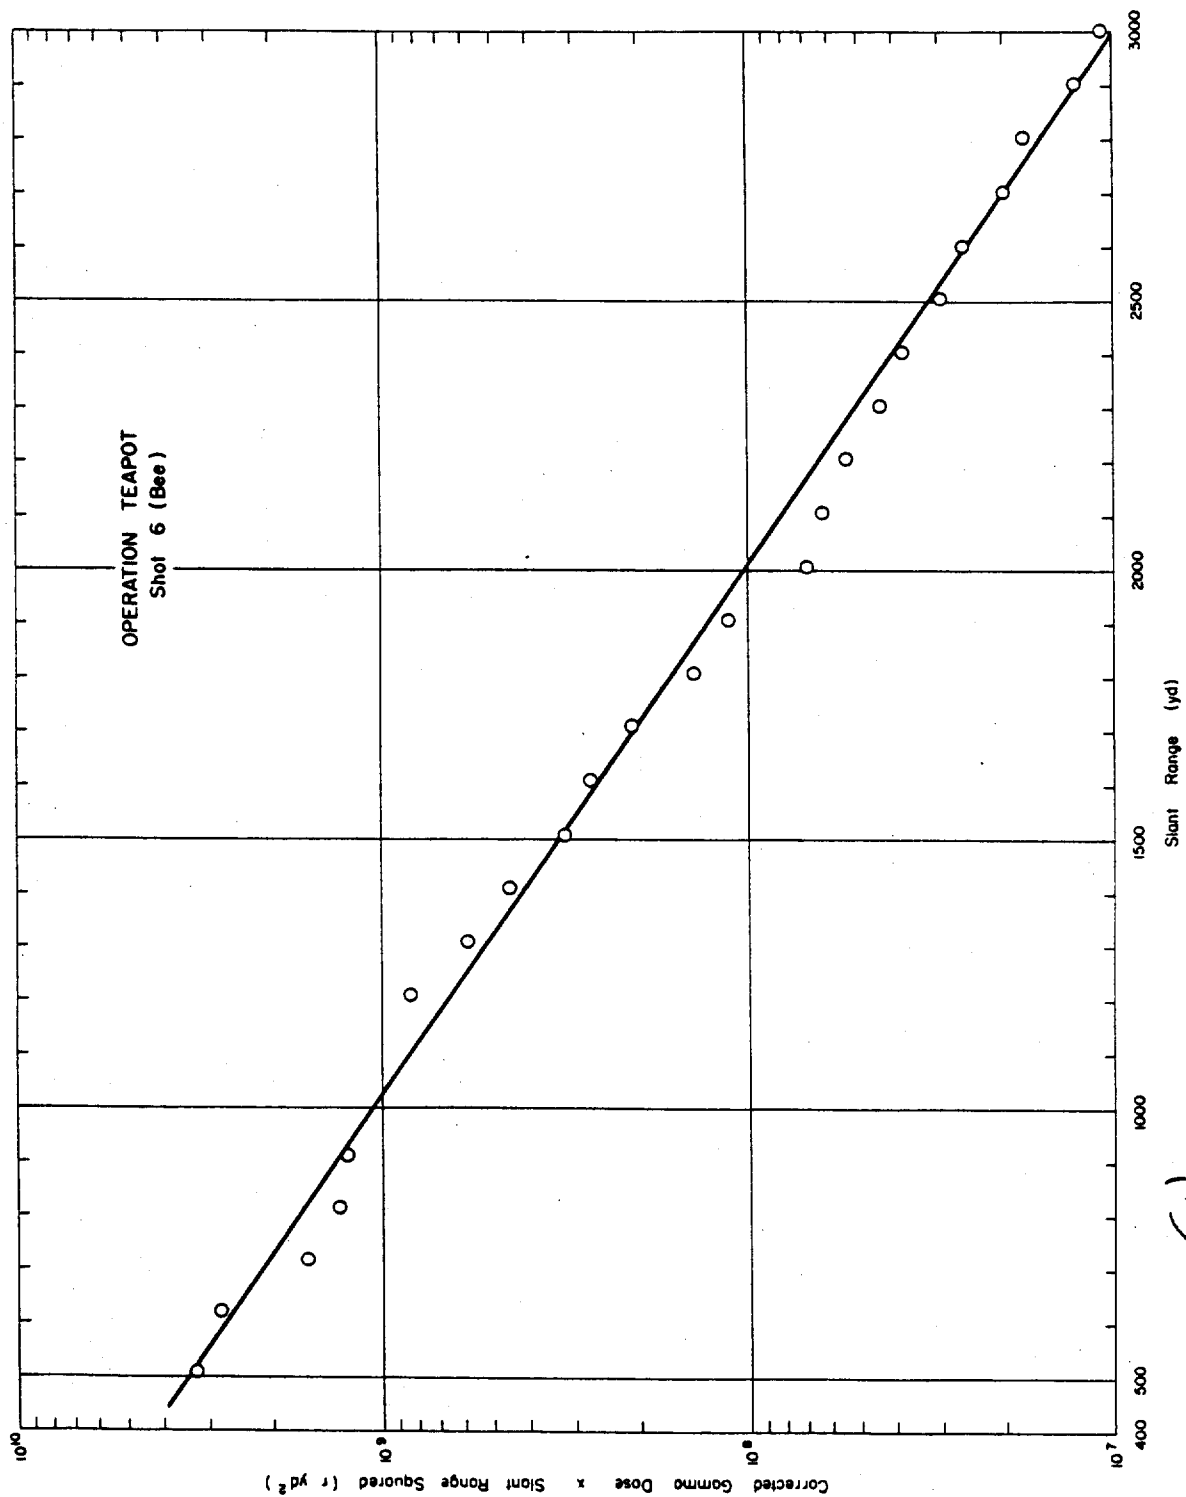


Figure 3.47 (S-RR) Operation Teapot - Shot 6 (Bee) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(10) TABLE 3.73 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 9 (APPLE 1)

Slant Azi- Range math	Film Type	Unrec- rected Gamma Dose	Neutron Flux		Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Corrected Atten- uation Factor		Final Contri- bution	
			Au	n/cm^2					F	F	F	F
yd												
1,410	a	1290	347	7.39×10^6	6.3	b	1.4	9.21	338	1.0	338	7.4
1,509	a	1290	225	4.12×10^6	5.2	b	0.79	6.83	218	1.0	218	5.3
1,600	a	1290	147	2.46×10^6	3.9	b	0.45	4.93	142	1.0	142	3.2
1,705	a	606	100	1.34×10^6	1.8	b	0.26	2.36	98	1.0	98	1.7
1,836	a	606	67	7.69×10^5	1.2	b	0.14	1.51	65	1.0	65	1.2
1,958	a	606	25	5.80×10^5	0.96	b	0.11	1.30	54	1.0	54	<1.2
1,968	a	606	47	4.04×10^5	0.73	b	0.06	0.91	46	1.0	46	<1.2
1,958	a	606	39	3.31×10^5	0.62	b	0.06	0.76	38	1.0	38	<1.2
2,007	a	606	32	2.56×10^5	0.46	b	0.04	0.57	31	1.0	31	<1.2
2,057	a	510	24	1.97×10^5	0.39	b	0.03	0.47	23	1.0	23	<1.2
2,107	a	510	20	1.49×10^5	0.31	b	0.02	0.37	20	1.0	20	<1.2
2,200	a	1290, 606, 16, 14, 9.07	12	9.07×10^4	0.28	b	0.02	0.32	12	1.0	12	<1.2
2,400	a	510, 502	9, 7.6	3.13×10^7	0.007	b	0.006	0.133	9, 7.6	1.0	9, 7.6	<1.2
2,500	a	510, 502	5, 4.2	1.15×10^7	<0.007	b	<0.006	<0.133	5, 4.2	1.0	5, 4.2	<1.2
2,600	a	510, 502	2.8, 2.3	4.08×10^6	<0.007	b	<0.006	<0.133	2.8, 2.3	1.0	2.8, 2.3	<1.2
3,000	a	510, 502	1.6, 1.5	1.47×10^6	<0.007	b	<0.006	<0.133	1.6, 1.5	1.0	1.6, 1.5	<1.2
3,300	a	502	0.82	3.35×10^5	<0.007	b	<0.006	<0.133	0.82	1.0	0.82	<1.2


Unknown.
BUS film holder attached to stake.

(11) TABLE 3.74 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT 9 (WASP PRIME)


Slant Azi- Range math	Film Type	Unrec- rected Gamma Dose	Neutron Flux		Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Contri- bution	
			Au	n/cm^2							F	F
yd												
280	a	72,000	3.50×10^3	1.12×10^4	1.080	c	1.080	26,390	45,600	1.05	47,900	20,400
380	a	25,400	1.31×10^3	4.44×10^3	0.670	c	0.670	9,041	17,400	1.05	19,300	6,900
460	a	19,000	7.51×10^2	2.22×10^3	5,600	c	5,600	5,234	8,780	1.05	14,220	3,700
520	a	10,000	3.91×10^2	1.43×10^3	2,600	c	2,600	2,711	7,240	1.05	7,660	1,890
600	a	5,700	1.90×10^2	7.53×10^2	1,270	c	1,270	1,241	3,880	1.05	4,090	928
710	a	3,000	8.72×10^1	4.34×10^2	580	c	580	64.8	3,083	1.05	3,150	416
835	a	1,500	2.21×10^1	1.54×10^2	113	c	113	151.86	1,530	1.05	1,640	184
945	a	690	1.70×10^1	7.82×10^1	80.0	c	80.0	4.84	117.84	1.05	121	81.4
1,045	a	600	1.21×10^1	6.01×10^1	58.0	c	58.0	3.41	81.41	1.05	84.8	61.2
1,100	a	400	8.70×10^0	4.43×10^1	41.3	c	41.3	2.48	60.48	1.05	62.9	44.0
1,154	a	290	6.21×10^0	3.31×10^1	10.3, 9.20	d	7.12, 11.1	1.76	43.06	1.05	44.8	31.6
1,252	a	1200, 606	2.40×10^0	1.27×10^1	5.57, 5.00	d	3.97, 6.05	0.36	14.65	1.05	15.0	10.5
1,349	a	1000, 606	1.50×10^0	7.03×10^0	3.11, 2.80	d	2.61, 3.35	0.25	8.12	1.05	8.37	5.60
1,444	a	600	7.62×10^0	3.86×10^0	1.73	d	1.21	1.05	4.59	1.05	5.64	3.60
1,546	a	400	4.43×10^0	2.21×10^0	1.00	d	0.48	0.25	1.51	1.05	2.51	2.01
1,646	a	200	2.40×10^0	1.27×10^0	0.50	d	0.25	0.25	0.86	1.05	1.11	1.00
1,744	a	200	1.40×10^0	6.97×10^0	0.40	d	0.25	0.25	0.69	1.05	0.74	0.60
1,844	a	510	8.09×10^0	4.07×10^0	0.07, 0.06	d	0.17	0.15	0.59	1.05	0.64	0.50
1,943	a	500	5.10×10^0	2.55×10^0	0.05, 0.02	d	0.08, 0.04	0.05	0.40	1.05	0.44	0.30
2,043	a	510	3.10×10^0	1.54×10^0	0.03, 0.02	d	0.03, 0.03	0.03	0.25	1.05	0.28	0.20
2,143	a	500	2.40×10^0	1.27×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.16	1.05	0.17	0.10
2,243	a	500	1.50×10^0	7.03×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.10	1.05	0.11	0.08
2,343	a	500	8.09×10^0	4.07×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.08	1.05	0.09	0.07
2,443	a	500	5.10×10^0	2.55×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.06	1.05	0.07	0.05
2,543	a	500	3.10×10^0	1.54×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.04	1.05	0.05	0.04
2,643	a	500	2.40×10^0	1.27×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.03	1.05	0.04	0.03
2,743	a	500	1.50×10^0	7.03×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.03	1.05	0.03	0.02
2,843	a	500	8.09×10^0	4.07×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.02	1.05	0.02	0.01
2,943	a	500	5.10×10^0	2.55×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.01	1.05	0.01	0.01
3,043	a	500	3.10×10^0	1.54×10^0	0.007, 0.007	d	0.007, 0.007	0.007	0.01	1.05	0.01	0.01

Unknown.
Bicloroform chemical dosimeter data.

"A" film.
BUS film holder attached to stake - prime.

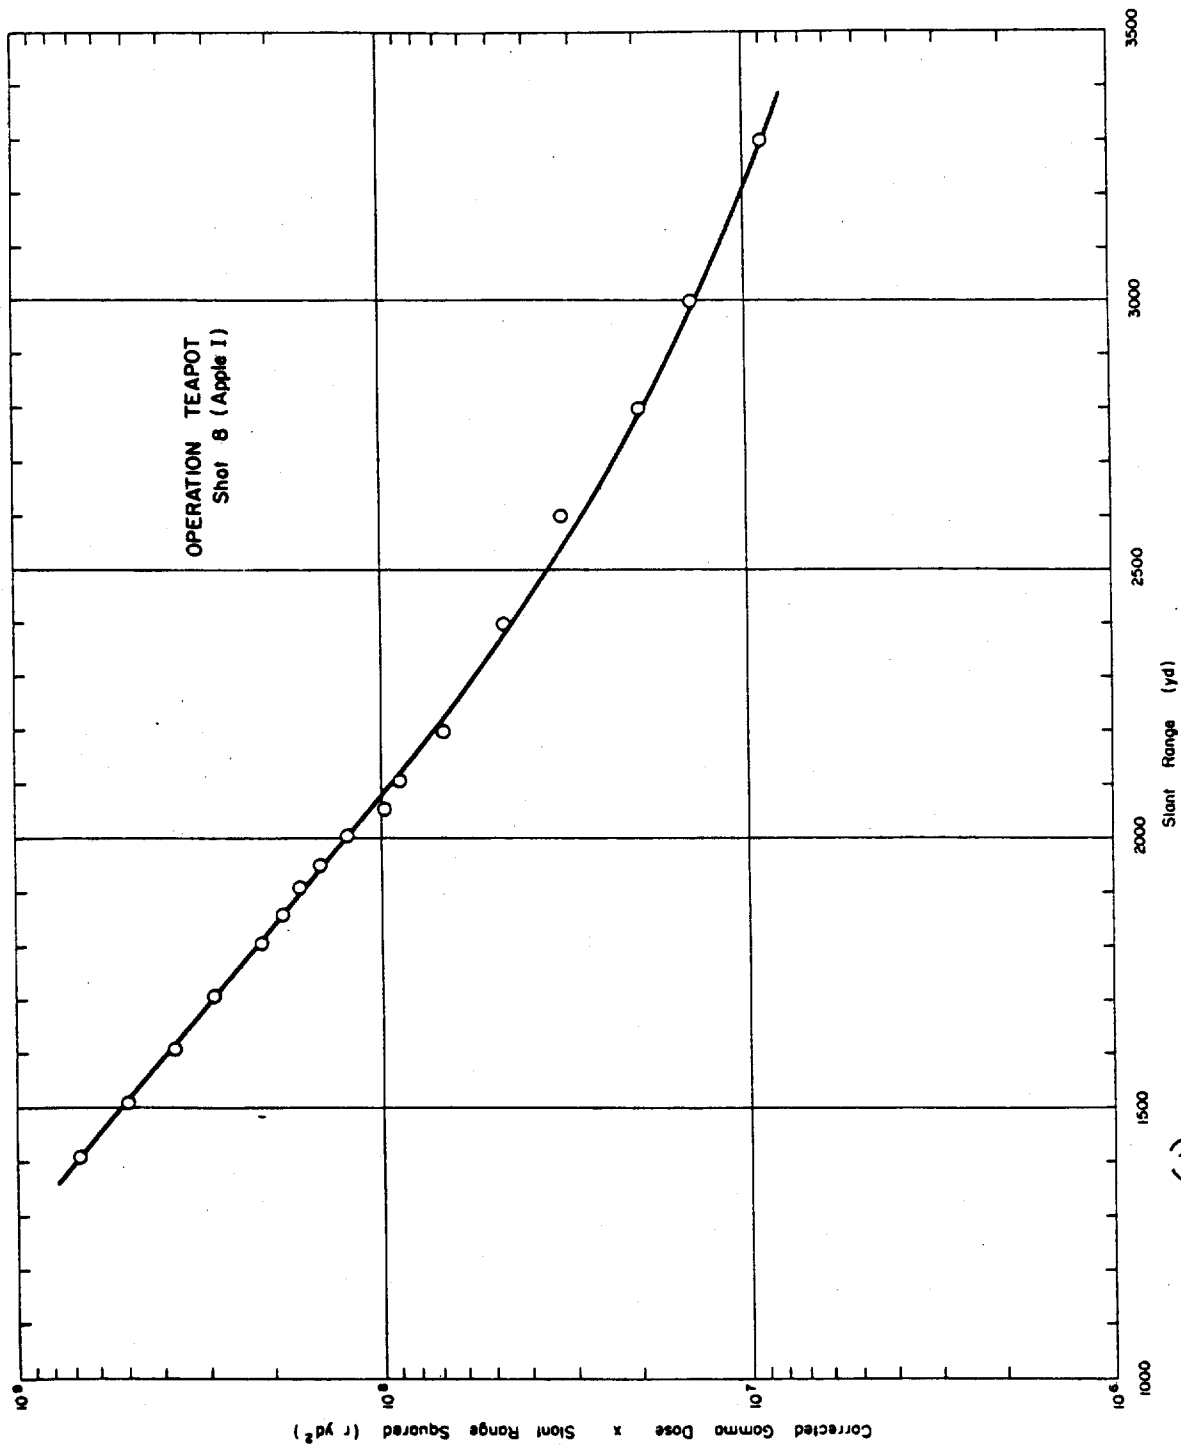

(v) Figure 3.48 (S-80) Operation Teapot - Shot 8 (Apple I) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

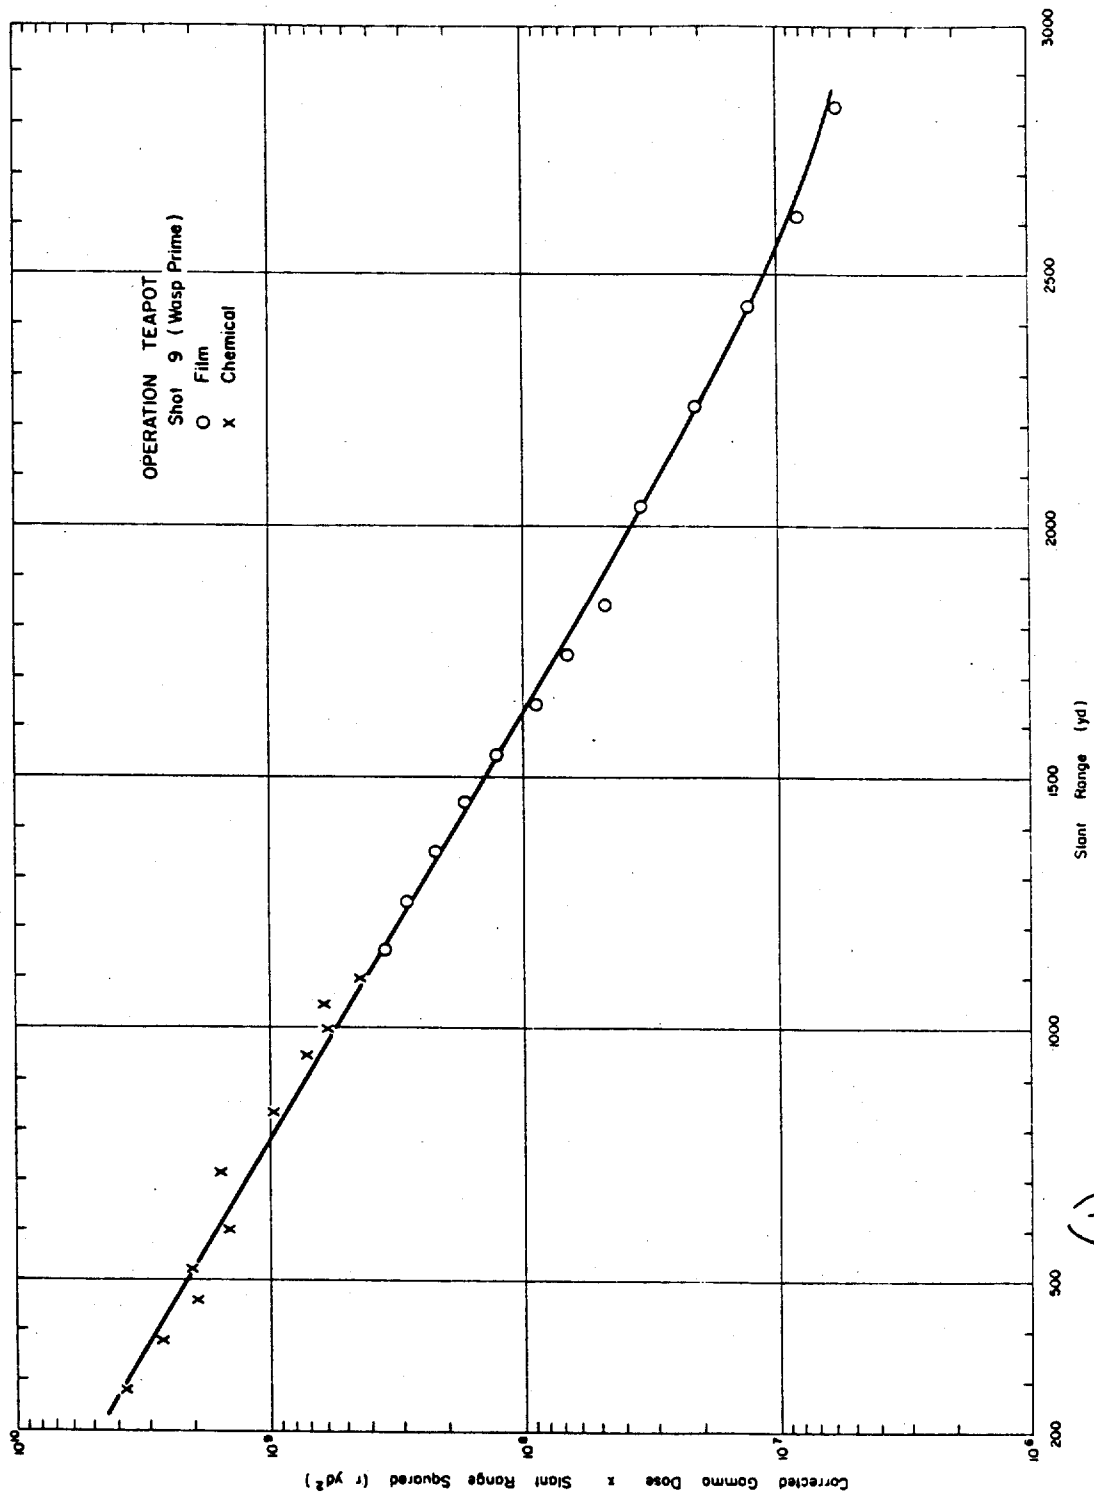

(U)
Figure 3.49 (S-RD) Operation Teapot - Shot 9 (Wasp Prime) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(10) TABLE 3.75 INITIAL GAMMA DOSE DATA - OPERATION TEMPO, SHOT 10 (HIGH ALTITUDE)

Slant Azi- Range math	Film Type	Un- corrected Gamma Dose	Neutron Flux			Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contri- bution
			r	n/cm ²	Pu n/cm ²	U n/cm ²								
yd														
310	a	197,000	1.10x10 ¹⁰	1.30x10 ¹⁰	5.60x10 ⁹	2.00x10 ⁹	7,330	a	a	7,330	180,000	a	180,000	d
327	a	108,000	4.20x10 ⁹	4.80x10 ⁹	2.80x10 ⁹	9.30x10 ⁸	2,830	a	a	2,830	105,000	a	105,000	d
337	a	63,000	5.60x10 ⁹	3.10x10 ⁹	1.80x10 ⁹	7.30x10 ⁸	3,730	a	a	3,730	56,700	a	56,700	d
342	a	44,000	5.20x10 ⁹	2.70x10 ⁹	1.30x10 ⁹	5.80x10 ⁸	3,470	a	a	3,470	40,500	a	40,500	d
348	a	27,300	5.70x10 ⁹	1.50x10 ⁹	7.80x10 ⁸	4.00x10 ⁸	5,240	a	a	5,240	21,600	a	21,600	d
603	a	13,000	2.20x10 ⁹	9.70x10 ⁸	3.60x10 ⁸	1.60x10 ⁸	250	a	a	250	9,390	a	9,390	d
1,040	a	6,000	1.30x10 ⁹	2.40x10 ⁹	2.50x10 ⁸	5.60x10 ⁷	3,230	a	a	3,230	6,420	a	6,420	d
1,235	a	5,900	7.00x10 ⁸	4.20x10 ⁸	1.40x10 ⁸	2.60x10 ⁷	80.2	a	a	80.2	1,590.2	a	3,990	d
2,140	a	330	3.90x10 ⁸	1.00x10 ⁸	1.90x10 ⁷	4.60x10 ⁶	8.78, 7.82	a	a	18.7, 28.0	318, 309	a	318, 309	d
3,320	a	60	6.50x10 ⁷	1.00x10 ⁷	3.60x10 ⁶	1.00x10 ⁶	1.47	a	a	4.10	76	a	76	d
4,213	a	30	1.49x10 ⁷	2.40x10 ⁶	9.40x10 ⁵	2.70x10 ⁵	0.27	a	a	1.01	29	a	29	d

Unknown.

Chloroform chemical dosimeter data.

Steel instrumentation drip canisters.

No data since the neutron data were taken at altitudes and not on the ground.


(10) TABLE 3.76 INITIAL GAMMA DOSE DATA - OPERATION TEMPO, SHOT 11 (POST)

Slant Azi- Range math	Film Type	Un- corrected Gamma Dose	Neutron Flux			Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contri- bution
			r	n/cm ²	Pu n/cm ²	U n/cm ²								
yd														
310	a	548.0	1.00x10 ¹⁰	5.10x10 ⁹	2.70x10 ⁹	8.70x10 ⁸	1,140	a	a	1,140	20,650	a	20,650	d
412	a	23,000	3.50x10 ⁹	1.97x10 ⁹	1.00x10 ⁹	3.30x10 ⁸	780	a	a	780	2,790	a	2,790	d
510	a	7,800	1.60x10 ⁹	8.27x10 ⁸	4.12x10 ⁸	1.40x10 ⁸	377	a	a	377	1,194	a	1,194	d
608	a	1,500	7.50x10 ⁸	3.70x10 ⁸	1.78x10 ⁸	6.45x10 ⁷	86	a	a	86	1,520	a	1,520	d
905	a	590	9.50x10 ⁷	4.40x10 ⁷	2.00x10 ⁷	7.80x10 ⁶	19	a	a	19	324	a	324	d
955	a	355	6.00x10 ⁷	3.00x10 ⁷	1.30x10 ⁷	5.90x10 ⁶	14	a	a	14	307	a	307	d
1,055	a	290, 600	4.20x10 ⁷	1.90x10 ⁷	8.70x10 ⁶	3.50x10 ⁶	6.0, 5.5	a	a	6.0, 5.5	233, 235	a	233, 235	d
1,100	a	120, 600	2.60x10 ⁷	1.20x10 ⁷	5.30x10 ⁶	2.30x10 ⁶	3.8	a	a	3.8	167, 165	a	167, 165	d
1,177	a	610	1.60x10 ⁷	7.30x10 ⁶	3.20x10 ⁶	1.30x10 ⁶	3.3	a	a	3.3	114	a	114	d
1,204	a	600	1.40x10 ⁷	6.30x10 ⁶	2.60x10 ⁶	1.10x10 ⁶	2.1	a	a	2.1	95	a	95	d
1,259	a	600	1.00x10 ⁷	4.60x10 ⁶	1.80x10 ⁶	8.10x10 ⁵	1.4	a	a	1.4	77	a	77	d
1,342	a	600	6.00x10 ⁶	2.70x10 ⁶	1.10x10 ⁶	5.10x10 ⁵	1.3	a	a	1.3	54	a	54	d
1,427	a	600	3.70x10 ⁶	1.60x10 ⁶	6.20x10 ⁵	3.00x10 ⁵	0.86	a	a	0.86	37	a	37	d
1,516	a	510	2.30x10 ⁶	9.70x10 ⁵	3.70x10 ⁵	1.90x10 ⁵	0.70	a	a	0.70	24	a	24	d
1,606	a	510	1.90x10 ⁶	5.60x10 ⁵	2.20x10 ⁵	1.10x10 ⁵	0.43	a	a	0.43	14	a	14	d
1,652	a	510	8.60x10 ⁵	3.40x10 ⁵	1.30x10 ⁵	6.70x10 ⁴	0.30	a	a	0.30	9.4	a	9.4	d
1,787	a	510	6.00x10 ⁵	2.00x10 ⁵	7.30x10 ⁴	4.00x10 ⁴	0.10	a	a	0.10	6.2	a	6.2	d
1,870	a	500	3.70x10 ⁵	1.30x10 ⁵	4.30x10 ⁴	2.50x10 ⁴	0.08	a	a	0.08	5.1	a	5.1	d

Unknown.

Background values when the canisters were not in the correct range.

One film holder is attached to station.

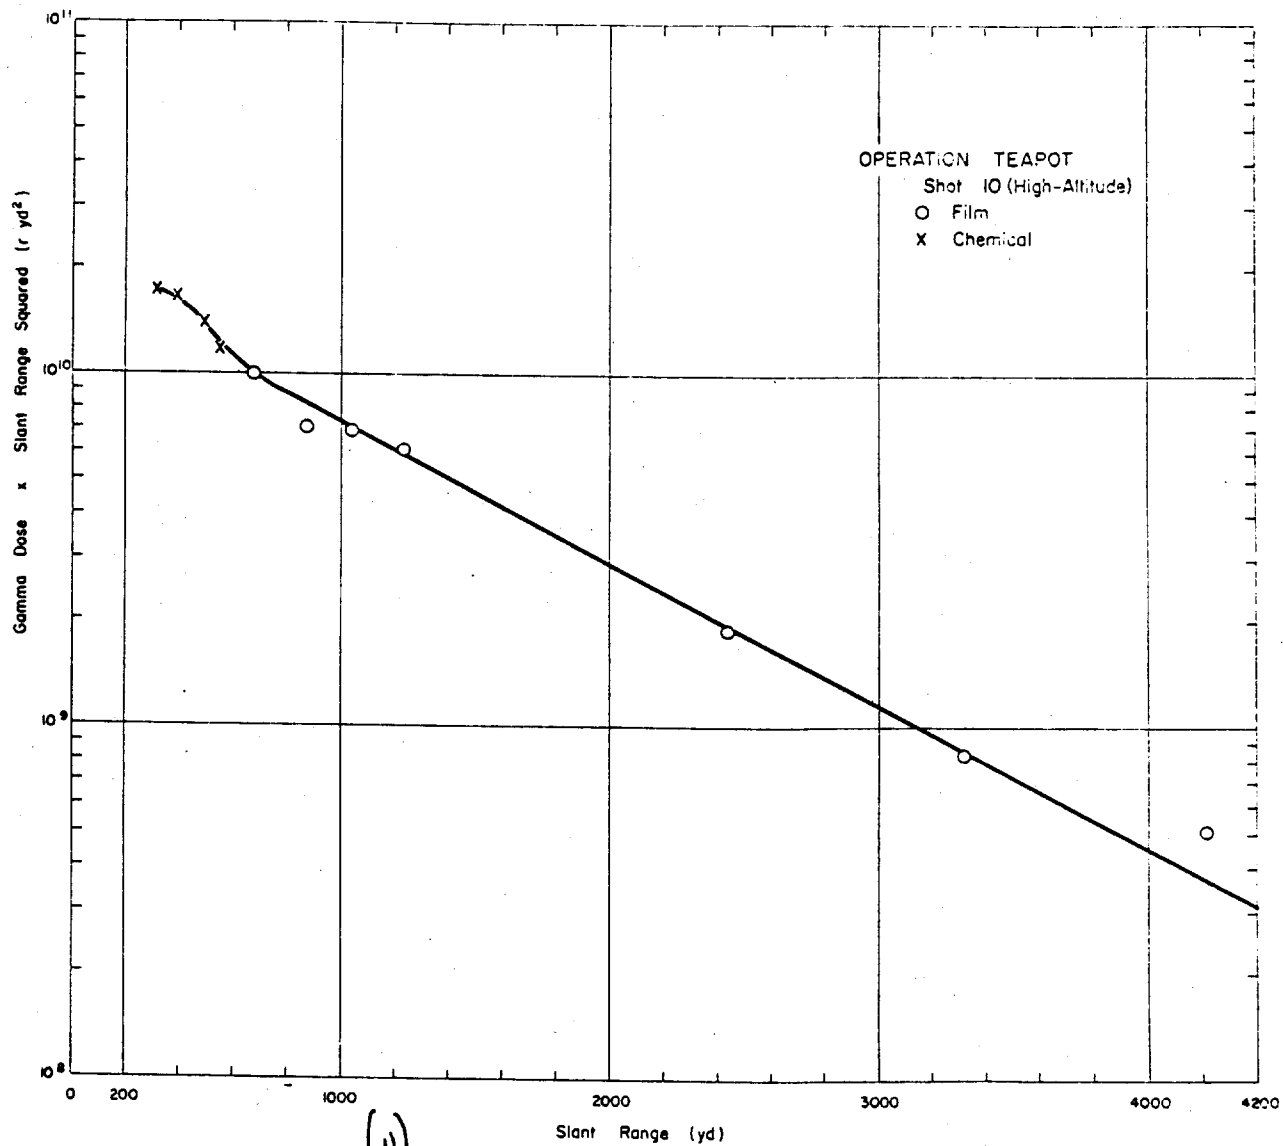

(U)
Figure 3.50 (S-RD) Operation Teapot - Shot 10 (High-Altitude) - Partially corrected gamma-dose-times-slant-range-squared versus slant-range (U).

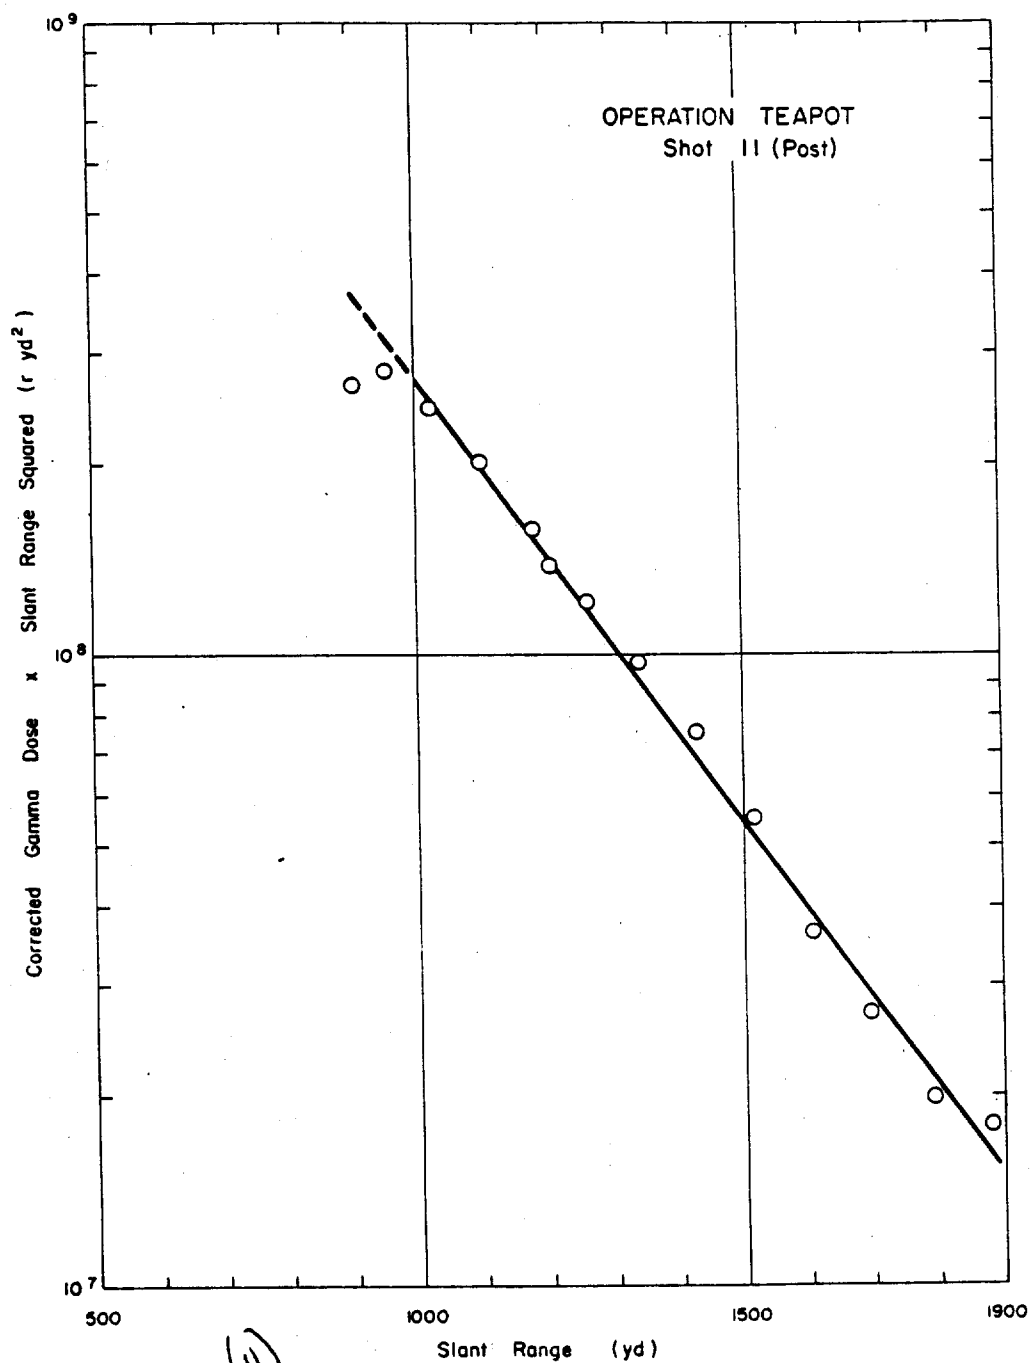


Figure 3.51 (S-RD) Operation Teapot - Shot 11 (Post) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(U)

TABLE 3.77 INITIAL GAMMA DOSE DATA - OPERATING TEAM'S, SHOT 12 (MFT)

Shot Range	Alt. m	File Type	Cor- rected Gamma Dose	Neutron Flux		Atm. Thermal Correc- tion	Psi. Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contrib- ution
				n/cm^2	n/cm^2									
34				n/cm^2	n/cm^2									
1,000	540.0	540.0	4,900	2.72x10 ¹¹	1.74x10 ¹¹	4.24x10 ¹¹	2.54x10 ¹¹	b	54.0	561.7	4,240	1.0	4,240	122
1,100	540.0	540.0	2,600	1.42x10 ¹¹	7.64x10 ¹⁰	3.66x10 ¹¹	1.37x10 ¹¹	b	30.3	300.2	2,300	1.0	2,300	66
1,200	540.0	540.0	670	1.89x10 ¹⁰	1.01x10 ¹⁰	4.72x10 ¹⁰	1.72x10 ¹⁰	b	3.84	13.38	657	1.0	657	8.7
1,300	1230	1230	530	1.41x10 ¹⁰	7.42x10 ⁹	3.61x10 ¹⁰	1.30x10 ¹⁰	b	2.87	10.70	519	1.0	519	6.1
1,400	1230	1230	440	1.06x10 ¹⁰	5.70x10 ⁹	2.69x10 ¹⁰	9.71x10 ⁹	b	2.14	8.07	432	1.0	432	4.7
1,500	606	1290	300	8.06x10 ⁹	4.34x10 ⁹	2.09x10 ¹⁰	7.36x10 ⁹	b	1.64	5.43	275	1.0	275	3.5
1,600	606	1290	265	6.09x10 ⁹	3.26x10 ⁹	1.53x10 ¹⁰	5.55x10 ⁹	b	1.24	4.11	261	1.0	261	2.7
1,700	606	1290	226	4.57x10 ⁹	2.51x10 ⁹	1.19x10 ¹⁰	4.23x10 ⁹	b	0.93	3.11	223	1.0	223	1.9
1,800	606	1290	190	3.47x10 ⁹	1.87x10 ⁹	8.93x10 ⁹	3.15x10 ⁹	b	0.71	2.37	188	1.0	188	1.3
1,900	606	1290	141	2.64x10 ⁹	1.47x10 ⁹	6.81x10 ⁹	2.42x10 ⁹	b	0.54	1.81	139	1.0	139	0.9
1,950	606	1290	123	2.01x10 ⁹	1.11x10 ⁹	5.23x10 ⁹	1.83x10 ⁹	b	0.41	1.37	122	1.0	122	0.8
1,975	606	606	100	1.52x10 ⁹	8.54x10 ⁸	3.92x10 ⁹	1.38x10 ⁹	b	0.31	1.05	99	1.0	99	0.7
1,995	606	606	86	1.15x10 ⁹	6.42x10 ⁸	3.06x10 ⁹	1.07x10 ⁹	b	0.24	0.80	85	1.0	85	0.6
2,004	606	606	67	8.96x10 ⁸	5.10x10 ⁸	2.36x10 ⁹	8.21x10 ⁸	b	0.17	0.55	66	1.0	66	0.5
2,058	606	606	49	5.47x10 ⁸	3.16x10 ⁸	1.46x10 ⁹	5.01x10 ⁸	b	0.10	0.33	49	1.0	49	0.4
2,156	606	606	33	3.32x10 ⁸	1.87x10 ⁸	8.71x10 ⁸	2.97x10 ⁸	b	<0.10	<0.33	33	1.0	33	<0.3
2,304	510	510	24	1.81x10 ⁸	1.07x10 ⁸	5.09x10 ⁸	1.66x10 ⁸	b	<0.10	<0.33	24	1.0	24	<0.3
2,404	510	510	15	1.01x10 ⁸	6.40x10 ⁷	2.94x10 ⁸	9.46x10 ⁷	b	<0.10	<0.33	15	1.0	15	<0.3
2,603	510	510	9.1	3.59x10 ⁷	2.36x10 ⁷	1.06x10 ⁸	3.44x10 ⁷	b	<0.10	<0.33	9.1	1.0	9.1	<0.3
2,703	510	510	6.6	2.37x10 ⁷	1.44x10 ⁷	6.59x10 ⁷	2.16x10 ⁷	b	<0.10	<0.33	6.6	1.0	6.6	<0.3
2,803	510	510	4.9	1.44x10 ⁷	8.65x10 ⁶	3.94x10 ⁷	1.30x10 ⁷	b	<0.10	<0.33	4.9	1.0	4.9	<0.3
2,903	502	502	3.7	8.76x10 ⁶	5.34x10 ⁶	2.40x10 ⁷	7.83x10 ⁶	b	<0.10	<0.33	3.7	1.0	3.7	<0.3
3,003	502	502	2.6	5.27x10 ⁶	3.31x10 ⁶	1.44x10 ⁷	4.77x10 ⁶	b	<0.10	<0.33	2.6	1.0	2.6	<0.3
3,103	502	502	1.9	3.17x10 ⁶	2.02x10 ⁶	9.14x10 ⁶	2.91x10 ⁶	b	<0.10	<0.33	1.9	1.0	1.9	<0.3
3,203	502	502	1.4	1.94x10 ⁶	1.24x10 ⁶	5.61x10 ⁶	1.79x10 ⁶	b	<0.10	<0.33	1.4	1.0	1.4	<0.3
3,303	502	502	1.12	1.17x10 ⁶	7.69x10 ⁵	3.44x10 ⁶	1.07x10 ⁶	b	<0.10	<0.33	1.12	1.0	1.12	<0.3
3,403	502	502	0.80	7.07x10 ⁵	4.83x10 ⁵	2.12x10 ⁶	6.47x10 ⁵	b	<0.10	<0.33	0.80	1.0	0.80	<0.3
3,502	502	502	0.65	4.39x10 ⁵	3.03x10 ⁵	1.30x10 ⁶	3.94x10 ⁵	b	<0.10	<0.33	0.65	1.0	0.65	<0.3
3,602	502	502	0.45	2.69x10 ⁵	1.85x10 ⁵	8.15x10 ⁵	2.42x10 ⁵	b	<0.10	<0.33	0.45	1.0	0.45	<0.3

Unknown.


BMS film holder attached to stabs.

TABLE 3.78 INITIAL GAMMA DOSE DATA - OPERATING TEAM'S, SHOT 13 (APRIL 11)

Shot Range	Alt. m	File Type	Uncorrected Gamma Dose	Neutron Flux		Shield Type
				n/cm^2	n/cm^2	
34				n/cm^2	n/cm^2	
1,500	540	1290	840	b	b	c
1,600	540	1290	320	b	b	c
1,700	540	1290	200-180	b	b	c
1,800	540	1290	135-110	b	b	c
1,900	540	1290	99-82	b	b	c
2,000	540	1290	63-52	b	b	c
2,100	540	1290	46-38	b	b	c
2,200	540	1290	33-25	b	b	c
2,300	540	1290	20-19-18	b	b	c
2,400	540	510	11	b	b	c
2,500	540	510	11	b	b	c
2,600	540	510	11	b	b	c
2,700	540	510	11	b	b	c
2,800	540	510	11	b	b	c
2,900	540	510	11	b	b	c
3,000	540	510	11	b	b	c
3,100	540	510	11	b	b	c
3,200	540	510	11	b	b	c
3,300	540	510	11	b	b	c

Unknown.

BMS film holder attached to sniffer from stabs.

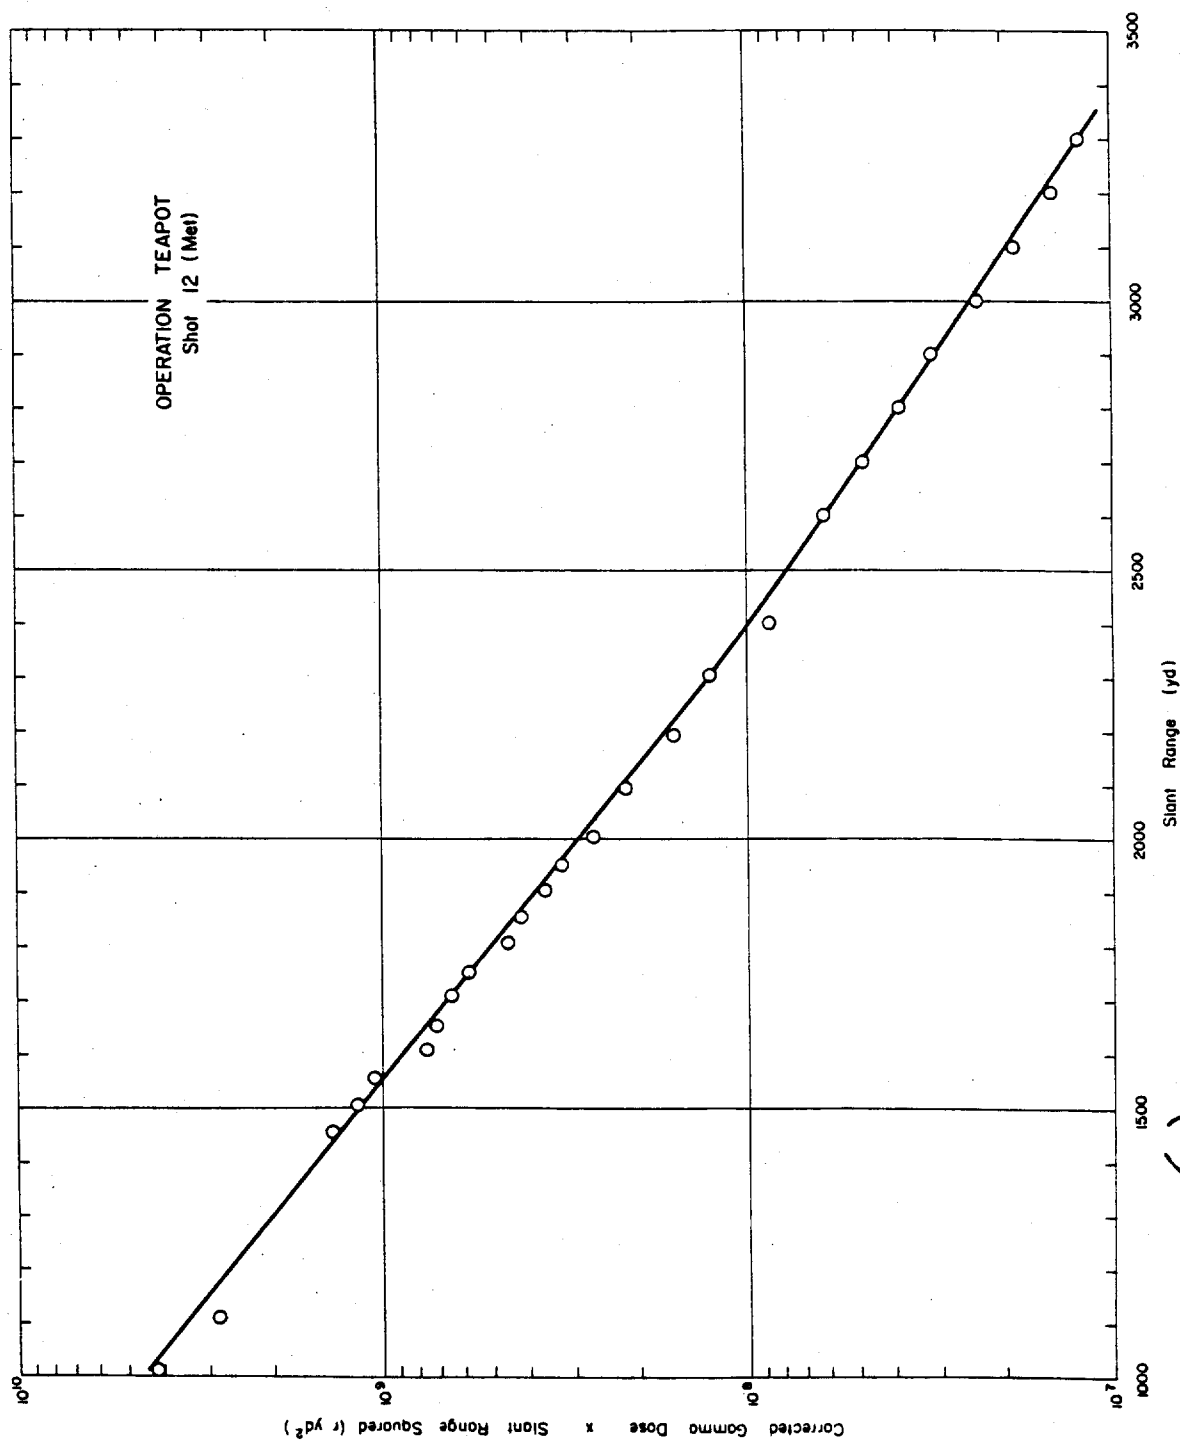

(U) Figure 3.52 (S-R) Operation Teapot - Shot 12 (Met) - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

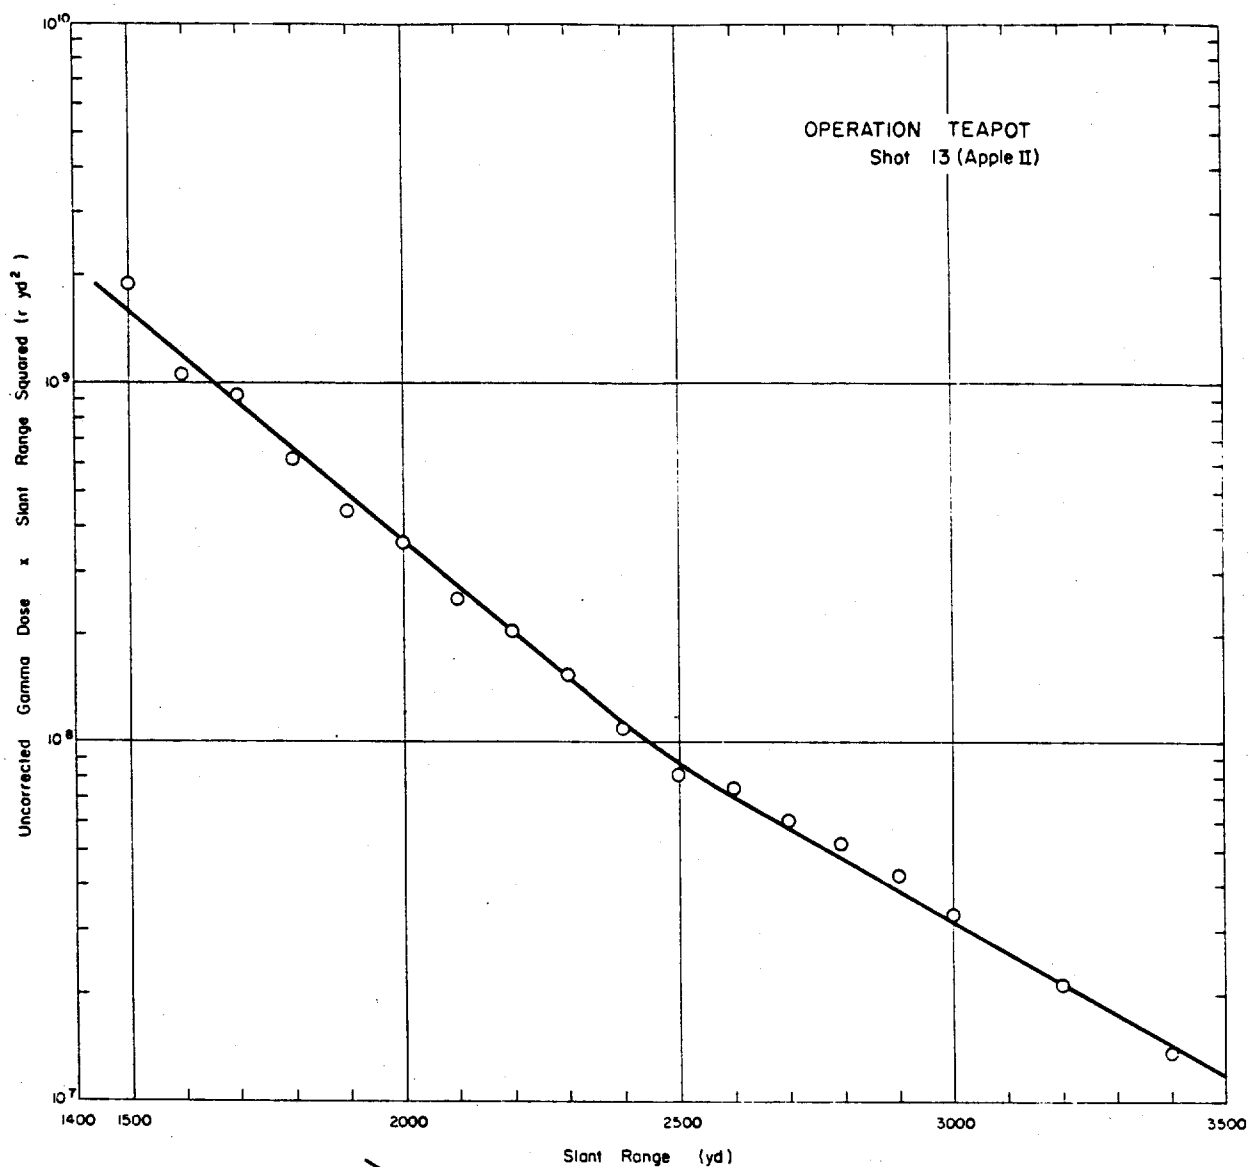


Figure 3.53 (S RD) Operation Teapot - Shot 13 (Apple II) -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

(6)

(S-RD) TABLE 3.79 INITIAL GAMMA DOSE DATA - OPERATION TEAPOT, SHOT ZUCHINNI

Slant Range	Azimuth	Film Type	Uncorrected Gamma Dose	Neutron Flux					Shield Type
				Au	Pu	Np	U	S	
yd			r						
1,500	a	1290	530			b			c
1,600	a	1290	350			b			c
1,700	a	1290	230			b			c
1,800	a	1290, 606	150, 130			b			c
1,900	a	1290, 606	90, 77			b			c
2,000	a	1290, 606	63, 55			b			c
2,100	a	1290, 606	42, 38			b			c
2,200	a	1290, 606	30, 27			b			c
2,300	a	1290, 606	22, 20			b			c
2,400	a	510	13.5			b			c
2,500	a	510	11			b			c
2,600	a	510, 502	8.4, 8.0			b			c
2,700	a	510, 502	6.3, 6.0			b			c
2,800	a	510, 502	4.7, 4.4			b			c
2,900	a	510, 502	3.5, 3.1			b			c
3,000	a	510, 502	2.6, 2.3			b			c
3,200	a	502	1.45			b			c
3,400	a	502	0.78			b			c

^aUnknown.^bNo neutron data.^cNBS film holder attached to angle-iron stake.

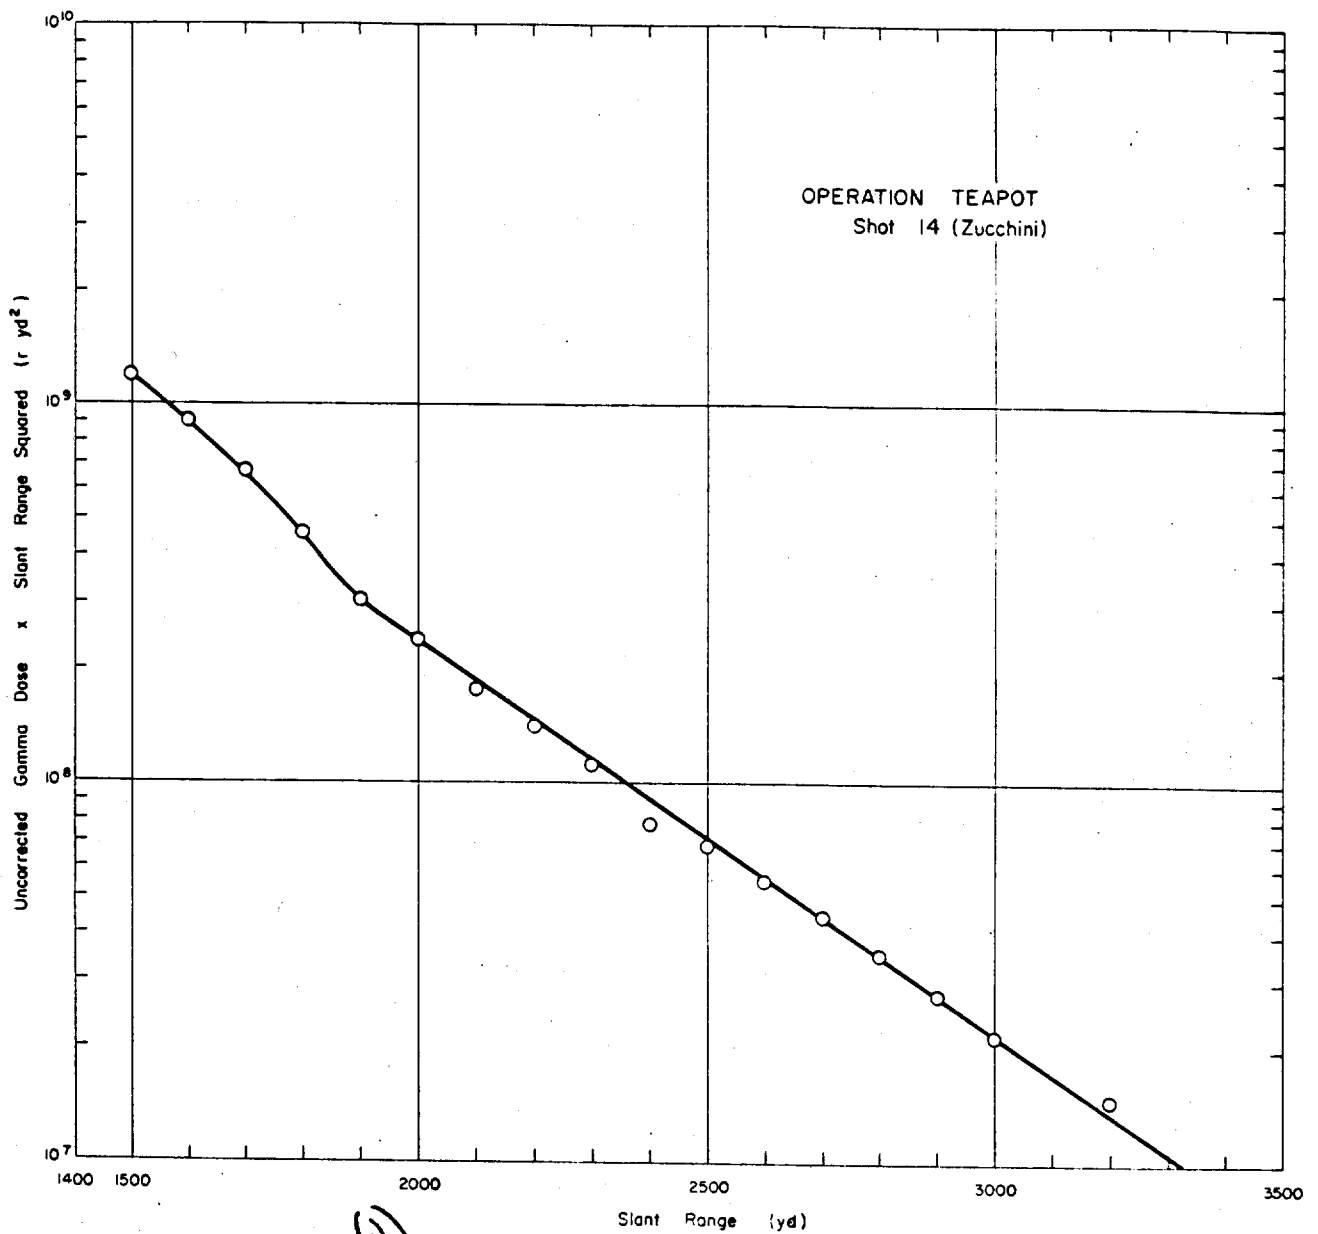


Figure 3.54 (S-RD) Operation Teapot - Shot 14 (Zucchini) -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

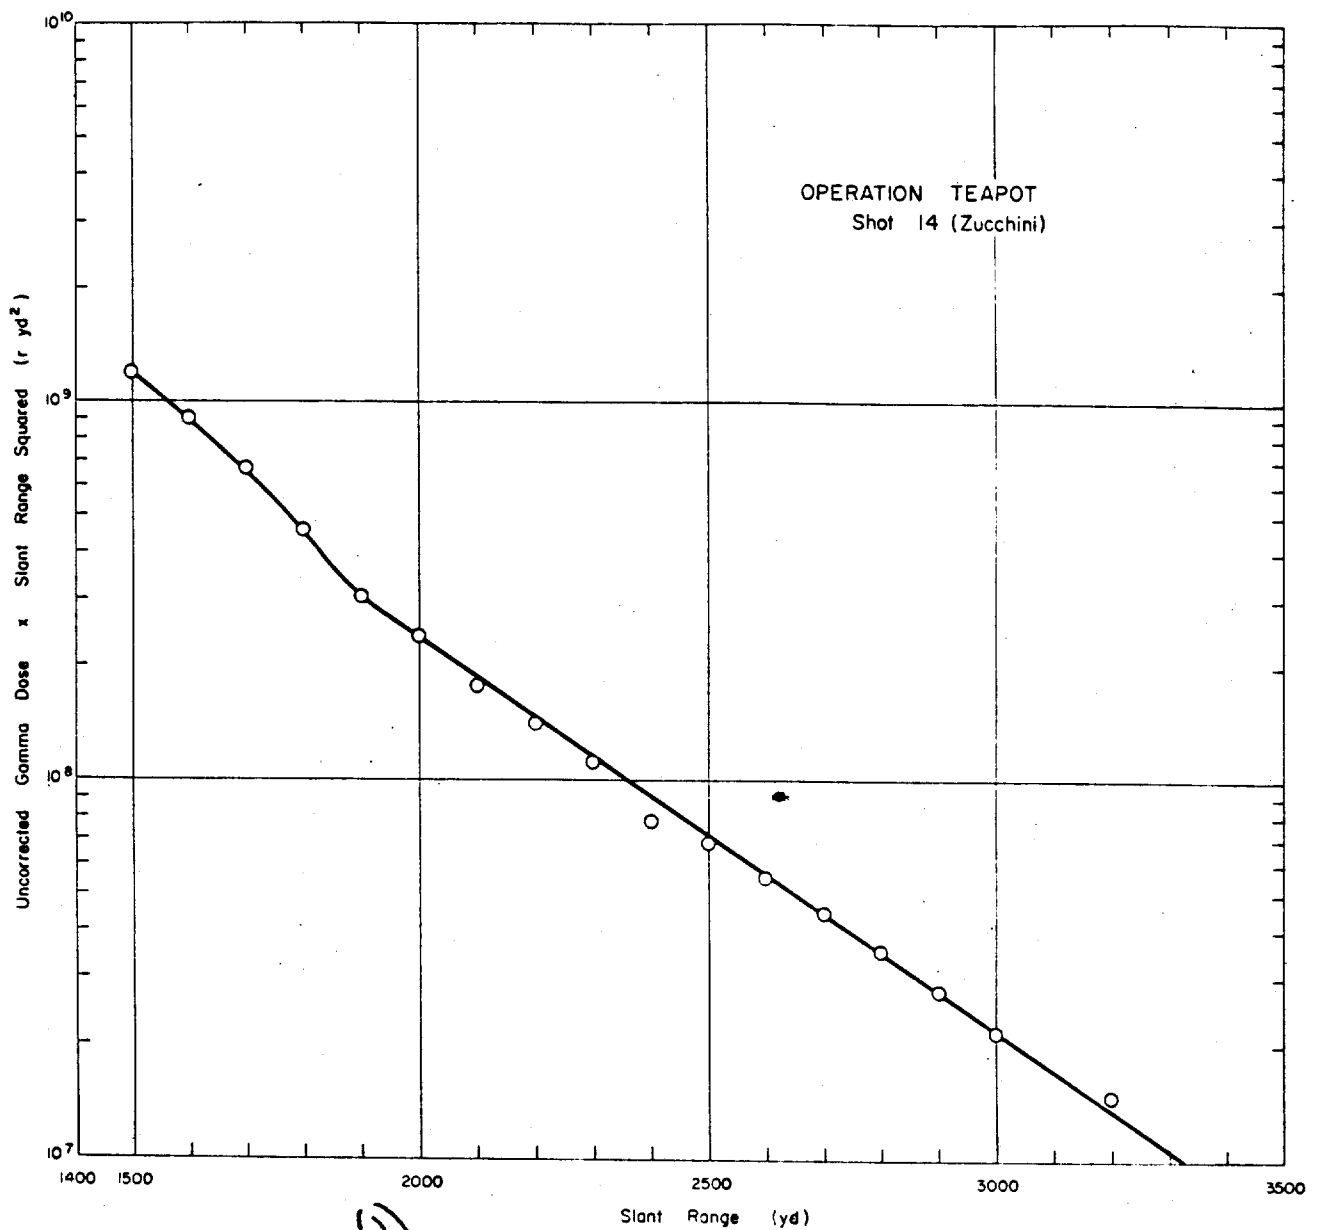


Figure 3.54 (S-10) Operation Teapot - Shot 14 (Zucchini) -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

(U) TABLE 3-60 SHOT INFORMATION - OPERATION REDWING

Shot Designation	Date and Time Fired	Location and Type	Height of Burst ft	Yield	
				Total	Kt
Zuni	27 May 1956 1756:00 GMT	Enman (Tare) Surface	9	4.6x10 ³	
Yuma	27 May 1956 1956:01 GMT	Sally-Tower	200		
Erie	30 May 1956 1815:29 GMT	Yvonne-Tower	300		
Blackfoot	11 June 1956 1826:00 GMT	Yvonne-Tower	200		
Flathead	11 June 1956 1826:00 GMT	Off Yurochi (Dog) Barge	15		
Kickapoo	13 June 1956 2326:01 GMT	Sally-Tower	300		
Dakota	25 June 1956 1806:00 GMT	Off Yurochi (Dog) Barge	Surface		
Navajo	10 July 1956 1756:00 GMT	Off Yurochi (Dog) Barge	15		
Tewa	20 July 1956 1746:00 GMT	Between Yurochi (Dog) and Namu (Charlie) Barge	15		
				4.6x10 ³	

(U) TABLE 3-61 METEOROLOGICAL DATA - OPERATION REDWING

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	ρ/ρ ₀	(ρ ₀ /ρ) ³
Zuni	1,010.5	300.5	1.13	0.91	1.1
Yuma	1,009.5	300.5	1.17	0.90	1.2
Erie	1,009.1	299.8	1.18	0.91	1.3
Blackfoot	1,012.5	300.5	1.18	0.91	1.21
Flathead	1,012.9	300.8	1.18	0.91	1.1
Kickapoo	1,010	301.5	1.17	0.90	1.28
Dakota	1,009.1	300.8	1.17	0.90	1.28
Navajo	1,010.5	300.5	1.13	0.91	1.1
Tewa	1,009.5	300.8	1.17	0.90	

(5)

TABLE 3.83 INITIAL GAMMA DOSE DATA - OPERATION REDWING, SHOT ZUNI

Slant Range	Station	Location	File Type	Total Exposure	Residual + Preshot Exposure	Corrected Exposure	Attenuation Shielding Factor
yd				f	f	f	
2,144	210.30	Rover	548	16,000	150	15,850	1.10
2,413	210.29	Uncle Reef	606	2,000	15	1,985	1.10
3,140	210.33	Uncle Reef	606	1,800	15	1,785	1.10
3,140	210.33	Uncle Reef	Chen Dos	800	15	835	1.10
3,433	210.34	Uncle Reef	606	465	150	315	1.10
3,645	210.35	Uncle Reef	606	205	15	190	1.10
3,757	210.27	Peter Reef	606	200	150	50	1.10
3,837	210.56	Peter Reef	606	69	15	54	1.10
4,313	210.26	Peter Reef	510	25	15	10	1.10

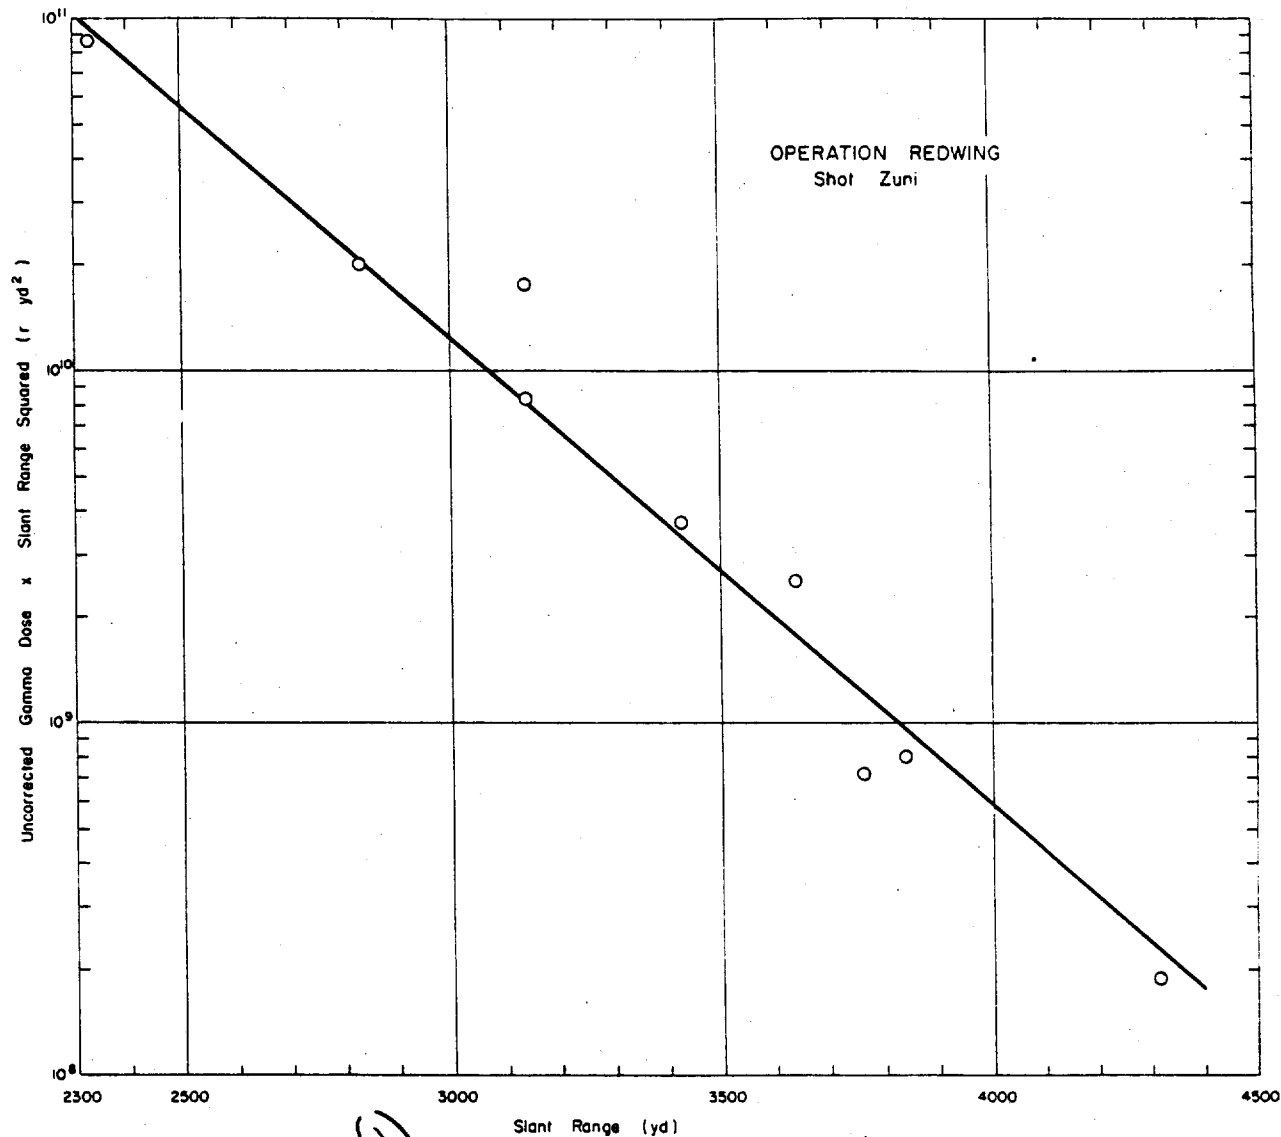


Figure 3.56 (S-RD) Operation Redwing - Shot Zuni - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

Pages 155 thru 161 Deleted.

(U) ~~SECRET~~ TABLE 3.90 INITIAL GAMMA DOSE DATA - OPERATION REDWING, SHOT TEMA

Slant Range yd	Station	Location	Film Type	Total Exposure	Residual + Preshot Exposure	Corrected Exposure	Attenuation Shielding Factor
958	113.07	MM No. 1	548	$> 7 \times 10^6$	800	$> 7 \times 10^6$	1.20
1,980	113.08	MM No. 2	548	$> 7 \times 10^6$	800	$> 7 \times 10^6$	1.20
2,253	113.04	Charlie-Dog Reef	548-Chem	$7 \times 10^6 - 3.3 \times 10^6$	250	3.35×10^6	1.21
3,500	113.03	Charlie-Dog Reef	548	3,300	250	3,075	1.20
3,610	113.04	MM No. 3	606	1,950	800	1,150	1.20

Page 163 Deleted.

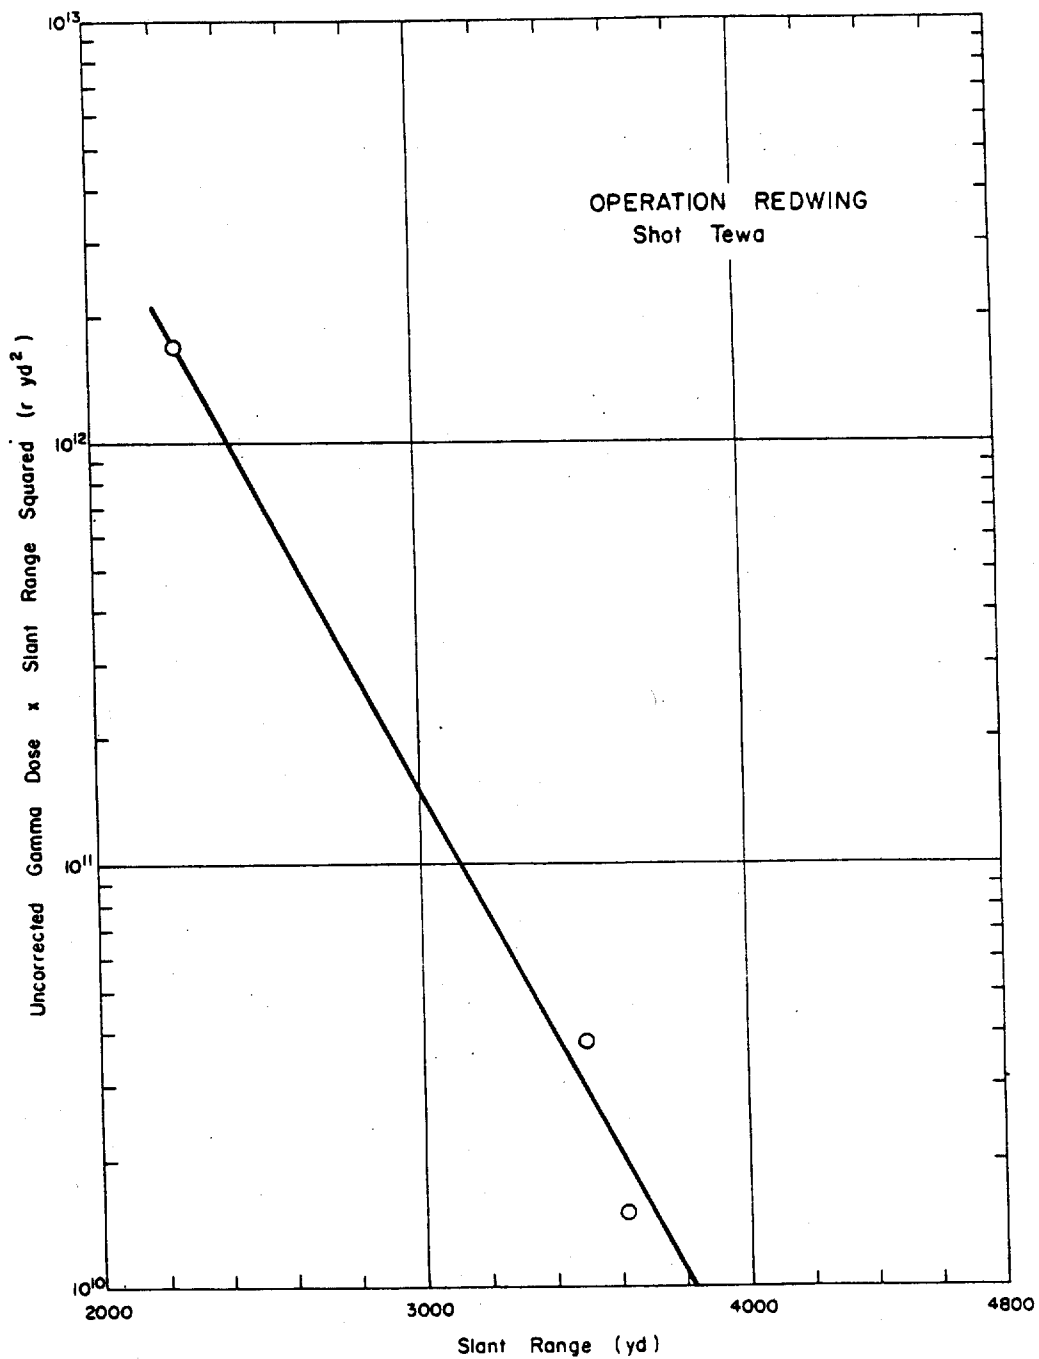


Figure 3.63 (S-RD) Operation Redwing - Shot Tewa - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

(S-2) TABLE 3-91 SHOT INFORMATION - OPERATION PLUMBHO

Shot Designation	Date and Time Fired	Location and Type	Height of Burst ft	Yield	
				Total	kt
Boltzman	28 May 1957 1155:00 GMT	Area 7-C Tower	500	10.7	10.7
Franklin	2 June 1957 1155:00 GMT	Area 3-Tower	300	0.14	0.14
Wilson	18 June 1957 1145:00 GMT	Area 8-9a-Balloon	500	10.3	10.3
Priscilla	24 June 1957 1330:00 GMT	F.F.-Balloon	700	36.6	36.6
Hood	5 July 1957 1140:00 GMT	Area 8-9a-Balloon	1500	71	71
Diablo	15 July 1957 1130:00 GMT	Area 2-Tower	500	17	17
Kepler	24 July 1957 1150:00 GMT	Area 4-Tower	500	10.3	10.3
Owens	25 July 1957 1330:00 GMT	Area 8-9a-Balloon	500	9.7	9.7
Stokes	7 Aug 1957 1225:00 GMT	Area 8-7b-Balloon	1500	13	13
Shasta	18 Aug 1957 1200:00 GMT	Area 2-Tower	500	16.5	16.5
Doppler	23 Aug 1957 1230:00	Area 7-Balloon	1500	10.7	10.7
Franklin Prime	30 Aug 1957 1240:00 GMT	Area 7b-Balloon	750	4.7	4.7
Smokey	31 Aug 1957 1230:00 GMT	Area 2-Tower	700	44	44
Galileo	2 Sep 1957 1240:00 GMT	Area 1-Tower	500	11.5	11.5
Lepidus	3 Sep 1957 1300:00 GMT	Area 7b-Balloon	750	11.4	11.4
Fizena	14 Sep 1957 1609:00 GMT	Area 3-Tower	500	11.4	11.4
Whitney	23 Sep 1957 1257:00 GMT	Area 2-Tower	500	11.4	11.4
Chlorination	28 Sep 1957 1300:00 GMT	Area 9-Balloon	1500	11.4	11.4

(U) TABLE 3.9c METEOROLOGICAL DATA - OPERATION PLUMBBOB

Shot	Pressure mb	Temperature °K	Density g/cm ³ x 10 ³	ρ/ρ_s	$(\rho_s/\rho)^2$
Boltzman	879 ^a	286.5 ^b	1.05	0.81	1.53
Franklin	855 ^b	294.3	1.06	0.82	1.49
Wilson	881 ^a	284.6 ^a	1.06	0.82	1.49
Priscilla	875 ^b	293.5 ^b	1.06	0.82	1.49
	884 ^a	285 ^b	1.06	0.82	1.49
	865 ^b	293.3 ^b	1.06	0.82	1.49
	904.5 ^a	290.5 ^a	1.06	0.82	1.49
	886.7 ^b	297 ^b	1.01	0.78	1.64
Hood	881 ^a	287 ^a	1.04	0.80	1.56
Diablo	881 ^a	293.9 ^b	1.04	0.80	1.56
Kepler	881 ^a	286.8 ^a	1.05	0.81	1.53
	889 ^b	296.8 ^b	1.05	0.80	1.56
Owens	880 ^a	282.3 ^a	1.04	0.80	1.56
Stokes	878 ^a	294.2 ^b	1.04	0.80	1.56
Shasta	854 ^b	296.1 ^b	1.04	0.80	1.56
	880 ^a	288.5 ^a	1.03	0.79	1.60
	883 ^a	282.1 ^a	1.03	0.79	1.60
	852 ^b	288.8 ^b	1.03	0.79	1.60
Doppler	882 ^a	290.2 ^a	1.03	0.79	1.60
Franklin Prime	832 ^b	299.5 ^b	1.03	0.79	1.60
	877 ^a	281.2 ^a	1.06	0.82	1.49
Smoky	882 ^a	287.3 ^b	1.08	0.83	1.45
	881 ^b	277.2 ^a	1.05	0.81	1.53
Galileo	881 ^b	286.2 ^b	1.04	0.80	1.56
Laplace	887 ^a	281.5 ^a	1.04	0.80	1.56
Fizeau	882 ^b	293.8 ^b	1.04	0.80	1.56
	889 ^b	286.5 ^a	1.04	0.80	1.56
	885 ^a	296.4 ^a	1.04	0.80	1.56
Milne	885 ^a	295 ^b	1.08	0.83	1.45
Charleston	885 ^a	277.5 ^a	1.07	0.81	1.53
	887 ^a	290 ^b			
	859 ^b	287 ^a			

^aGround condition.^bBurst height condition.

(S-RD) TABLE 3.93 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT BOLTZMAN

Slant Range	Azimuth	Type Detector	Uncorrected Gamma Dose	Neutron Flux				Shield Type
				Au	Pu	Np	U	
yd			r	n/cm ²				
1,576	163°42'49.5"	Film 606	248.0	a				$\frac{1}{2}$ Emmett
2,109	163°42'49.5"	Film 510, 606	28.5-33.0	a				Emmett
5,711	-	Film 502	0.10	a				Franklin Shot Tower

^aInsufficient neutron data to extrapolate to the slant ranges of interest.

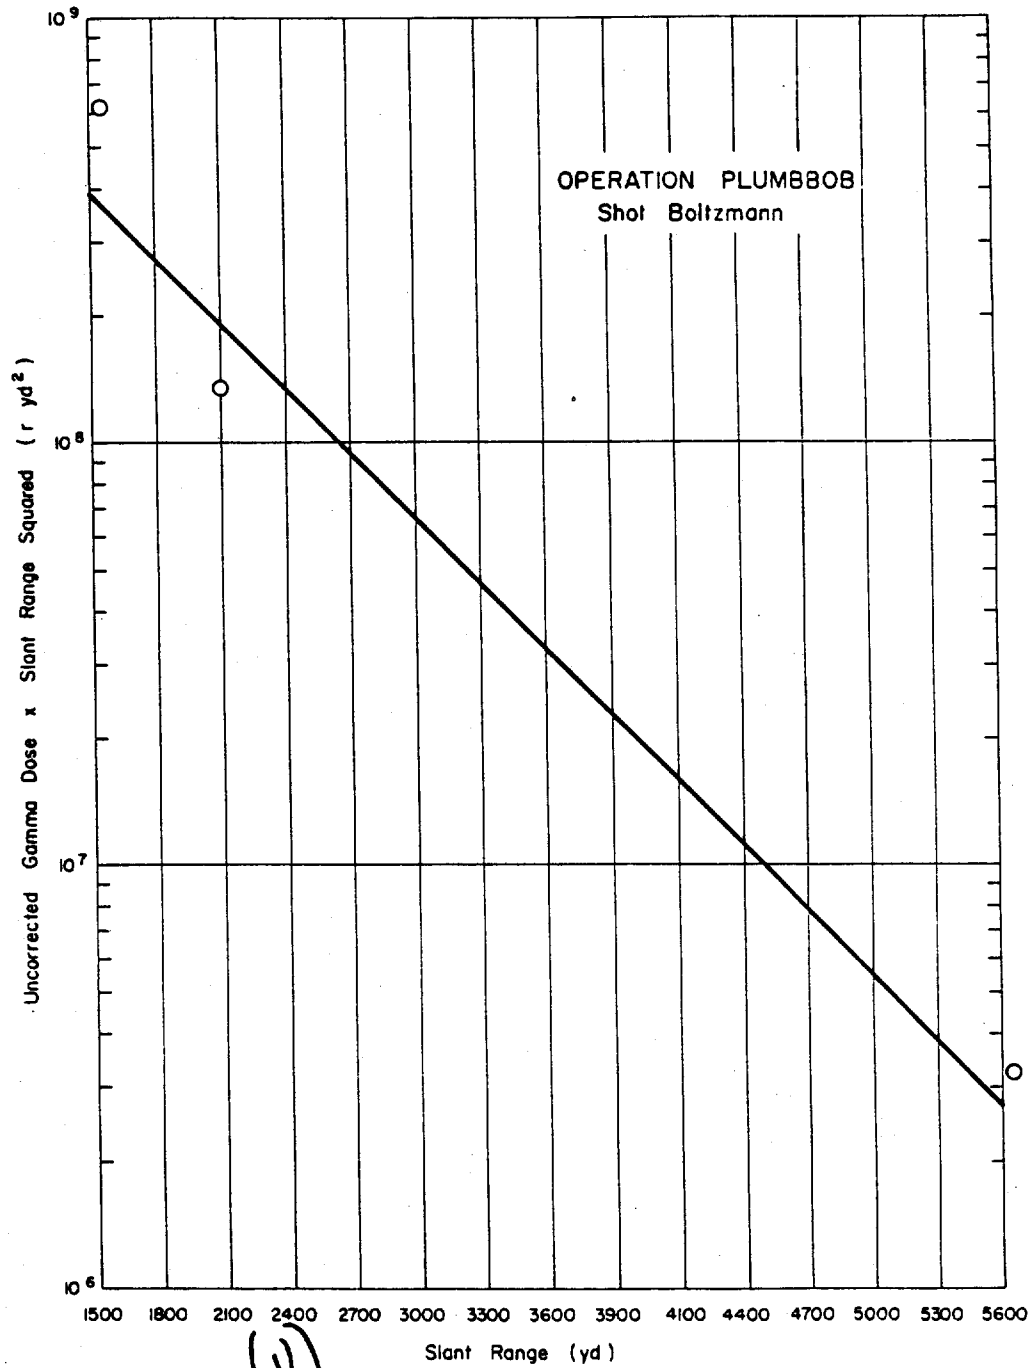


Figure 3.64 (S-RB) ^(U) Operation Plumbbob - Shot Boltzmann - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

TABLE 3.95 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT FRANKLIN

Slant Range	Azimuth	Dose Type	Uncor- rected		Au		Pu		Neutron Flux	
			r	n/cm ²	r	n/cm ²	r	n/cm ²	r	n/cm ²
510	a	c	540	1.08x10 ¹⁴	4.23x10 ¹³	2.6x10 ¹³	2.6x10 ¹³	5.96x10 ¹⁰		
609	a	c	400	5.39x10 ¹⁰	1.91x10 ¹¹	1.03x10 ¹¹	2.01x10 ¹⁰			
805	a	c	50	1.51x10 ¹⁰	5.23x10 ⁹	3.69x10 ⁹	8.26x10 ⁸			
910	a	c	50	4.55x10 ⁹	2.93x10 ⁹	2.05x10 ⁹	4.48x10 ⁸			
1,009	a	c	25	4.65x10 ⁹	1.66x10 ⁹	1.20x10 ⁹	2.60x10 ⁸			
1,104	a	c	12	2.79x10 ⁹	1.07x10 ⁹	6.36x10 ⁸	1.50x10 ⁸			
707	b	c	178	2.46x10 ¹⁰	8.71x10 ⁹	6.05x10 ⁹	1.31x10 ⁹			
816	b	c	70	1.42x10 ¹⁰	5.00x10 ⁹	3.50x10 ⁹	7.05x10 ⁸			
930	b	c	31	7.33x10 ⁹	2.54x10 ⁹	1.81x10 ⁹	3.92x10 ⁸			
1,127	b	c	20	2.48x10 ⁹	8.03x10 ⁸	6.10x10 ⁸	1.34x10 ⁸			

a 30°±19'±6"

b 30°±19'±6"

c Chemical.

d Negligible.

e CORU Beer Mug w/LA.

TABLE 3.95 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT WILSON

Slant Range	Azimuth	Dose Type	Uncor- rected		Au		Pu		Neutron Flux	
			r	n/cm ²	r	n/cm ²	r	n/cm ²	r	n/cm ²
527	163°42'49.5"	Film 548	52,000	1.94x10 ¹³	4.42x10 ¹²	2.90x10 ¹²	7.30x10 ¹²			
1,014	163°42'49.5"	Film 606	3,450.0	5.4x10 ¹¹	1.57x10 ¹¹	7.13x10 ¹¹	3.4x10 ¹¹			
1,014	163°42'49.5"	Film 606	2,800.0	5.4x10 ¹¹	1.57x10 ¹¹	7.13x10 ¹¹	3.4x10 ¹¹			
1,061	163°42'49.5"	Film 606	900.0	1.4x10 ¹¹	4.33x10 ¹⁰	2.23x10 ¹⁰	8.81x10 ⁹			
1,509	163°42'49.5"	Film 606	295.0	3.5x10 ¹⁰	1.18x10 ¹⁰	5.9x10 ⁹	2.55x10 ⁹			
1,557	163°42'49.5"	Film 606	165.0	9.1x10 ⁹	3.24x10 ⁹	1.42x10 ⁹	6.73x10 ⁸			
2,005	163°42'49.5"	Film 606	31.2-32.0	2.3x10 ⁹	8.69x10 ⁸	3.66x10 ⁸	2.28x10 ⁸			
2,005	163°42'49.5"	Film 606	33.7-34.2	2.3x10 ⁹	8.69x10 ⁸	3.66x10 ⁸	2.28x10 ⁸			
2,205	163°42'49.5"	500-510	16.7-15.5	6.7x10 ⁸	4.85x10 ⁸	2.87x10 ⁸	2.47x10 ⁸			
2,505	163°42'49.5"	500-510	7.02	1.9x10 ⁸	7.97x10 ⁷	2.87x10 ⁷	2.47x10 ⁷			
2,505	163°42'49.5"	500-510	9.1-7.82	1.9x10 ⁸	7.97x10 ⁷	2.87x10 ⁷	2.47x10 ⁷			
3,004	163°42'49.5"	500-510	4.1-3.3	<10x10 ⁷	<10x10 ⁷	<10x10 ⁷	<10x10 ⁷			
3,004	163°42'49.5"	500-510	1.50	<10x10 ⁷	<10x10 ⁷	<10x10 ⁷	<10x10 ⁷			
3,004	163°42'49.5"	500-510	1.36	<10x10 ⁷	<10x10 ⁷	<10x10 ⁷	<10x10 ⁷			
3,004	163°42'49.5"	500-510	36.000	1.78x10 ¹³	4.42x10 ¹²	2.90x10 ¹²	7.30x10 ¹²			
3,004	163°42'49.5"	500-510	17,000	7.65x10 ¹²	1.80x10 ¹²	1.13x10 ¹²	3.17x10 ¹²			
3,004	163°42'49.5"	500-510	9,450	3.42x10 ¹²	8.50x10 ¹¹	5.11x10 ¹¹	1.50x10 ¹²			
1,015	120°	5-200	2,750	5.4x10 ¹¹	1.57x10 ¹¹	7.13x10 ¹¹	3.4x10 ¹¹			
1,105	70°	5-200	1,100	3.77x10 ¹¹	1.02x10 ¹¹	5.03x10 ¹⁰	1.27x10 ¹⁰			
1,200	70°	5-200	800	2.48x10 ¹¹	6.33x10 ¹⁰	3.40x10 ¹⁰	8.17x10 ⁹			
1,400	70°	5-200	400	1.24x10 ¹¹	3.16x10 ¹⁰	1.70x10 ¹⁰	4.08x10 ⁹			
1,400	70°	5-200	400	1.24x10 ¹¹	3.16x10 ¹⁰	1.70x10 ¹⁰	4.08x10 ⁹			
1,400	70°	5-200	400	1.24x10 ¹¹	3.16x10 ¹⁰	1.70x10 ¹⁰	4.08x10 ⁹			
1,500	120°	5-200	200	6.15x10 ¹⁰	1.08x10 ¹⁰	5.60x10 ⁹	1.25x10 ⁹			
1,700	120°	5-200	117	9.38x10 ⁹	3.78x10 ⁹	1.08x10 ⁹	2.38x10 ⁸			
2,000	120°	5-200	45	2.4x10 ⁹	8.6x10 ⁸	3.08x10 ⁸	6.78x10 ⁷			

Chemical.

Negligible.

Time.


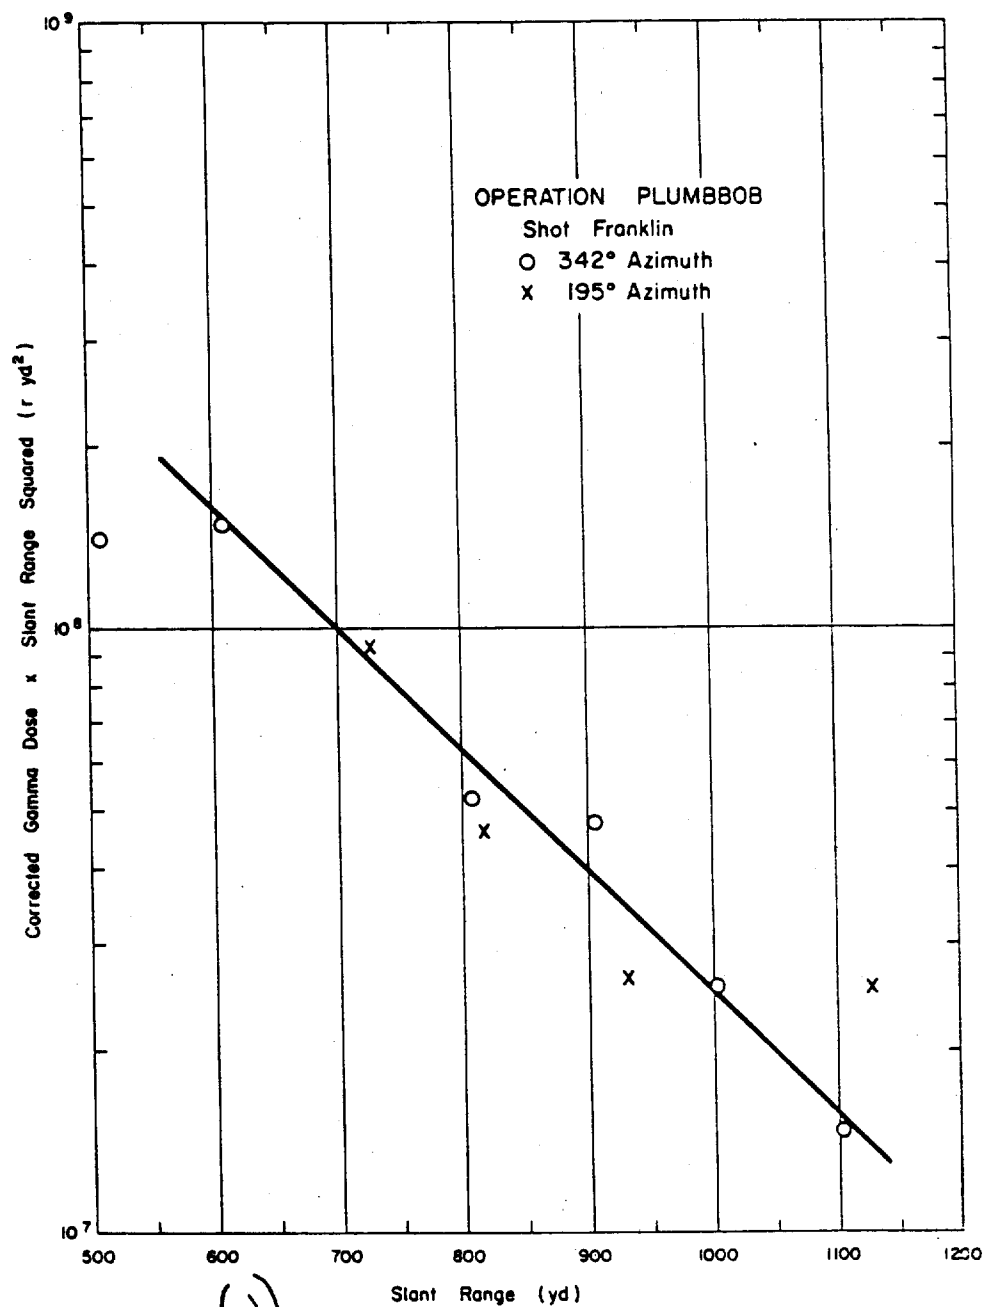


Figure 3.65 (S-PB) Operation Plumbbob - Shot Franklin - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

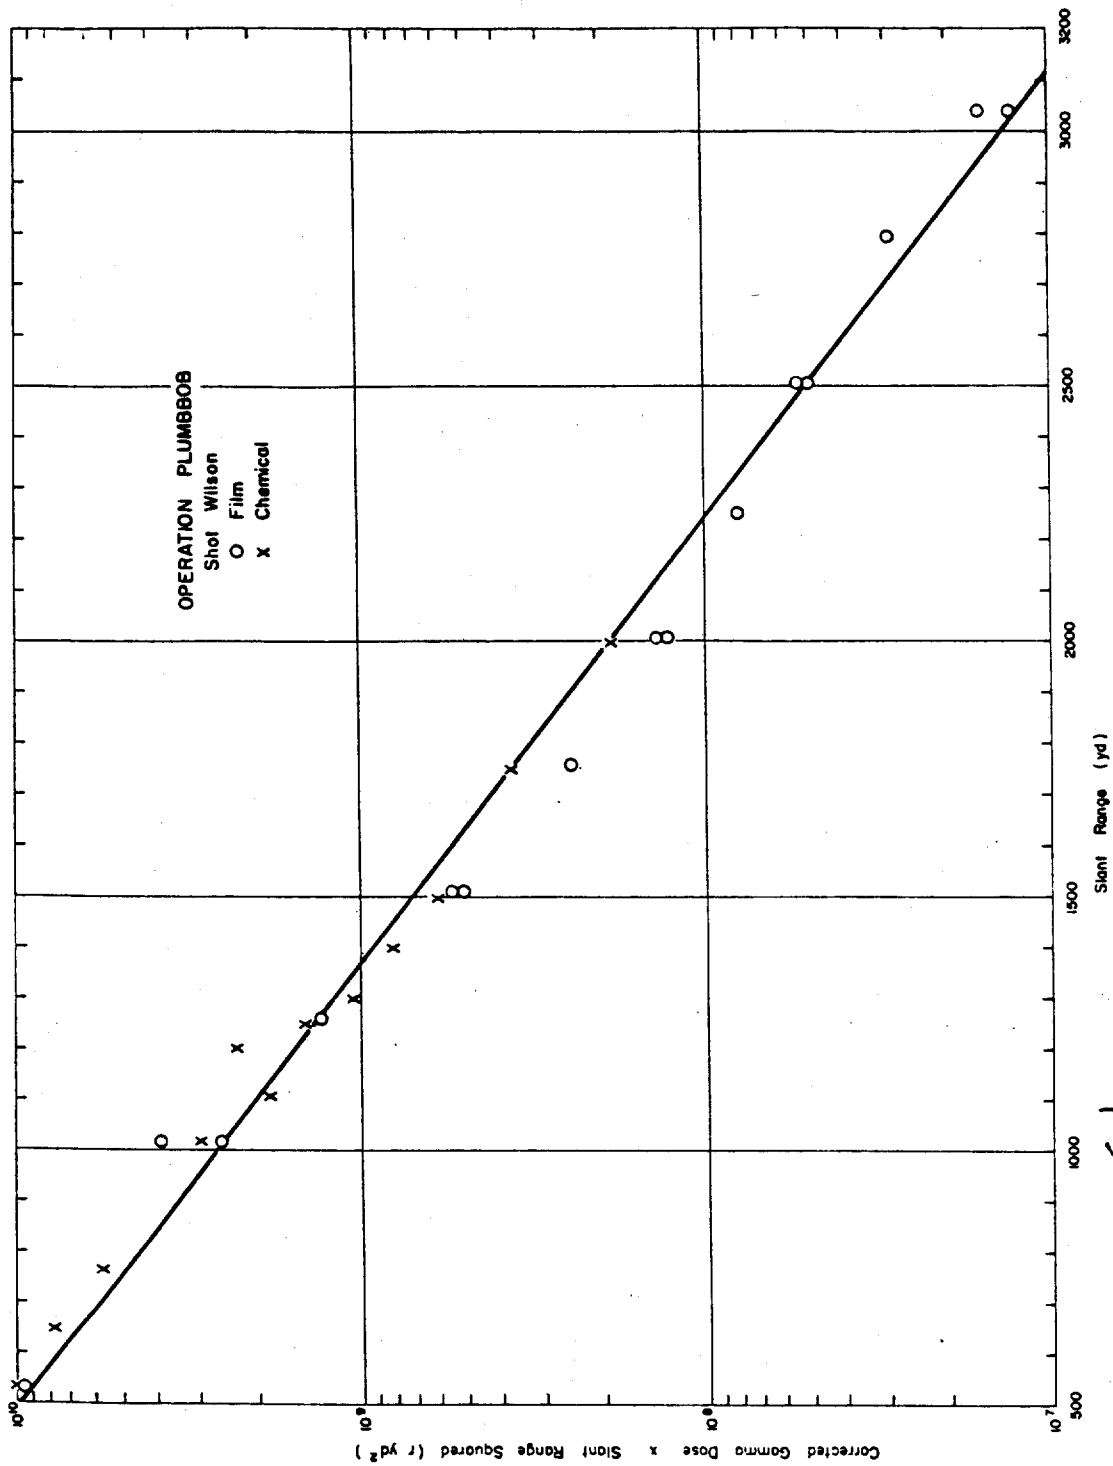

(U)

Figure 3.66 (S-10) Operation Plumbbob - Shot Wilson - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(6)

TABLE 3.97 INITIAL GAMMA DOSE DATA - OPERATIONAL PLUMBBOB, SHOT BRICKLEY

Slant Range	Azimuth	Type of Detector	Uncorrected Gamma Dose				Correction Factor				Final Corrected Gamma Dose			
			r	n/cm ²	n/cm ²	n/cm ²	r	n/cm ²	n/cm ²	n/cm ²	r	n/cm ²	n/cm ²	n/cm ²
yd														
410	a	b	300,000	1.0x10 ⁻³	1.5x10 ⁻³	2.5x10 ⁻³	500	500	500	500	314,000	16,700		
470	a	b	200,000	2.0x10 ⁻³	3.0x10 ⁻³	5.0x10 ⁻³	500	500	500	500	214,000	10,500		
500	a	b	165,000	1.5x10 ⁻³	2.0x10 ⁻³	3.0x10 ⁻³	430	430	430	430	173,000	7,900		
560	a	b	115,000	1.0x10 ⁻³	1.5x10 ⁻³	2.0x10 ⁻³	280	280	280	280	121,000	5,450		
600	a	b	60,000	5.0x10 ⁻⁴	7.0x10 ⁻⁴	1.0x10 ⁻³	150	150	150	150	62,000	2,400		
860	a	b	17,000	1.0x10 ⁻⁴	1.5x10 ⁻⁴	2.0x10 ⁻⁴	350	350	350	350	17,000	563		
1,000	a	b	7,000	6.0x10 ⁻⁵	9.0x10 ⁻⁵	1.0x10 ⁻⁴	170	170	170	170	7,300	234		
1,383	a	b	1,290	6.8x10 ⁻⁵	1.0x10 ⁻⁴	1.5x10 ⁻⁴	1,290	1,290	1,290	1,290	1,380	14.3		
1,477	a	b	740	4.2x10 ⁻⁵	6.0x10 ⁻⁵	8.0x10 ⁻⁵	1,100	1,100	1,100	1,100	769	169		
1,773	a	b	162	9.0x10 ⁻⁶	1.0x10 ⁻⁴	1.5x10 ⁻⁴	0.250	0.250	0.250	0.250	163	169		

*270°
Chemical.
Negligible.
DORU Bear Mag with lithium.

(6)

TABLE 3.97 INITIAL GAMMA DOSE DATA - OPERATIONAL PLUMBBOB, SHOT HODD

Slant Range	Azimuth	Type of Detector	Uncorrected Gamma Dose				Correction Factor				Final Corrected Gamma Dose			
			r	n/cm ²	n/cm ²	n/cm ²	r	n/cm ²	n/cm ²	n/cm ²	r	n/cm ²	n/cm ²	n/cm ²
yd														
707	a	Film 545	>70,000	3.0x10 ⁻³	1.0x10 ⁻³	4.0x10 ⁻³	34,500	34,500	34,500	34,500	45,210	16,000		
1,119	a	Film 545	17,500	3.5x10 ⁻³	1.0x10 ⁻³	5.0x10 ⁻³	3,500	3,500	3,500	3,500	5,225	1,450		
1,560	a	Film 545	2,000	3.0x10 ⁻³	1.0x10 ⁻³	5.0x10 ⁻³	214	214	214	214	1,800	115		
2,003	a	Film 545	305.0	4.0x10 ⁻³	1.0x10 ⁻³	5.0x10 ⁻³	6.00	6.00	6.00	6.00	29.7	12.7		
2,548	a	Film 545	64.7	4.3x10 ⁻³	1.0x10 ⁻³	5.0x10 ⁻³	0.77	0.77	0.77	0.77	3.57	69.7		
3,073	a	Film 510	11.7	5.2x10 ⁻³	1.0x10 ⁻³	5.0x10 ⁻³	0.11	0.11	0.11	0.11	0.40	12.1		
3,613	a	Film 510	3.8	5.0x10 ⁻³	1.0x10 ⁻³	5.0x10 ⁻³	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 1.54		
902	b	F	50,700	1.1x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	500	500	500	500	366	4,610		
1,116	b	F	17,600	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	111	111	111	111	111	1,440		
1,345	b	F	6,400	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	40.1	40.1	40.1	40.1	40.1	400		
1,570	b	F	2,090	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	13.4	13.4	13.4	13.4	13.4	115		
2,003	b	F	900	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	4.30	4.30	4.30	4.30	4.30	44.0		
2,548	b	F	243	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	1.34	1.34	1.34	1.34	1.34	12.7		
3,073	b	F	50	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	0.83	0.83	0.83	0.83	0.83	9.1		
3,613	b	F	140	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	0.44	0.44	0.44	0.44	0.44	5.7		
2,554	b	F	140	1.0x10 ⁻³	1.0x10 ⁻³	1.0x10 ⁻³	0.31	0.31	0.31	0.31	0.31	156		

*270°
Chemical.
Negligible.
DORU Bear Mag with lithium.

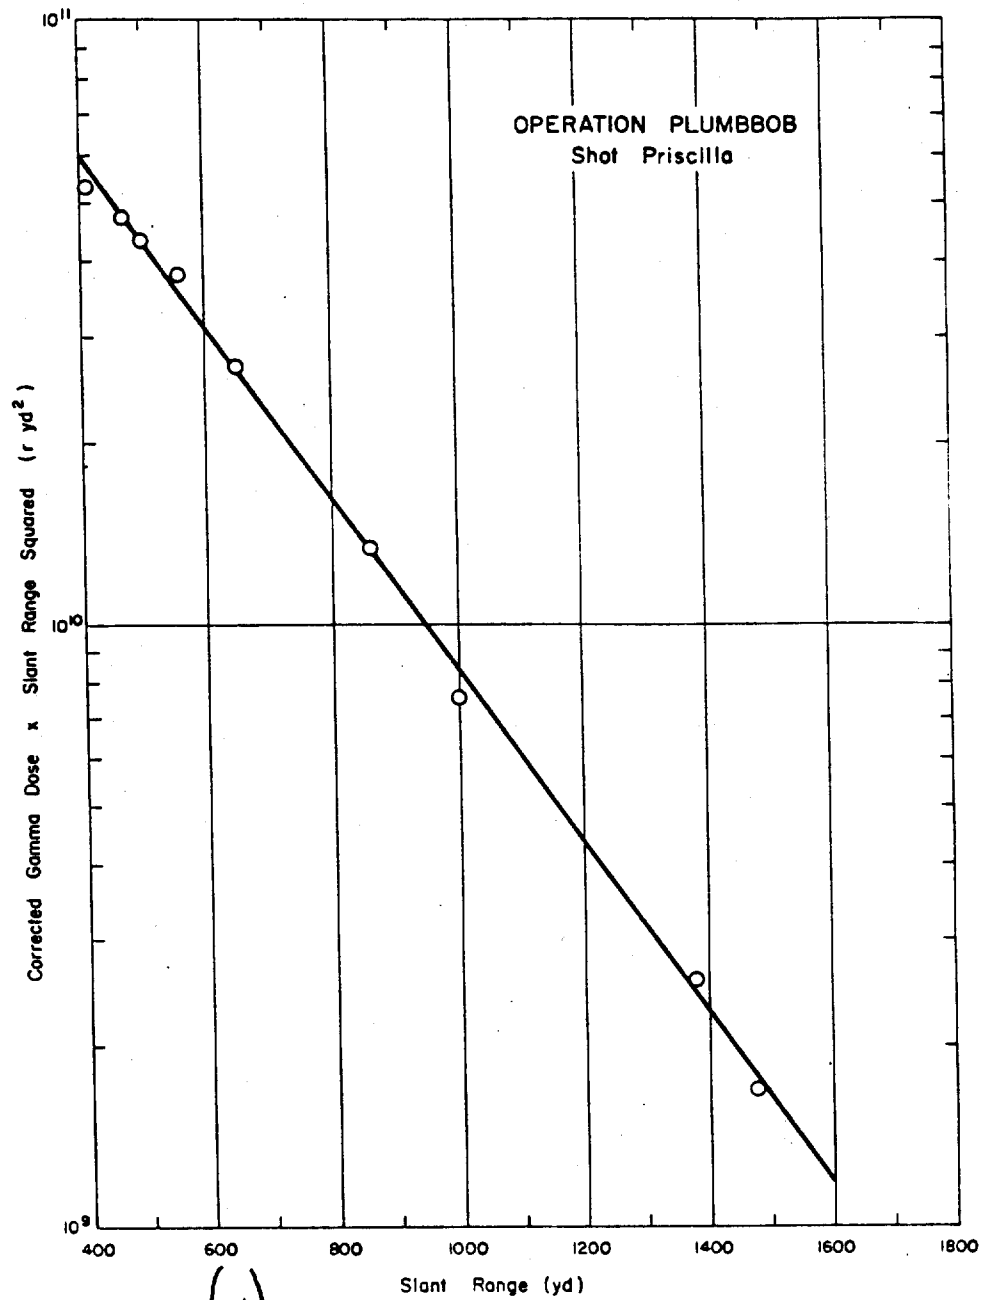


Figure 3.67 (U) Operation Plumbbob - Shot Priscilla - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

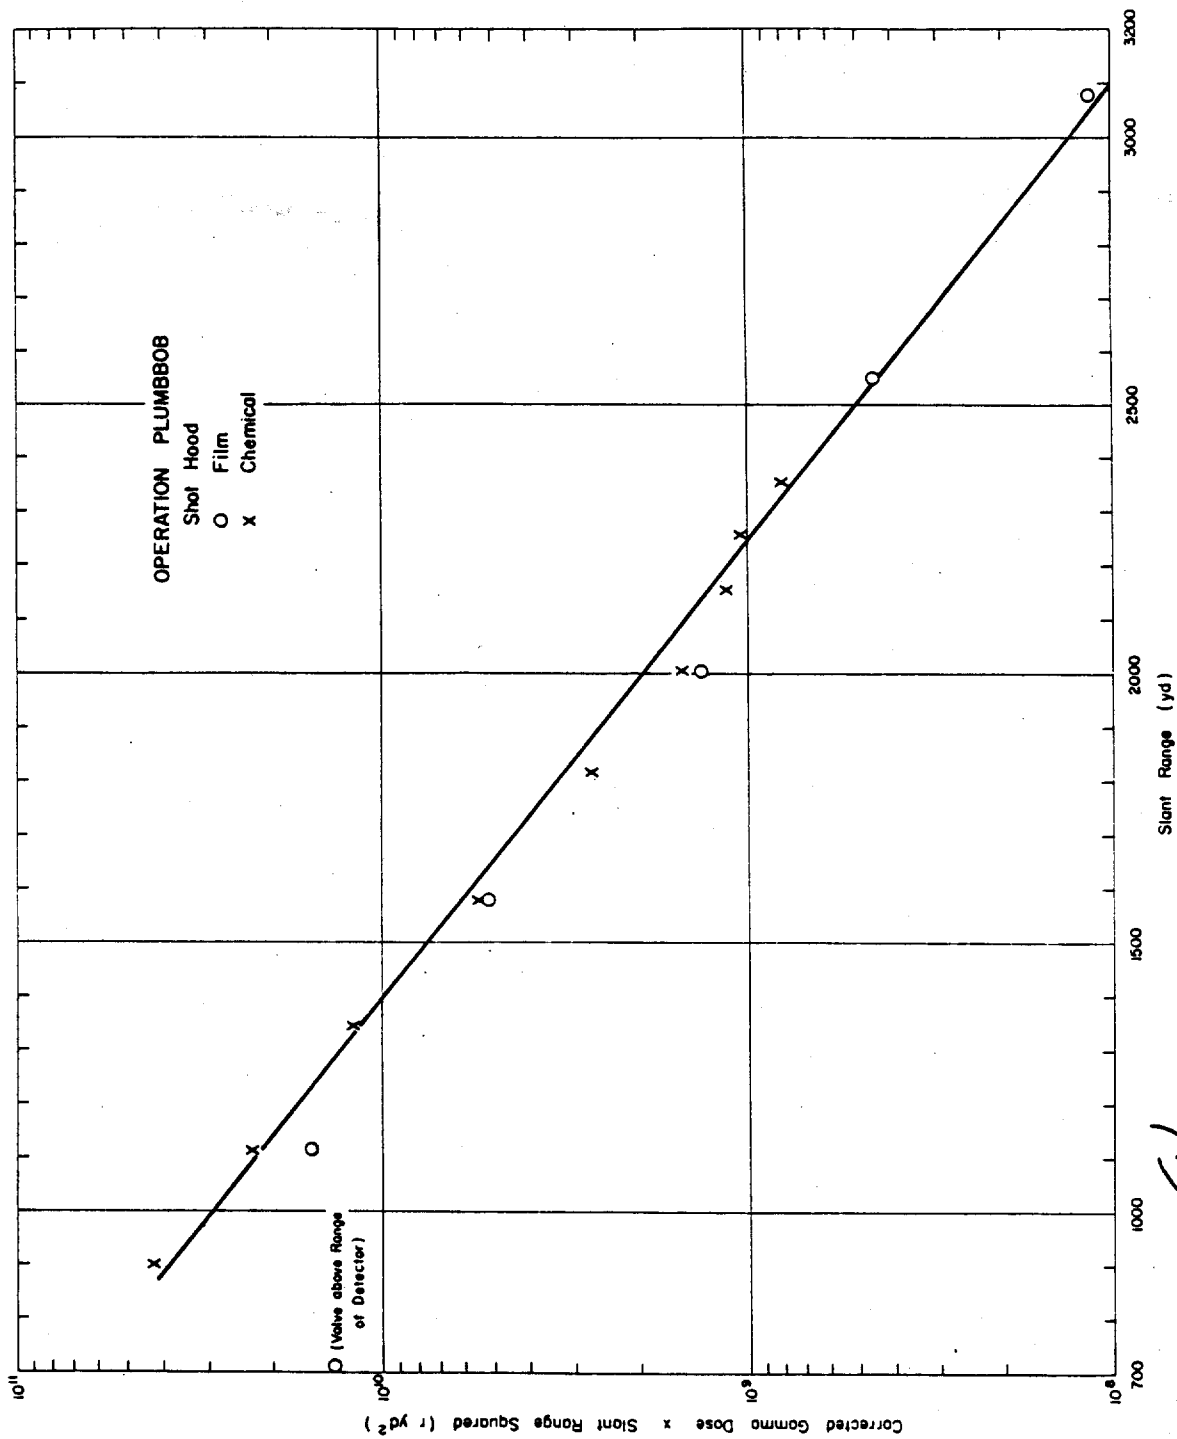


Figure 3.68 (8-RD) Operation Plumbbob - Shot Hood - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

(U) TABLE 3.98 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT DIABLO

Slant Range	Azimuth	Type Detector	Uncorrected Gamma Dose	Neutron Flux			Shield Type
				Au	Pu	U S	
yd			r	n/cm ²			
749	90°	Chemical	8,500	a			Beer Mug w/Li
1,013	90°	Chemical	1,850	a			Beer Mug w/Li
1,212	90°	Chemical	740	a			Beer Mug w/Li
1,510	90°	Chemical	213	a			Whitney Tower
1,679	90°	Film 606	77	a			Whitney Tower
1,679	90°	Chemical	64	a			Shasta Tower
2,714	90°	Film 505	1.85	a			Shasta Tower

^aNo neutron data available.

(U) TABLE 3.99 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT KEYSER

Slant Range	Azimuth	Type Detector	Uncorrected Gamma Dose	Neutron Flux			Shield Type
				Au	Pu	U S	
yd			r	n/cm ²			
527	90°	Chemical	7,200	a			Beer Mug w/Li
1,013	90°	Chemical	295	a			Beer Mug w/Li
1,510	90°	Chemical	36	a			Beer Mug w/Li

^aInsufficient neutron data to extrapolate to slant ranges of interest.

(U) TABLE 3.100 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT OMENS

Slant Range	Azimuth	Detector Type	Uncorrected Gamma Dose	Neutron Flux			Past Correction	Shield Type	Shield Correction	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Corrected Gamma Dose	Soil Contribution
				Au	Pu	U								
yd			r	n/cm ²	n/cm ²	n/cm ²	r				r	r	r	r
260	a	Chemical	176,000 ^c	1.56x10 ⁴	1.17x10 ⁵	7.66x10 ⁴	1.45x10 ⁴	e	71,000	71,000	105,000	1.25	131,000	156,000
343	a	Chemical	129,000 ^c	1.21x10 ⁴	4.77x10 ⁴	2.46x10 ⁴	8.0x10 ³	e	42,000	42,000	83,900	1.25	105,000	62,400
433	a	Chemical	72,000 ^c	4.67x10 ³	2.44x10 ⁴	9.57x10 ³	4.3x10 ³	e	17,000	17,000	54,700	1.25	68,400	28,600
527	a	Film 505	70,000	2.71x10 ³	9.65x10 ³	5.51x10 ³	1.7x10 ³	d	3,080	33,200	2,000	1.23	2,000	11,500
1,014	a	Film 505	4,200	9.35x10 ¹	5.0x10 ²	2.82x10 ²	7.9x10 ¹	f	106	1,760	2,460	1.23	2,460	460
1,279	a	Film 606	420	6.59x10 ¹	4.6x10 ²	2.68x10 ²	5.4x10 ¹	f	15.0	22.1	35.9	1.16	41.0	34
1,606	a	Film 606	54.5	5.96x10 ⁰	5.22x10 ¹	3.35x10 ¹	5.22x10 ⁰	f	1.40	2.40	2.30	1.16	2.30	3.0
2,505	a	Film 510	7.1, 10.2	6.0x10 ⁰	6.6x10 ⁰	4.46x10 ⁰	5.26x10 ⁰	f	0.15	0.13	0.10	1.16	10.5	10.8

^a1.56x10⁴, 1.17x10⁵, 7.66x10⁴, 1.45x10⁴, 4.77x10⁴, 2.46x10⁴, 9.57x10³, 4.3x10³, 5.51x10³, 2.82x10², 5.4x10¹, 3.35x10¹, 5.22x10⁰, 4.46x10⁰, 5.26x10⁰.
^bUncorrected neutron corrections were subtracted before the gamma results were reported.
^cUncorrected neutron corrections were subtracted before the gamma results were reported.
^dInsufficient neutron data to extrapolate to slant ranges of interest.

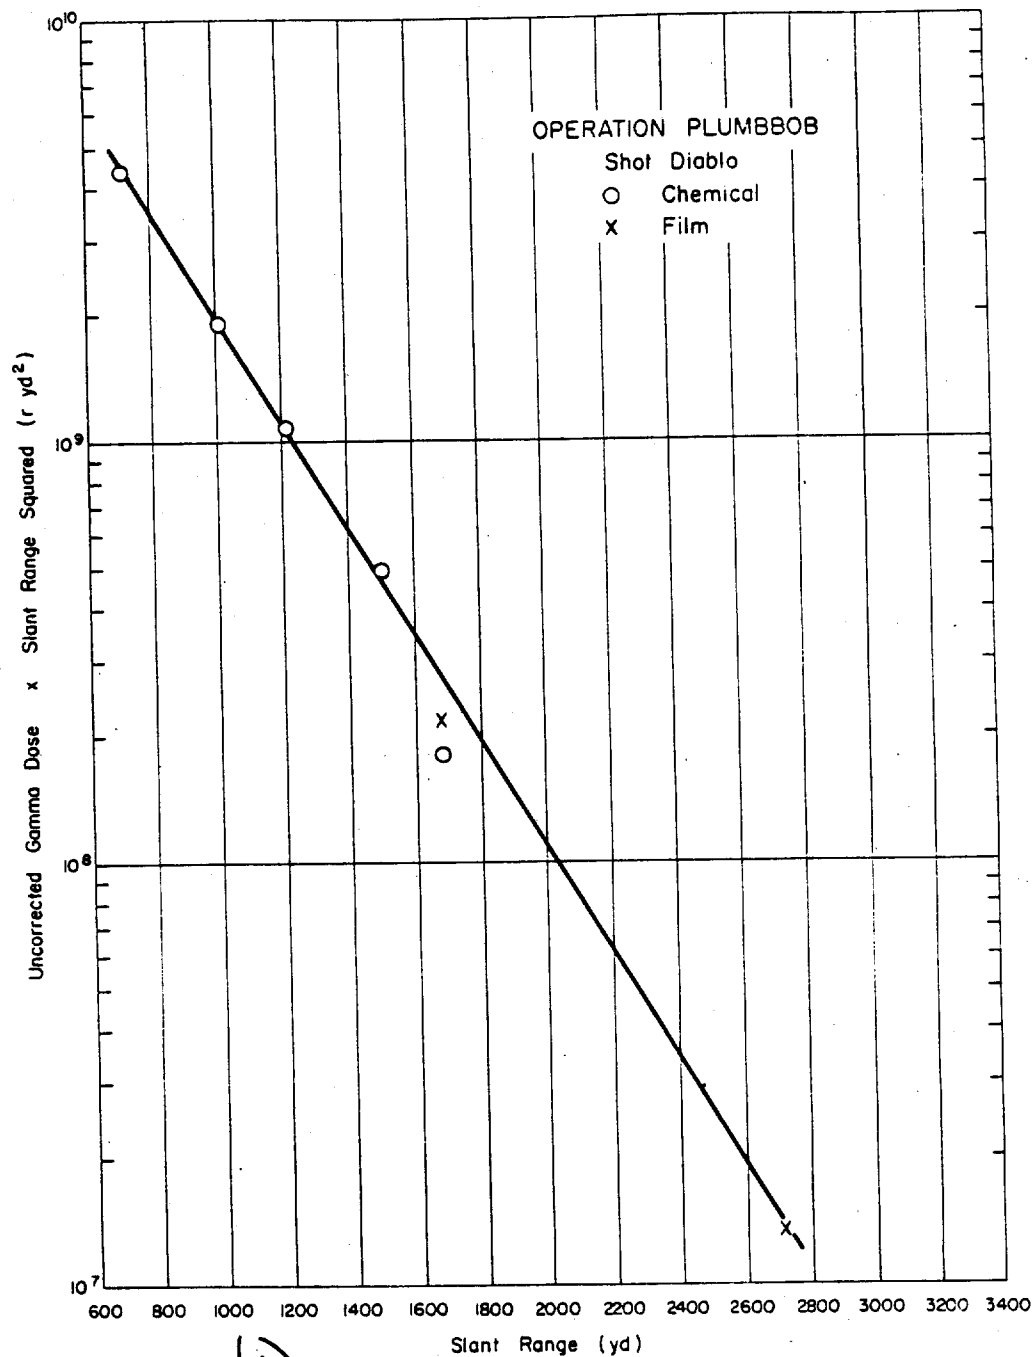


Figure 3.69 (S-RD) Operation Plumbbob - Shot Diablo - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).


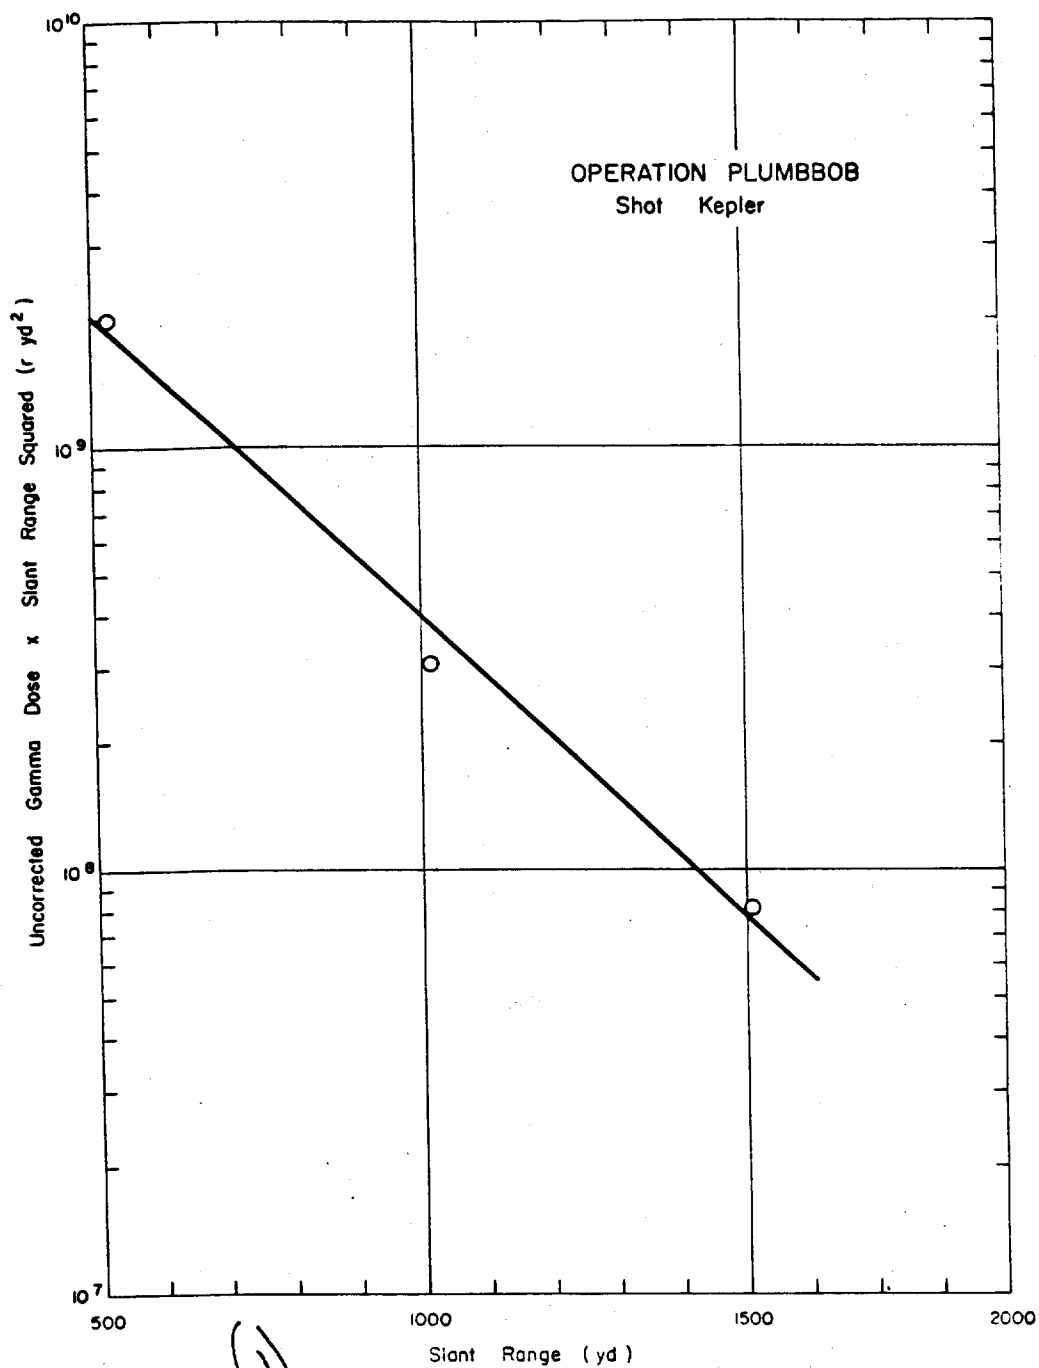


Figure 3.70 (S-PD) Operation Plumbbob - Shot Kepler - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

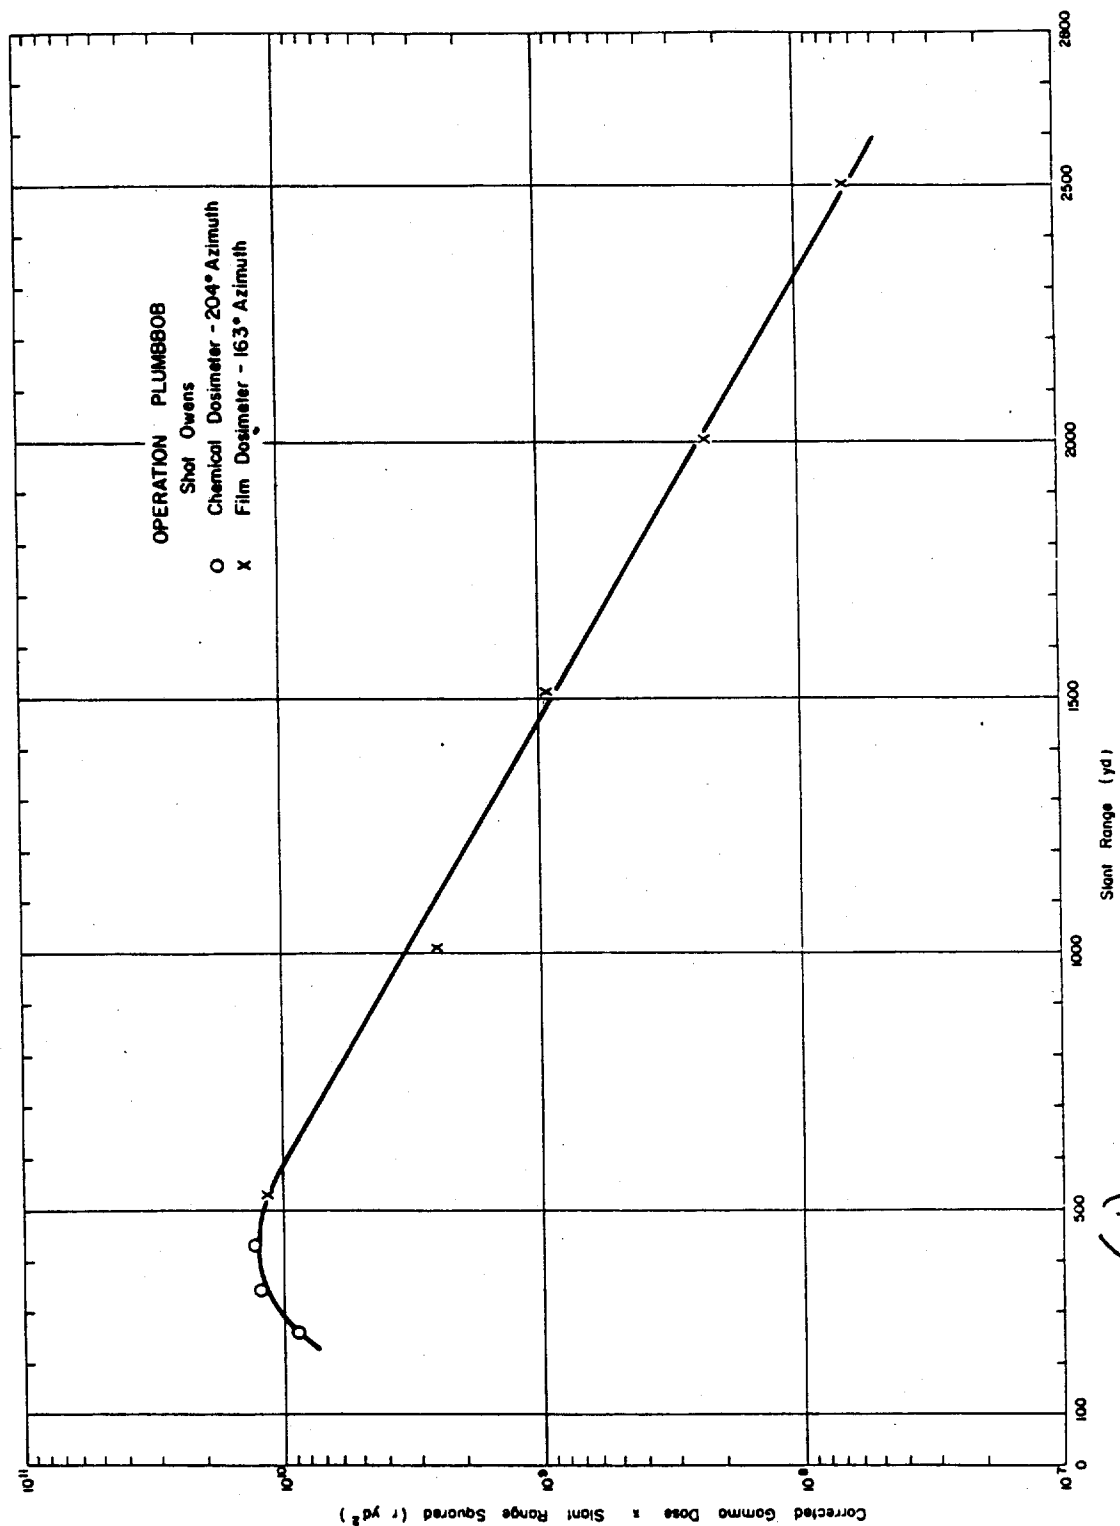

(U) Figure 3.71 (S-RD) Operation Plumbbob - Shot Owens - Corrected gamma-dose-times-slant-range squared versus slant-range (U).

(U) TABLE 3.101 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT STOKES

Shot Azimuth Range	Type of Detector	Uncorrected Gamma Dose			Neutron Flux			Au Correction Factor	Pu Correction Factor	Neutron Flux			Au Correction Factor	Pu Correction Factor	Final Corrected Gamma Dose			Soil Contribution
		r	f	n/cm ²	Au	Pu	U			r	f	n/cm ²			r	f	n/cm ²	
725	a	10,000	d	5.37x10 ¹²	1.17x10 ¹²	1.47x10 ¹²	3.27x10 ¹²	d	d	22.0	d	93.0	d	d	19,300	1.05	30,400	1,960
941	a	12,400	b	2.16x10 ¹²	8.10x10 ¹¹	4.05x10 ¹¹	1.37x10 ¹²	d	d	62.0	d	62.0	d	d	12,400	1.05	13,000	1,150
946	a	7,300	b	1.35x10 ¹²	4.50x10 ¹¹	2.13x10 ¹¹	8.94x10 ¹¹	d	d	39.0	d	39.0	d	d	7,310	1.05	7,630	649
1,030	a	4,300	b	8.02x10 ¹¹	2.83x10 ¹¹	1.41x10 ¹¹	5.21x10 ¹¹	d	d	23.0	d	23.0	d	d	4,890	1.05	5,120	382
1,115	a	3,200	b	4.50x10 ¹¹	1.60x10 ¹¹	7.20x10 ¹⁰	3.04x10 ¹¹	d	d	14.0	d	14.0	d	d	3,190	1.04	3,320	200
1,365	a	1,025	b	1.37x10 ¹¹	4.39x10 ¹⁰	2.09x10 ¹⁰	9.87x10 ¹⁰	d	d	3.90	d	3.90	d	d	1,021	1.04	1,062	55.3
1,480	a	390	b	4.40x10 ¹⁰	1.20x10 ¹⁰	6.00x10 ⁹	2.80x10 ¹⁰	d	d	1.27	d	1.27	d	d	399	1.04	405	14.8

a. d. f. n. are estimated.
 b. c. g. h. i. are negligible.
 e. g. h. i. are negligible with lithium.

(U) TABLE 3.102 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT SHASTA

Shot Range	Azimuth	Uncorrected Gamma Dose			Neutron Flux			Shield Type	Attenuation Factor
		r	f	n/cm ²	Au	Pu	U		
765	a	1112	d	1112	d	d	d	b	1.0
1,014	a	1112	d	1112	d	d	d	b	1.0
1,240	a	606	d	606	d	d	d	b	1.0
1,509	a	510,606	d	510,606	d	d	d	b	1.0

a. d. f. n. are estimated.
 b. c. g. h. i. are negligible with lithium.

(U) TABLE 3.103 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT DOPPLER

Shot Azimuth Range	Type of Detector	Uncorrected Gamma Dose			Neutron Flux			Au Correction Factor	Pu Correction Factor	Final Corrected Gamma Dose			Soil Contribution							
		r	f	n/cm ²	Au	Pu	U			r	f	n/cm ²								
722	a	11,000	d	5.37x10 ¹²	8.66x10 ¹²	3.59x10 ¹²	1.63x10 ¹²	c	c	d	d	22.0	d	93.0	d	d	19,300	1.05	30,400	1,960
941	a	12,400	b	2.16x10 ¹²	4.90x10 ¹²	2.77x10 ¹²	9.95x10 ¹¹	c	c	d	d	62.0	d	62.0	d	d	12,400	1.05	13,000	1,150
946	a	7,300	b	1.35x10 ¹²	3.11x10 ¹²	1.59x10 ¹²	6.19x10 ¹¹	c	c	d	d	39.0	d	39.0	d	d	7,310	1.05	7,630	649
1,030	a	4,300	b	8.02x10 ¹¹	1.99x10 ¹²	8.71x10 ¹¹	3.77x10 ¹¹	c	c	d	d	23.0	d	23.0	d	d	4,890	1.05	5,120	382
1,115	a	3,200	b	4.50x10 ¹¹	1.04x10 ¹²	4.70x10 ¹¹	2.23x10 ¹¹	c	c	d	d	14.0	d	14.0	d	d	3,190	1.04	3,320	200
1,365	a	1,025	b	1.37x10 ¹¹	3.49x10 ¹¹	1.69x10 ¹¹	7.98x10 ¹⁰	c	c	d	d	3.90	d	3.90	d	d	1,021	1.04	1,062	55.3
1,480	a	390	b	4.40x10 ¹⁰	8.99x10 ¹⁰	4.40x10 ¹⁰	2.08x10 ¹⁰	c	c	d	d	1.27	d	1.27	d	d	399	1.04	405	14.8

a. d. f. n. are estimated.
 b. c. g. h. i. are negligible with lithium.

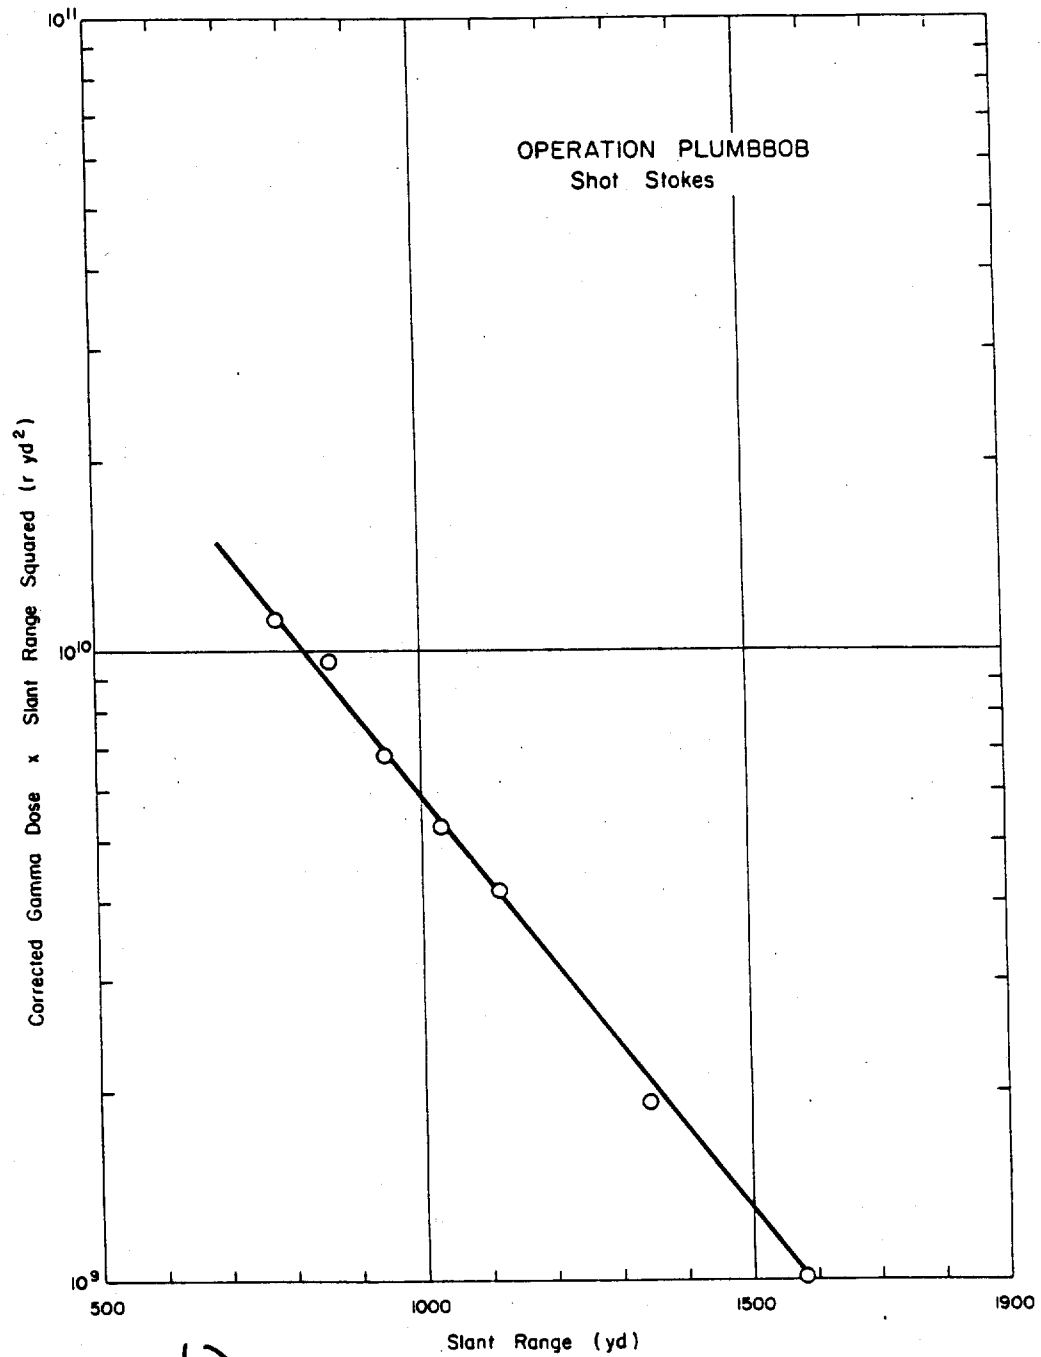


Figure 3.72 (S-RD) Operation Plumbbob - Shot Stokes - Corrected gamma-dose-times-slant-range-squared versus slant range (U).

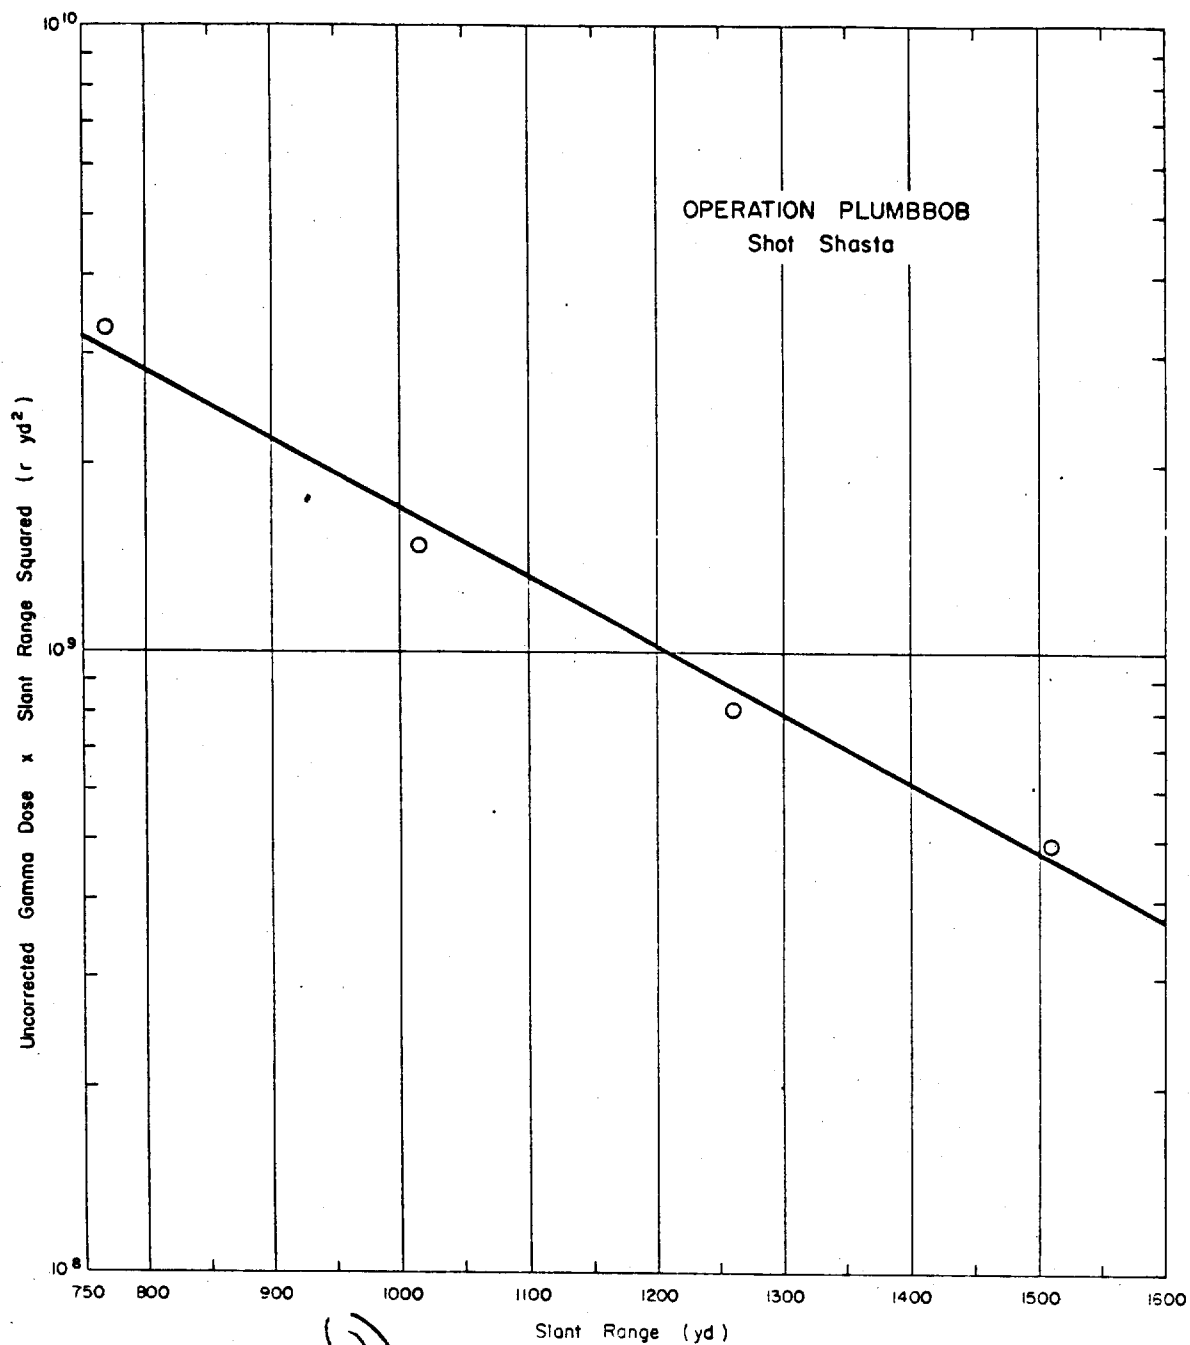


Figure 3.73 (S-PD) Operation Plumbbob - Shot Shasta - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

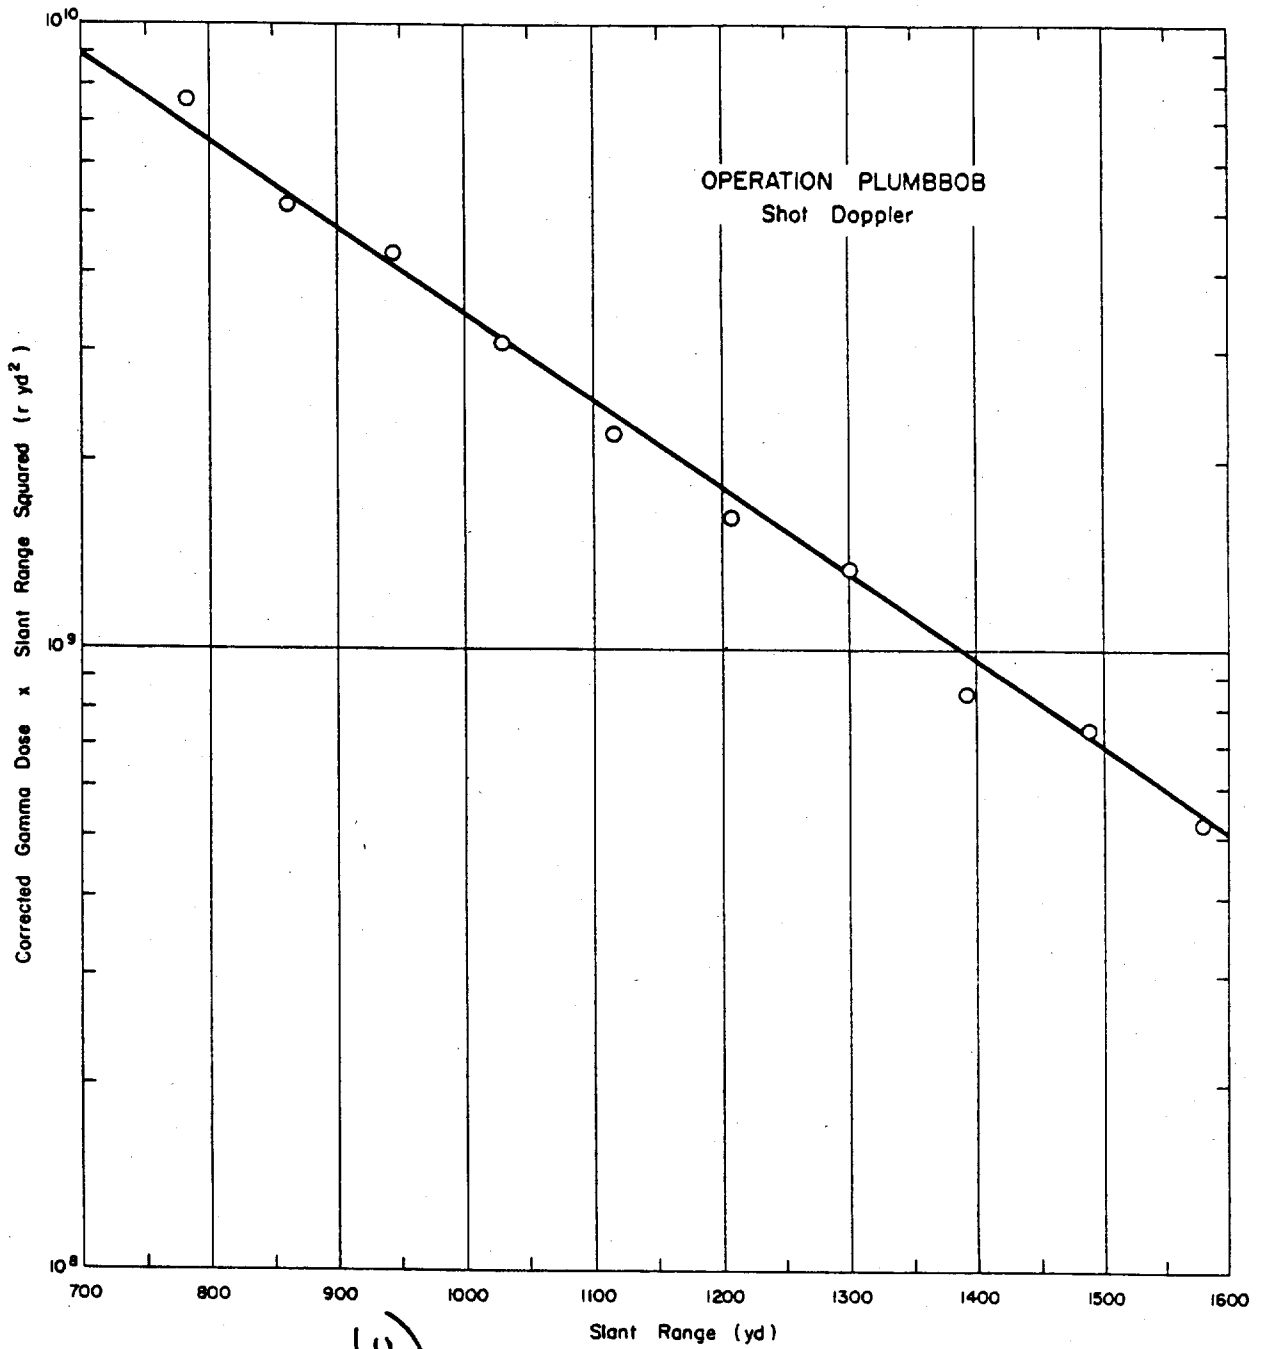


Figure 3.74 (U) Operation Plumbbob - Shot Doppler -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

TABLE 3.104 INITIAL GAMMA DOSE DATA - OPERATION FLUORBOR, SHOT FRANKLIN FIRE

Slant Azi- Range muth	Type of Detector	Uncor- rected Gamma Dose	Neutron Flux				Final			
			Au		Pu		Au		Pu	
			r	n/cm ²	r	n/cm ²	r	n/cm ²	r	n/cm ²
yd										
560 a	b	11,522	2.5x10 ¹²	2.55x10 ¹²	4.4x10 ¹²	1.7x10 ¹²	73.4	11,600	1.05	12,150
560 a	b	7,050	1.2x10 ¹²	5.3x10 ¹²	2.1x10 ¹²	8.9x10 ¹¹	58.3	7,010	1.05	7,360
744 a	b	3,840	7.0x10 ¹¹	2.7x10 ¹²	1.0x10 ¹²	4.0x10 ¹¹	20.2	3,820	1.05	4,010
937 a	b	2,000	3.8x10 ¹¹	1.4x10 ¹²	5.6x10 ¹¹	2.7x10 ¹¹	11.0	1,990	1.05	2,090
934 a	b	1,175	2.6x10 ¹¹	8.0x10 ¹¹	3.1x10 ¹¹	1.4x10 ¹¹	6.00	1,163	1.05	1,227
1,031 a	b	770	1.29x10 ¹¹	4.7x10 ¹¹	1.8x10 ¹¹	8.4x10 ¹⁰	3.71	766	1.05	804
1,275 a	b	232	3.0x10 ¹⁰	1.2x10 ¹¹	4.6x10 ¹⁰	2.15x10 ¹⁰	0.88	231	1.04	240

a. 160°.
b. Chemical.
c. Negligible.
d. Beer Mag with Lithium.

TABLE 3.105 INITIAL GAMMA DOSE DATA - OPERATION FLUORBOR, SHOT SMOKEY

Slant Azi- Range muth	Type of Detector	Uncor- rected Gamma Dose	Neutron Flux				Final			
			Au		Pu		Au		Pu	
			r	n/cm ²	r	n/cm ²	r	n/cm ²	r	n/cm ²
yd										
651 a	b	47,000	8.3x10 ¹²	2.9x10 ¹³	2.5x10 ¹³	3.6x10 ¹²	239	46,800	1.05	49,100
691 a	b	37,000	6.2x10 ¹²	2.0x10 ¹³	1.6x10 ¹³	2.7x10 ¹²	150	36,800	1.05	38,600
755 a	b	25,000	3.6x10 ¹²	1.3x10 ¹³	8.8x10 ¹²	1.7x10 ¹²	106	24,900	1.05	26,100
810 a	b	19,000	2.7x10 ¹²	9.6x10 ¹²	6.2x10 ¹²	1.1x10 ¹²	79.2	18,900	1.05	19,800
841 a	b	13,500	-	7.4x10 ¹²	6.92x10 ¹²	9.8x10 ¹¹	-	-	1.05	-
887 a	b	15,500	-	-	-	-	-	-	1.05	-
980 a	b	9,800	-	-	-	-	-	-	1.05	-
990 a	b	4,300	-	-	-	-	-	-	1.05	-
1,001 a	b	5,400	-	-	-	-	-	-	1.05	-
1,026 a	b	6,600	-	-	-	-	-	-	1.05	-
1,093 a	b	5,700	-	-	-	-	-	-	1.05	-
1,164 a	b	4,300	-	-	-	-	-	-	1.05	-
1,203 a	b	2,500	-	-	-	-	-	-	1.05	-
1,421 a	b	1,175	-	-	-	-	-	-	1.05	-
1,615 a	b	500	-	-	-	-	-	-	1.05	-
1,816 a	b	230	-	-	-	-	-	-	1.05	-

a. 160°.
b. Chemical.
c. These certain effects were very pronounced, the neutron data cannot be extrapolated to the center of the detector.
d. Beer Mag with Lithium.

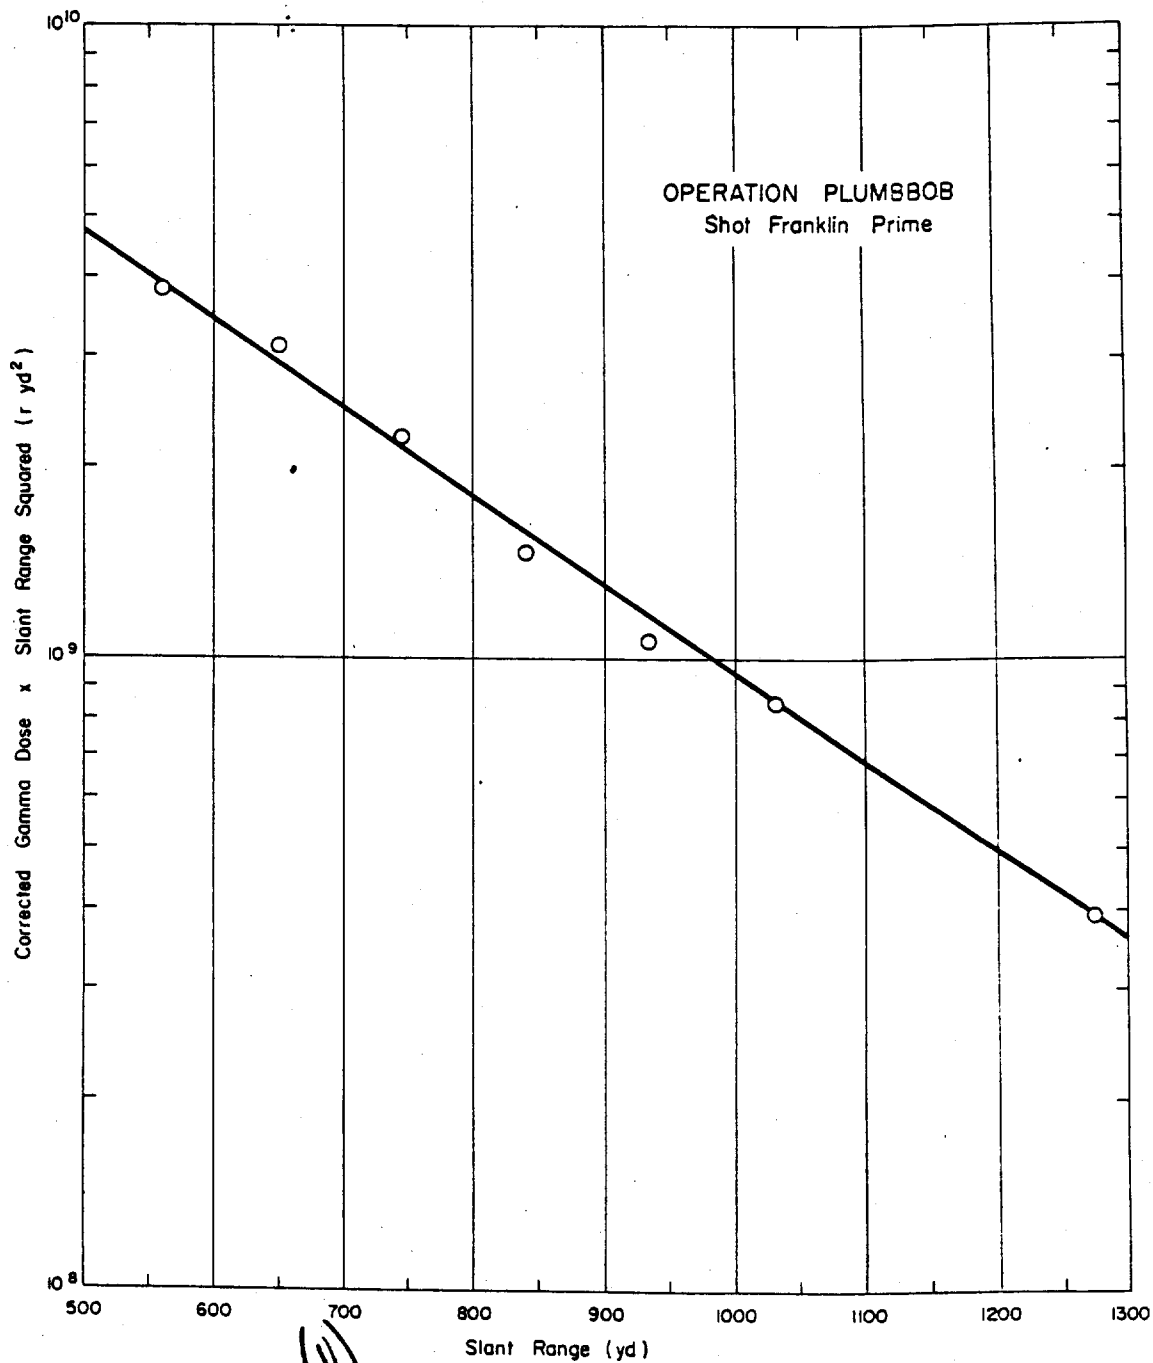


Figure 3.75 (U) Operation Plumbbob - Shot Franklin Prime -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

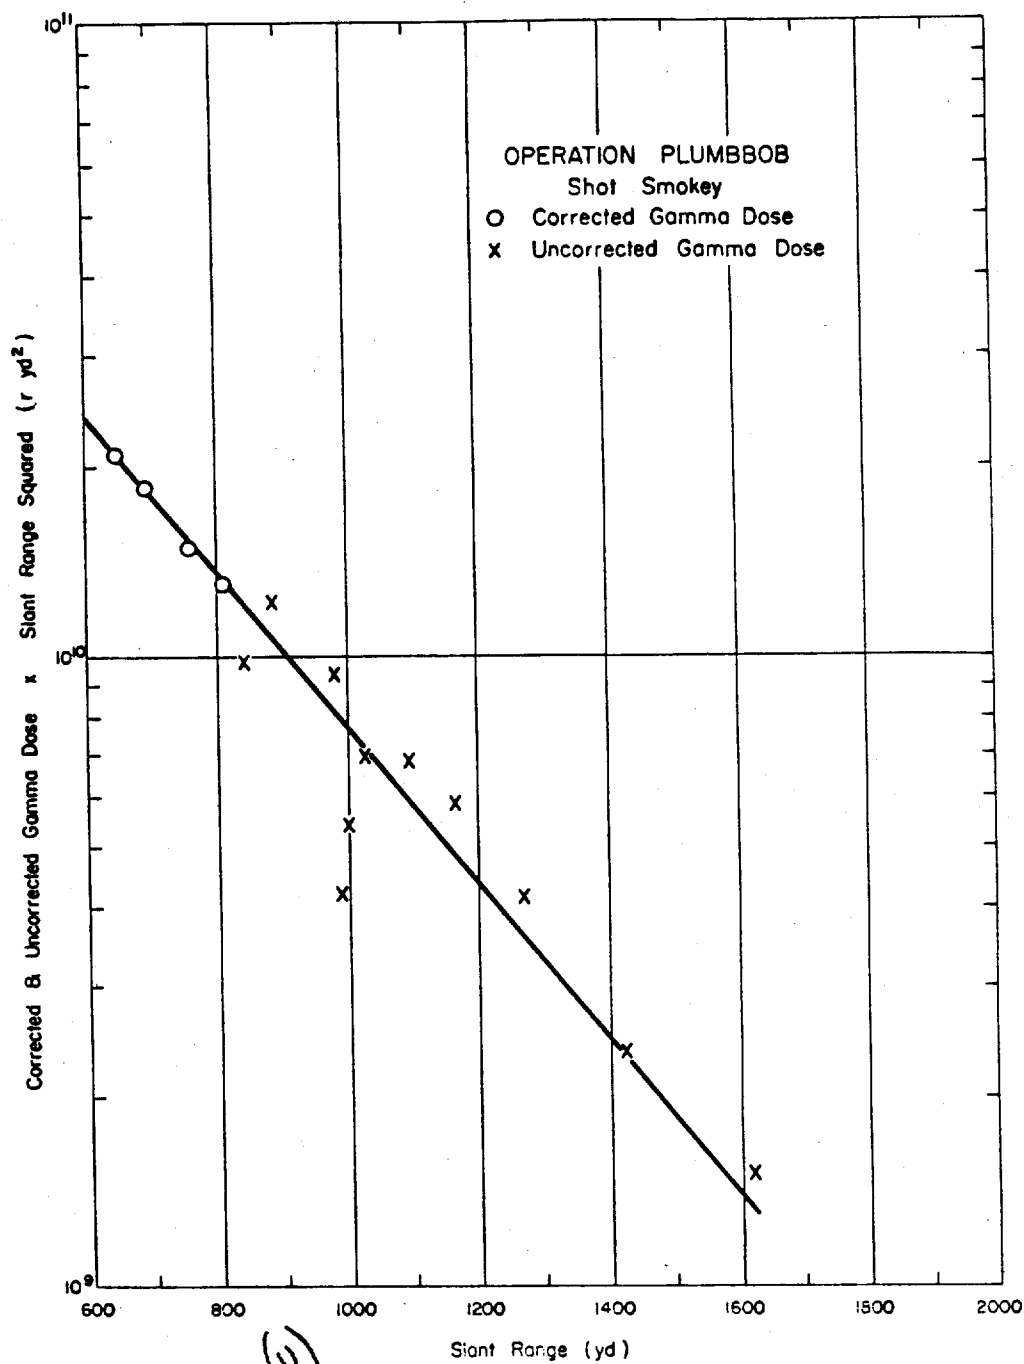


Figure 3.76 (S-ED) (U) Operation Plumbbob - Shot Smokey -
Corrected and Uncorrected gamma-dose-
times-slant-range squared versus-slant
range (U).

(U) TABLE 3.106 INITIAL GAMMA DOSE DATA - OPERATION PLUMBOW, SHOT CALLEJO

Slant Range yd	Azimuth	Film Type	Uncorrected Gamma Dose	Neutron Flux				Shield Type
				Au n/cm^2	Pu n/cm^2	Np n/cm^2	U n/cm^2	S n/cm^2
1,228	90°	1112, 606	r					
1,326	90°	1112, 606	363.8				No neutron data available	a
1,442	90°	510	282.2				No neutron data available	a
1,624	90°	510	106.7				No neutron data available	a
1,673	90°	510	79.0				No neutron data available	a
2,012	90°	510	69.8				No neutron data available	a
2,128	90°	502, 510	23.0				No neutron data available	a
2,222	90°	502	14.1				No neutron data available	a
3,102	90°	502	11.5				No neutron data available	a
			0.68				No neutron data available	a

*EKG film badge attached to stake.

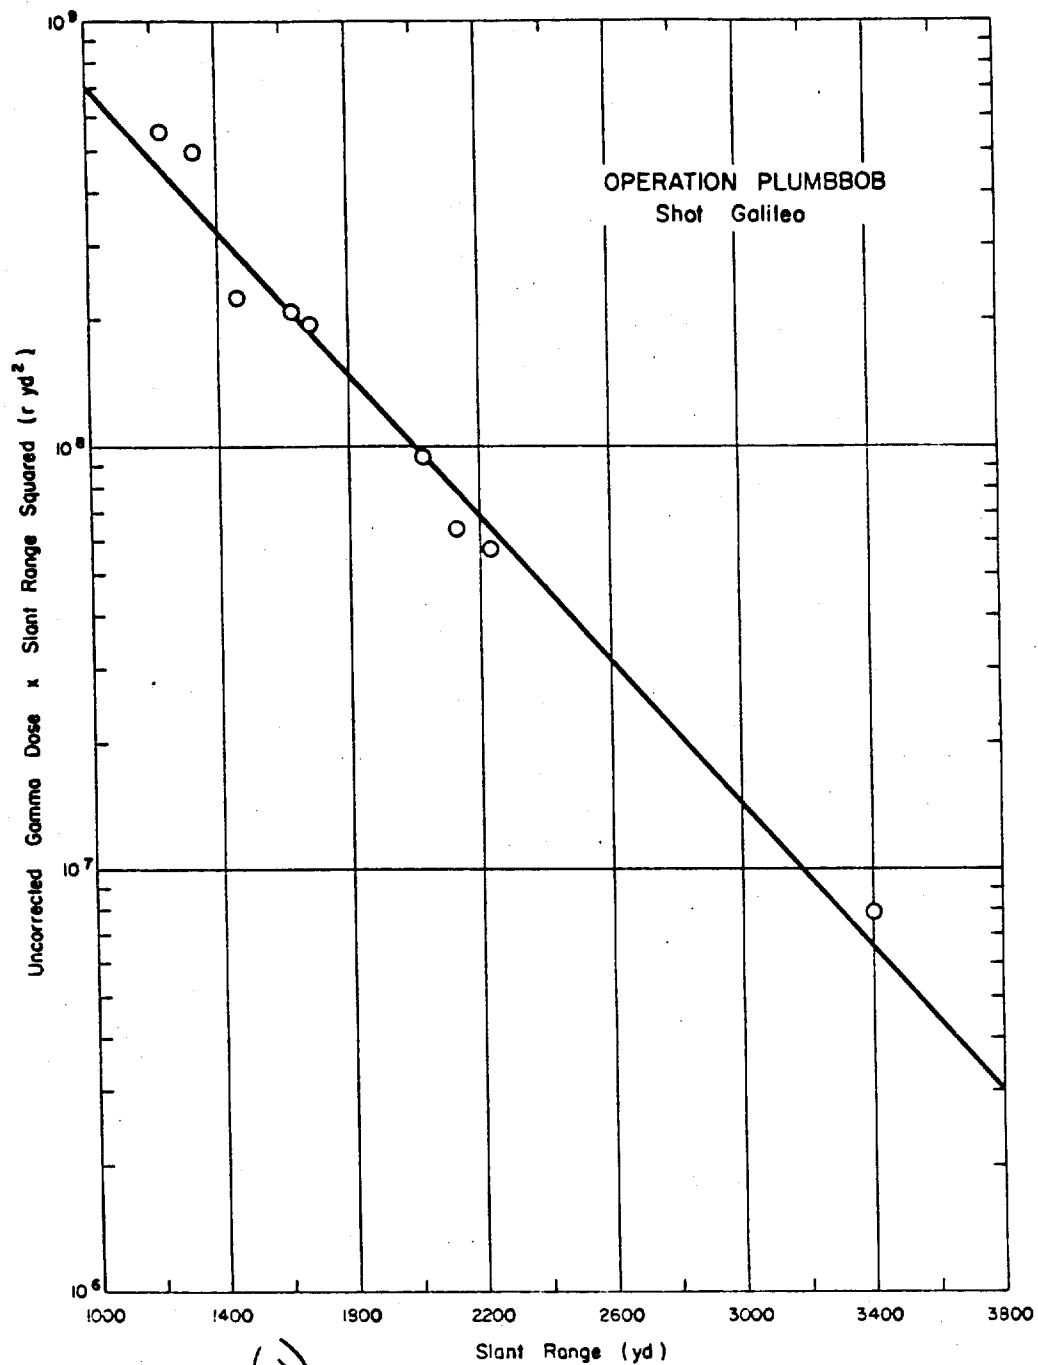


Figure 3.77 (S-PD) Operation Plumbbob - Shot Galileo -
Uncorrected gamma-dose-times-slant-range-
squared versus slant-range (U).

(U) TABLE 3.107 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT 1A14ACX

Slant Azi- Range with	Type of Detector	Uncor- rected Gamma Dose	Neutron Flux				Au Correc- tion	Past Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contri- bution
			Au	Pu	Np	U									
yd		r	n/cm ²	n/cm ²	n/cm ²	n/cm ²		r	c	f	r	r	r	r	r
558	Chemical	3300	1.81x10 ⁻²	4.76x10 ⁻²	2.55x10 ⁻²	4.48x10 ⁻²	b	b	c	51.6	51.6	3850	1.05	4040	686
790	Chemical	680	3.21x10 ⁻¹	8.97x10 ⁻¹	4.81x10 ⁻¹	8.48x10 ⁻¹	b	b	c	9.20	9.20	871	1.05	915	125
837	Film	606	2.28x10 ⁻¹	6.46x10 ⁻¹	3.72x10 ⁻¹	6.59x10 ⁻¹	51.8	30.5	d	80.0	162	1240	1.25	1550	83.3
934	Chemical	1300	2.28x10 ⁻¹	6.46x10 ⁻¹	3.72x10 ⁻¹	6.59x10 ⁻¹	51.8	30.5	d	40.0	122	1180	1.0	1180	83.3
934	Chemical	606	1.31x10 ⁻¹	3.75x10 ⁻¹	1.94x10 ⁻¹	4.27x10 ⁻¹	29.8	16.7	d	46.0	62.5	622	1.25	777	45.0
1030	Chemical	230	7.07x10 ⁻²	2.17x10 ⁻¹	1.23x10 ⁻¹	2.07x10 ⁻¹	16.1	9.56	d	25.0	50.7	595	1.25	595	24.7
1125	Film	606	3.64x10 ⁻²	1.02x10 ⁻¹	5.96x10 ⁻²	1.19x10 ⁻¹	b	b	c	2.04	2.04	228	1.05	240	24.7
1275	Chemical	82	1.66x10 ⁻²	4.92x10 ⁻²	2.71x10 ⁻²	4.16x10 ⁻²	8.30	4.52	c	7.30	20.1	107	1.0	107	11.8
1420	Film	606	7.69x10 ⁻²	2.01x10 ⁻¹	9.71x10 ⁻²	2.43x10 ⁻¹	5.30	2.95	c	4.60	12.9	81	1.04	54	5.41
1520	Chemical	36	4.37x10 ⁻²	1.30x10 ⁻¹	6.93x10 ⁻²	1.43x10 ⁻¹	3.0	1.69	c	2.70	7.39	69	1.0	69	4.19
1620	Film	510	2.67x10 ⁻²	7.62x10 ⁻²	4.08x10 ⁻²	8.77x10 ⁻²	1.75	0.99	c	1.60	4.34	40	1.0	40	2.42
1720	Chemical	20	1.59x10 ⁻²	4.40x10 ⁻²	2.37x10 ⁻²	4.07x10 ⁻²	0.98	0.58	c	0.80	2.37	27	1.0	27	1.38
1815	Chemical	14	9.72x10 ⁻³	2.64x10 ⁻²	1.40x10 ⁻²	3.13x10 ⁻²	0.58	0.46	c	0.50	1.54	18	1.0	18	0.81
1915	Chemical	10	5.73x10 ⁻³	1.64x10 ⁻²	8.16x10 ⁻³	1.66x10 ⁻²	0.35	0.27	c	0.30	0.92	13	1.0	13	0.47
2015	Chemical	6.7	3.45x10 ⁻³	9.82x10 ⁻³	4.93x10 ⁻³	1.06x10 ⁻²	0.22	0.12	c	0.20	0.54	9.5	1.0	9.5	0.28
2115	Chemical	502	2.6	1.28x10 ⁻²	6.71x10 ⁻³	1.39x10 ⁻²	0.16	0.084	c	0.07	0.17	4.7	1.0	4.7	0.10
2210	Chemical	502	1.4	4.82x10 ⁻³	1.29x10 ⁻³	4.36x10 ⁻³	0.086	0.05	c	0.02	0.0527	2.5	1.0	2.5	0.037
2310	Chemical	502	0.81	1.84x10 ⁻³	4.99x10 ⁻⁴	1.09x10 ⁻³	0.032	0.005	c	0.01	0.014	1.4	1.0	1.4	0.01
2410	Chemical	502	0.54	1.09x10 ⁻³	3.12x10 ⁻⁴	6.90x10 ⁻⁴	0.013	0.001	c	0.01	0.014	0.83	1.0	0.83	0.01
2510	Chemical	502	0.36	2.70x10 ⁻⁴	7.55x10 ⁻⁵	1.04x10 ⁻⁴	0.003	0.001	c	0.01	0.014	0.54	1.0	0.54	0.01
3010	Chemical	502	0.36	2.70x10 ⁻⁴	7.55x10 ⁻⁵	1.04x10 ⁻⁴	0.003	0.001	c	0.01	0.014	0.36	1.0	0.36	0.01

*225°
Negligible.
Chemical Beer Mug with Lithium.
HES film badge in 0.551 cm thick pipe nipple.
HES film badge attached to stake.

(U) TABLE 3.108 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT 1A14ACX

Slant Azi- Range with	Type of Detector	Uncor- rected Gamma Dose	Au	Pu	Np	U	Au Correc- tion	Past Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose	Atten- uation Factor	Final Corrected Gamma Dose	Soil Contri- bution
yd		r	n/cm ²	n/cm ²	n/cm ²	n/cm ²		r	c	f	r	r	r	r	r
911	Chemical	4790	0.03x10 ⁻²	3.02x10 ⁻²	1.20x10 ⁻²	5.44x10 ⁻²	b	b	c	23.2	23.2	4730	1.05	4970	306
1010	Chemical	3000	4.4x10 ⁻¹	1.07x10 ⁻¹	7.20x10 ⁻¹	2.94x10 ⁻¹	b	b	c	12.8	12.8	2930	1.05	3100	140
1110	Chemical	1430	2.6x10 ⁻¹	9.70x10 ⁻¹	4.10x10 ⁻¹	1.63x10 ⁻¹	b	b	c	7.60	7.60	1420	1.04	1480	96.2
1210	Chemical	825	1.56x10 ⁻¹	5.44x10 ⁻¹	2.60x10 ⁻¹	1.08x10 ⁻¹	b	b	c	4.50	4.50	860	1.04	893	53.3
1310	Chemical	1100	1.56x10 ⁻¹	5.44x10 ⁻¹	2.60x10 ⁻¹	1.08x10 ⁻¹	b	b	c	4.50	4.50	1050	1.04	1120	53.3
1410	Chemical	750	1.56x10 ⁻¹	5.44x10 ⁻¹	2.60x10 ⁻¹	1.08x10 ⁻¹	b	b	c	4.50	4.50	1100	1.04	1210	53.3
1510	Chemical	505	6.27x10 ⁻²	2.01x10 ⁻¹	1.09x10 ⁻¹	6.16x10 ⁻²	b	b	c	2.60	2.60	747	1.04	777	31.2
1610	Chemical	325	3.11x10 ⁻²	1.02x10 ⁻¹	5.09x10 ⁻²	3.18x10 ⁻²	b	b	c	1.50	1.50	503	1.04	523	19.5
1705	Chemical	216	2.31x10 ⁻²	7.72x10 ⁻²	3.63x10 ⁻²	1.51x10 ⁻²	b	b	c	0.99	0.99	334	1.04	357	11.1
1805	Chemical	216	2.31x10 ⁻²	7.72x10 ⁻²	3.63x10 ⁻²	1.51x10 ⁻²	b	b	c	0.99	0.99	216	1.04	224	7.3

*225°
Negligible.
Chemical Beer Mug with Lithium.

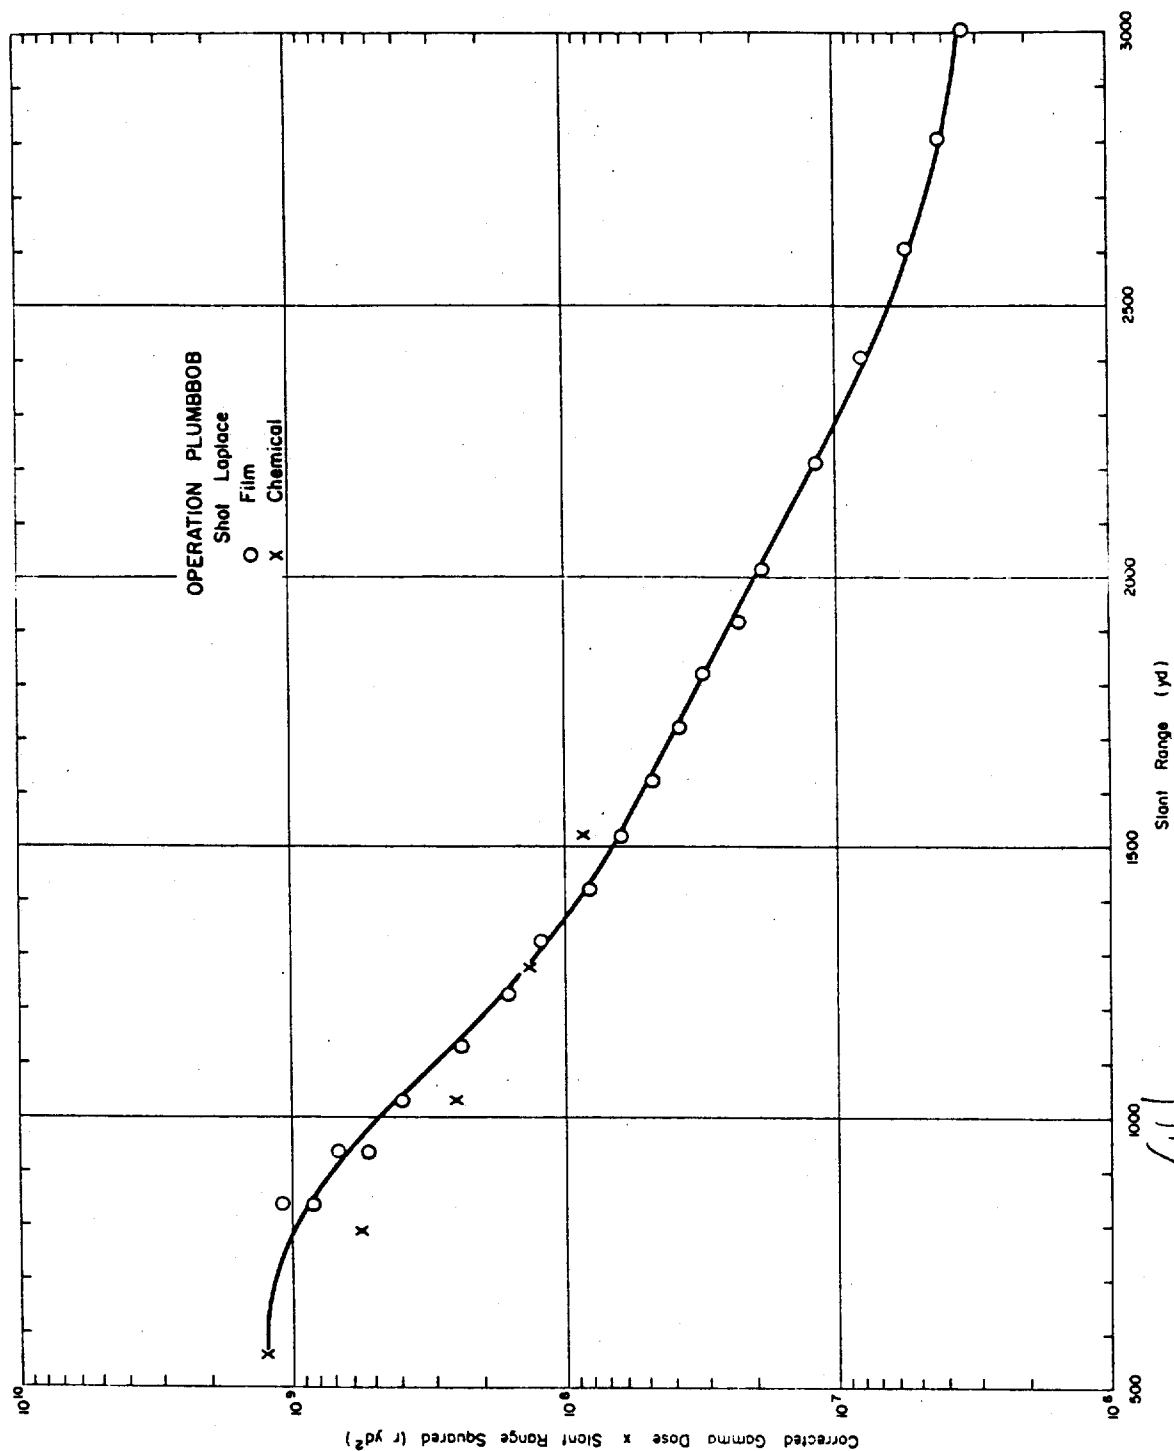


Figure 3.78 (S-RD) Operation Plumbbob - Shot Laplace - Corrected gamma dose times slant range squared versus slant range (U).

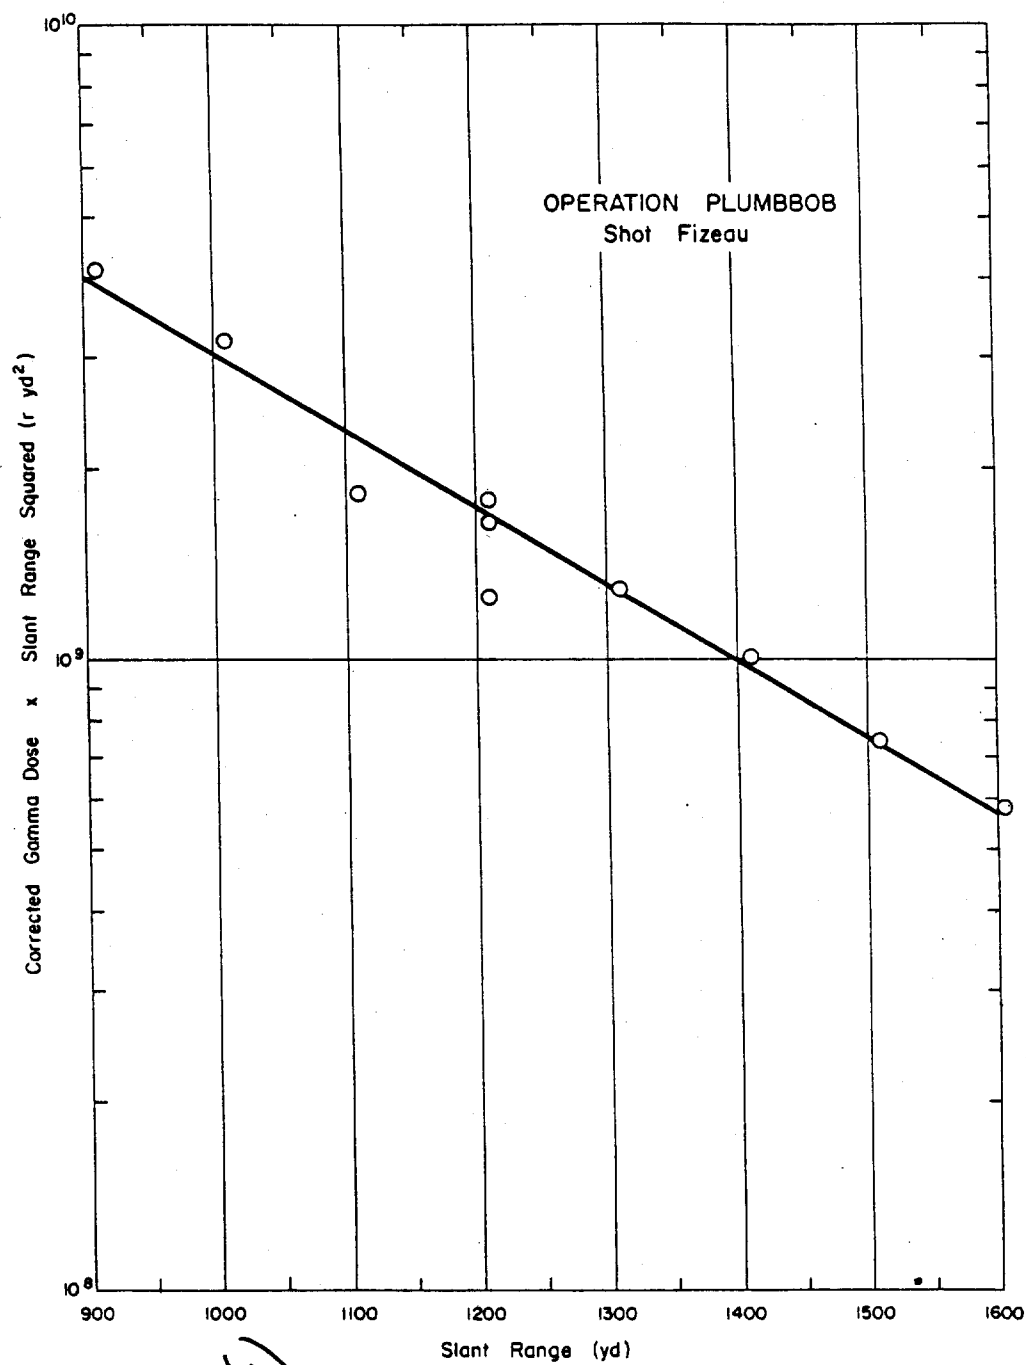


Figure 3.79 (S-PD) Operation Plumbbob - Shot Fizeau -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

(U)

(S-60) TABLE 3.109 INITIAL GAMMA DOSE DATA - OPERATION WJHNNH, SHOT WHITNEY

Slant Range	Asimuth	Type of Detector	Uncor-rected Gamma Dose	Neutron Flux	Type of Shield
yd			r	n/cm ²	
768	-	Film 1112	9,130	a	b
1,011	-	1112	2,160	a	b
1,260	-	1112	630	a	b
1,509	-	606	241	a	b
1,760	-	510	87	a	b

a. Neutron data not available.
 b. EDC film badge attached to stake.

(U)

(S-60) TABLE 3.110 INITIAL GAMMA DOSE DATA - OPERATION PLUMBBOB, SHOT CHARLESTON

Slant Range	Asimuth	Type of Detector	Uncor-rected Gamma Dose	Neutron Flux	Type of Shield
yd			r	n/cm ²	
2,102	120°	Chemical	39	a	b
2,201	120°	Chemical	28.5	a	b
2,300	120°	Chemical	41.5	a	b
2,400	120°	Chemical	13.5	a	b
2,500	120°	Chemical	< 10	a	b
2,112	120°	Chemical	58	a	b
2,201	120°	Chemical	35	a	b
2,300	120°	Chemical	39	a	b
2,400	120°	Chemical	19	a	b
2,500	120°	Chemical	< 10	a	b

a. No neutron data available.
 b. Beer Mug with lithium.

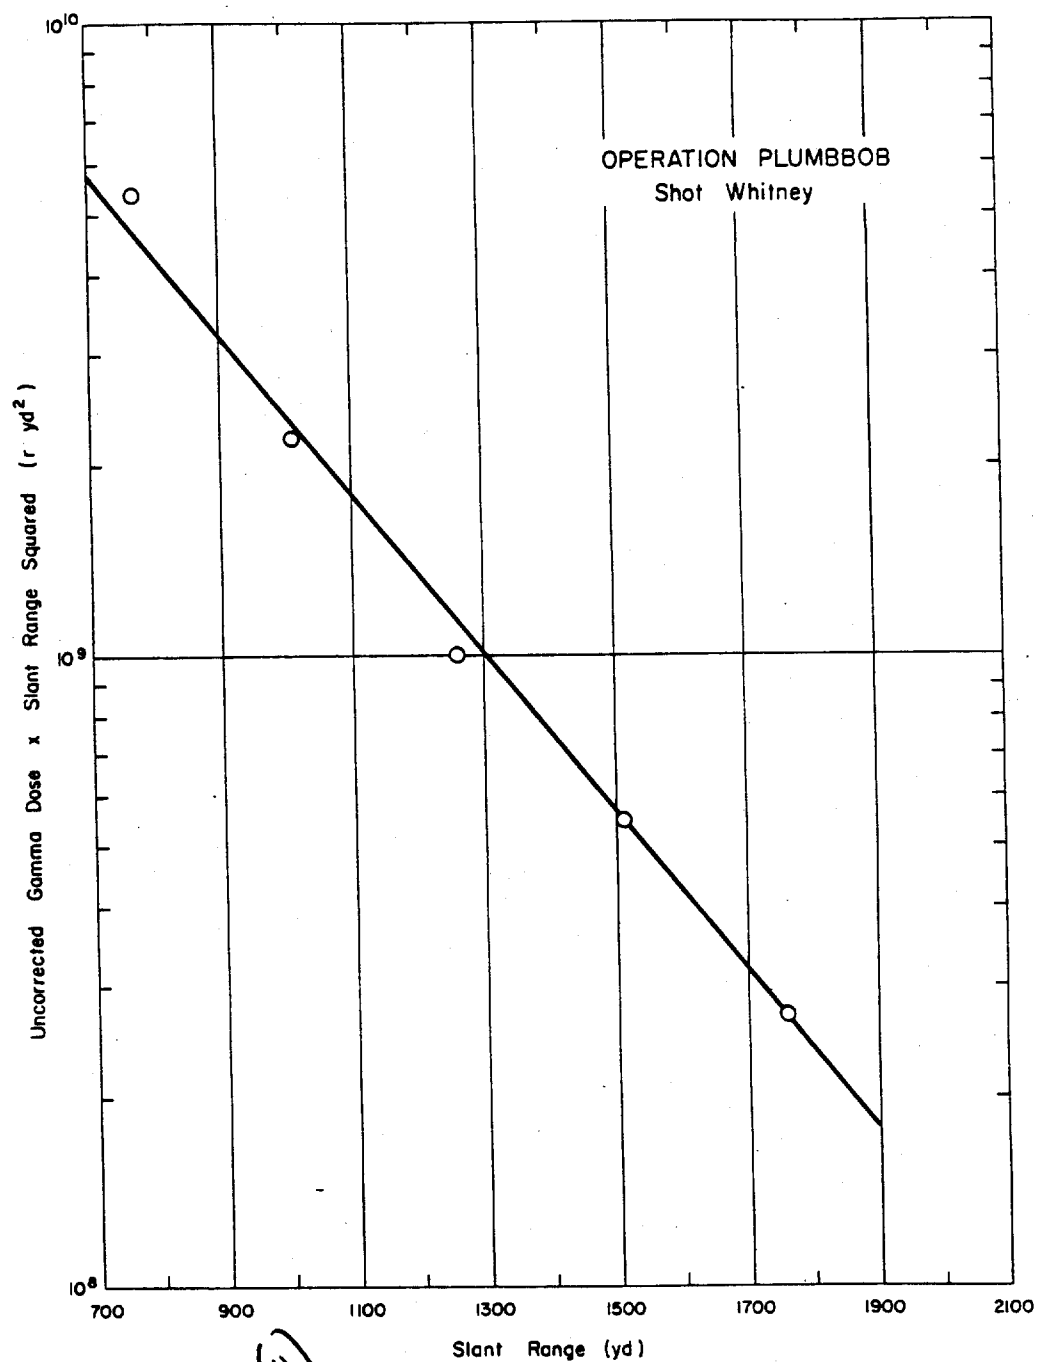


Figure 3.80 (S-PD) Operation Plumbbob - Shot Whitney - Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

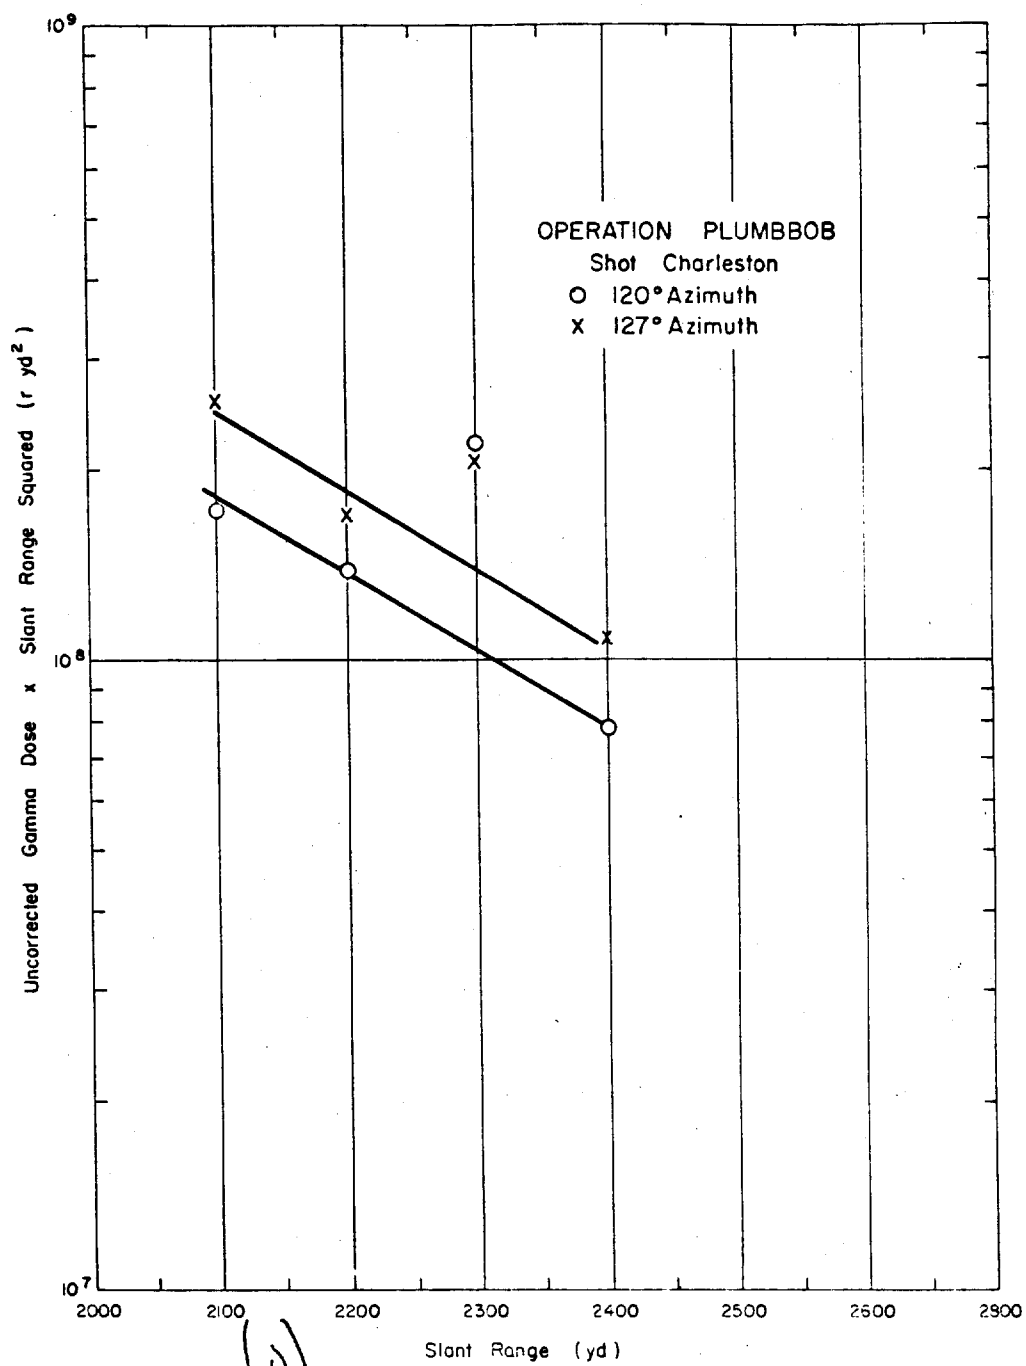


Figure 3.81 (S-80) Operation Plumbbob - Shot Charleston -
Uncorrected gamma-dose-times-slant-range-
versus slant-range (U).

(2)

(3-40) TABLE 3.111 SHOT INFORMATION - OPERATION HARDTACK

Shot Designation	Date and Time Fired	Location and Type	Yield	
			Total	kt
Fig	15 Aug 1958 0400:00 GMT	PPG-Site Yvonne-Surface		
Mora	29 Sept 1958 1405:00 GMT	MTS-Area 7 Balloon	2.0	
Lea	13 Oct 1958 1320:00 GMT	MTS-Area 7 Balloon	1.5	
Hamilton	15 Oct 1958 1600:00 GMT	MTS-P.P. Tower	1.17x10 ⁻³	
Socorro	22 Oct 1958 1330:00 GMT	MTS-Area 7 Balloon	6.2	
Humboldt	29 Oct 1958 1445:00 GMT	MTS-Area 3 Tower	7.8x10 ⁻³	

Delete Delete

(U) TABLE 3.112 METEOROLOGICAL DATA - OPERATION HARDTACK

Shot	Pressure	Temperature	Density	ρ/ρ_0	$(\rho_0/\rho)^2$
	mb	°K	$\text{g/cm}^3 \times 10^3$		
Fig	1007	303	1.17	0.90	1.23
Mora	874	284.8	1.04	0.80	1.56
Lea	874	286.4	1.04	0.80	1.56
Hamilton	831	288.7	1.08	0.83	1.45
Socorro	874	277.7	1.06	0.82	1.49
Humboldt	885	280.4	1.10	0.85	1.39

Pages 195 & 196 Deleted

(U) TABLE 3.114 INITIAL GAMMA DOSE DATA - OPERATION WAREHACK, SHOT 18A


Shot Azimuth	Range	Type of Detector	Neutron Flux				Gamma Dose				Soil Contribution			
			r	n/cm ²	u/cm ²	n/cm ²	r	n/cm ²	u/cm ²	n/cm ²	r	n/cm ²	u/cm ²	n/cm ²
791	3	Chemical	3,120	1.0x10 ¹²	3.9x10 ¹²	1.0x10 ¹²	3,120	1.0x10 ¹²	3.9x10 ¹²	1.0x10 ¹²	3,120	1.0x10 ¹²	3.9x10 ¹²	1.0x10 ¹²
791	3	Glass	3,120	1.0x10 ¹²	3.9x10 ¹²	1.0x10 ¹²	3,120	1.0x10 ¹²	3.9x10 ¹²	1.0x10 ¹²	3,120	1.0x10 ¹²	3.9x10 ¹²	1.0x10 ¹²
984	3	Chemical	1,460	4.1x10 ¹¹	1.5x10 ¹²	4.1x10 ¹¹	1,460	4.1x10 ¹¹	1.5x10 ¹²	4.1x10 ¹¹	1,460	4.1x10 ¹¹	1.5x10 ¹²	4.1x10 ¹¹
984	3	Glass	1,270	4.1x10 ¹¹	1.5x10 ¹²	4.1x10 ¹¹	1,270	4.1x10 ¹¹	1.5x10 ¹²	4.1x10 ¹¹	1,270	4.1x10 ¹¹	1.5x10 ¹²	4.1x10 ¹¹
1,200	3	Chemical	1,000	2.5x10 ¹¹	8.9x10 ¹¹	2.5x10 ¹¹	1,000	2.5x10 ¹¹	8.9x10 ¹¹	2.5x10 ¹¹	1,000	2.5x10 ¹¹	8.9x10 ¹¹	2.5x10 ¹¹
1,200	3	Glass	846	2.5x10 ¹¹	8.9x10 ¹¹	2.5x10 ¹¹	846	2.5x10 ¹¹	8.9x10 ¹¹	2.5x10 ¹¹	846	2.5x10 ¹¹	8.9x10 ¹¹	2.5x10 ¹¹
1,113	3	Chemical	622	1.6x10 ¹¹	5.8x10 ¹¹	1.6x10 ¹¹	622	1.6x10 ¹¹	5.8x10 ¹¹	1.6x10 ¹¹	622	1.6x10 ¹¹	5.8x10 ¹¹	1.6x10 ¹¹
1,113	3	Glass	676	1.6x10 ¹¹	5.8x10 ¹¹	1.6x10 ¹¹	676	1.6x10 ¹¹	5.8x10 ¹¹	1.6x10 ¹¹	676	1.6x10 ¹¹	5.8x10 ¹¹	1.6x10 ¹¹
1,209	3	Chemical	377	1.0x10 ¹¹	3.5x10 ¹¹	1.0x10 ¹¹	377	1.0x10 ¹¹	3.5x10 ¹¹	1.0x10 ¹¹	377	1.0x10 ¹¹	3.5x10 ¹¹	1.0x10 ¹¹
1,209	3	Glass	431	1.0x10 ¹¹	3.5x10 ¹¹	1.0x10 ¹¹	431	1.0x10 ¹¹	3.5x10 ¹¹	1.0x10 ¹¹	431	1.0x10 ¹¹	3.5x10 ¹¹	1.0x10 ¹¹
1,393	3	Chemical	121	3.6x10 ¹⁰	1.3x10 ¹¹	3.6x10 ¹⁰	121	3.6x10 ¹⁰	1.3x10 ¹¹	3.6x10 ¹⁰	121	3.6x10 ¹⁰	1.3x10 ¹¹	3.6x10 ¹⁰
1,393	3	Glass	151	3.6x10 ¹⁰	1.3x10 ¹¹	3.6x10 ¹⁰	151	3.6x10 ¹⁰	1.3x10 ¹¹	3.6x10 ¹⁰	151	3.6x10 ¹⁰	1.3x10 ¹¹	3.6x10 ¹⁰
1,581	3	Chemical	64	1.3x10 ¹⁰	5.8x10 ¹⁰	1.3x10 ¹⁰	64	1.3x10 ¹⁰	5.8x10 ¹⁰	1.3x10 ¹⁰	64	1.3x10 ¹⁰	5.8x10 ¹⁰	1.3x10 ¹⁰
1,581	3	Glass	94	1.3x10 ¹⁰	5.8x10 ¹⁰	1.3x10 ¹⁰	94	1.3x10 ¹⁰	5.8x10 ¹⁰	1.3x10 ¹⁰	94	1.3x10 ¹⁰	5.8x10 ¹⁰	1.3x10 ¹⁰

Unknown.
Unpredictable.
CORREL BEER MUG WITH LITHIUM.

(U) TABLE 3.115 INITIAL GAMMA DOSE DATA - OPERATION WAREHACK, SHOT 18A

Shot Azimuth	Range	Type of Detector	Neutron Flux				Gamma Dose				Soil Contribution			
			r	n/cm ²	u/cm ²	n/cm ²	r	n/cm ²	u/cm ²	n/cm ²	r	n/cm ²	u/cm ²	n/cm ²
791	3	Chemical	2,300	8.1x10 ¹¹	2.8x10 ¹²	8.1x10 ¹¹	2,300	8.1x10 ¹¹	2.8x10 ¹²	8.1x10 ¹¹	2,300	8.1x10 ¹¹	2.8x10 ¹²	8.1x10 ¹¹
1,090	3	Chemical	77	1.5x10 ¹⁰	7.7x10 ¹⁰	1.5x10 ¹⁰	77	1.5x10 ¹⁰	7.7x10 ¹⁰	1.5x10 ¹⁰	77	1.5x10 ¹⁰	7.7x10 ¹⁰	1.5x10 ¹⁰
1,113	3	Chemical	410	1.1x10 ¹¹	4.1x10 ¹¹	1.1x10 ¹¹	410	1.1x10 ¹¹	4.1x10 ¹¹	1.1x10 ¹¹	410	1.1x10 ¹¹	4.1x10 ¹¹	1.1x10 ¹¹
1,209	3	Chemical	277	7.7x10 ¹⁰	2.7x10 ¹¹	7.7x10 ¹⁰	277	7.7x10 ¹⁰	2.7x10 ¹¹	7.7x10 ¹⁰	277	7.7x10 ¹⁰	2.7x10 ¹¹	7.7x10 ¹⁰
1,581	3	Chemical	43	1.6x10 ¹⁰	1.6x10 ¹⁰	1.6x10 ¹⁰	43	1.6x10 ¹⁰	1.6x10 ¹⁰	1.6x10 ¹⁰	43	1.6x10 ¹⁰	1.6x10 ¹⁰	1.6x10 ¹⁰

Unknown.
Unpredictable.
CORREL BEER MUG WITH LITHIUM.

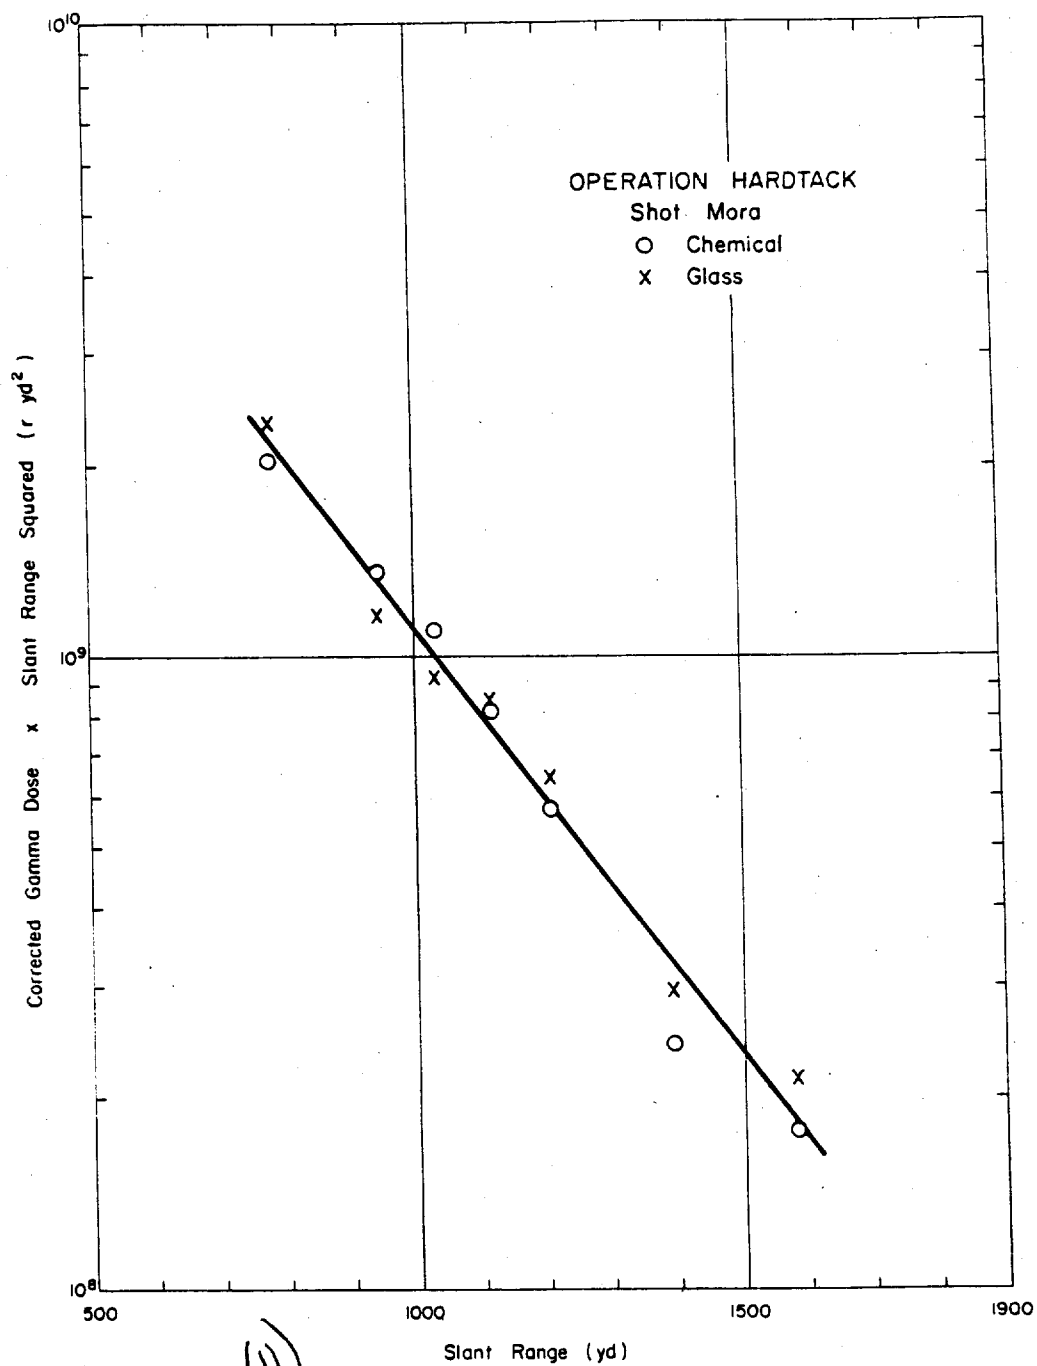

(U)
Figure 3.83 (S-RD) Operation Hardtack - Shot Mora - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

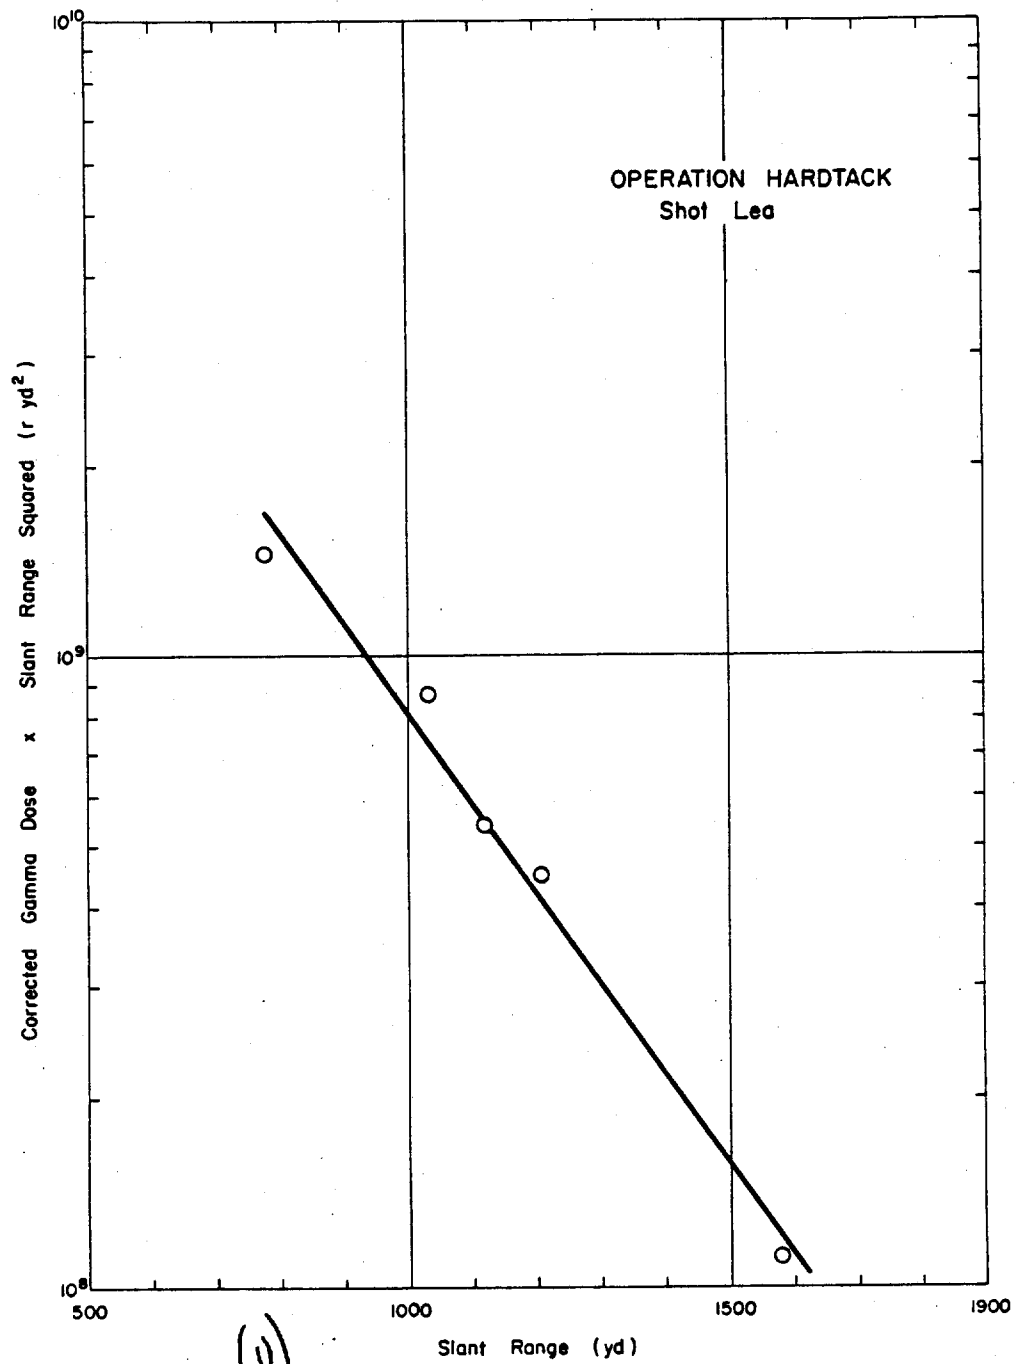


Figure 3.84 (U) Operation Hardtack - Shot Lea - Corrected gamma-dose-times-slant-range-squared versus slant-range (U).

TABLE 3.116 INITIAL GAMMA DOSE DATA - OPERATION HAWTACK, SHOT DASHLEY

Slant Azi- Range mth.	Type of Detector	Uncor- rected Gamma Dose			Neutron Flux			Au Thermal Correct- tion		Shield Type		Total Correct- tion		Cor- rected Gamma Dose		Final Corrected Gamma Dose		Soil Contri- bution	
		r	n/cm ²	n/cm ²	Pu	Hy	U	r	r	r	r	r	r	r	r	r	r	r	r
101.3	150°	60	1.72x10 ⁻¹	5.70x10 ⁻¹	3.50x10 ⁻¹	1.40x10 ⁻¹	1.40x10 ⁻¹	39.7	30.9	"	63.9	134.5	285	1.25	356	55.3	55.3	9.10	9.10
200	150°	60	3.13x10 ⁻¹	9.50x10 ⁻¹	5.75x10 ⁻¹	2.25x10 ⁻¹	2.25x10 ⁻¹	7.10	5.10	"	11.3	23.5	57	1.25	71	2.57	2.57	0.94	0.94
300	150°	60	9.44x10 ⁻²	2.72x10 ⁻¹	1.61x10 ⁻¹	6.67x10 ⁻²	6.67x10 ⁻²	2.05	1.09	"	3.43	7.47	27.0	1.25	33.6	11.9	11.9	0.44	0.44
400	150°	60	12.4	3.72x10 ⁻¹	2.30x10 ⁻¹	1.04x10 ⁻¹	1.04x10 ⁻¹	0.82	0.71	"	0.63	1.33	4.47	1.25	5.59	3.60	3.60	0.20	0.20
500	150°	60	5.50	1.72x10 ⁻¹	1.04x10 ⁻¹	4.72x10 ⁻²	4.72x10 ⁻²	0.37	0.33	"	0.31	0.57	3.13	1.15	3.60	1.97	1.97	0.097	0.097
600	150°	60	3.70	8.61x10 ⁻²	5.13x10 ⁻²	2.45x10 ⁻²	2.45x10 ⁻²	0.22	0.04	"	0.16	0.29	1.71	1.15	1.78	0.097	0.097	0.051	0.051
700	150°	60	2.00	4.35x10 ⁻²	2.97x10 ⁻²	1.26x10 ⁻²	1.26x10 ⁻²	0.11	0.02	"	0.06	0.15	1.55	1.15	1.78	0.051	0.051	0.051	0.051
800	150°	60	1.70	2.35x10 ⁻²	1.53x10 ⁻²	6.84x10 ⁻³	6.84x10 ⁻³	0.06	0.01	"	0.06	0.15	1.55	1.15	1.78	0.051	0.051	0.051	0.051
30.2	330°	60	3.00x10 ⁻¹	9.50x10 ⁻¹	5.75x10 ⁻¹	2.25x10 ⁻¹	2.25x10 ⁻¹	363	210	"	576	1149	1300	1.25	1820	240	240	9.10	9.10
52.8	330°	60	1.90x10 ⁻¹	5.70x10 ⁻¹	3.50x10 ⁻¹	1.40x10 ⁻¹	1.40x10 ⁻¹	119	128	"	189	402	458	1.25	623	99.1	99.1	53.1	53.1
76.9	330°	60	7.00	2.14x10 ⁻¹	1.32x10 ⁻¹	5.84x10 ⁻²	5.84x10 ⁻²	58.4	51.0	"	92.6	206.0	239	1.25	374	30.0	30.0	17.3	17.3
101.3	330°	60	4.35	1.67x10 ⁻¹	1.04x10 ⁻¹	4.72x10 ⁻²	4.72x10 ⁻²	39.7	33.4	"	63.0	136.1	299	1.25	231	13.0	13.0	13.0	13.0
126	330°	60	2.55	8.96x10 ⁻²	5.84x10 ⁻²	2.84x10 ⁻²	2.84x10 ⁻²	20.4	17.0	"	32.3	69.7	185	1.25	141	17.3	17.3	17.3	17.3
150	330°	60	1.59	5.97x10 ⁻²	3.84x10 ⁻²	1.84x10 ⁻²	1.84x10 ⁻²	13.5	11.5	"	21.4	46.4	113	1.25	115	13.0	13.0	13.0	13.0
175	330°	60	1.21	3.50x10 ⁻²	2.30x10 ⁻²	1.04x10 ⁻²	1.04x10 ⁻²	8.64	6.40	"	13.8	28.84	92.2	1.25	115	13.0	13.0	13.0	13.0
100	240°	60	3.20	1.31x10 ⁻¹	8.10x10 ⁻²	3.72x10 ⁻²	3.72x10 ⁻²	29.8	10.3	"	46.1	86.2	234	1.25	293	28.1	28.1	28.1	28.1
200	240°	60	70	2.37x10 ⁻¹	1.40x10 ⁻¹	6.40x10 ⁻²	6.40x10 ⁻²	5.39	2.35	"	8.36	16.1	54	1.25	68	5.66	5.66	5.66	5.66
300	240°	60	26	7.23x10 ⁻²	4.60x10 ⁻²	2.17x10 ⁻²	2.17x10 ⁻²	1.64	1.06	"	2.55	5.25	21	1.25	26	2.04	2.04	2.04	2.04
400	240°	60	10.3	3.07x10 ⁻²	1.93x10 ⁻²	9.17x10 ⁻³	9.17x10 ⁻³	0.67	0.75	"	1.08	2.50	7.80	1.25	9.75	1.13	1.13	1.13	1.13
500	240°	60	5.4	1.41x10 ⁻²	8.96x10 ⁻³	4.35x10 ⁻³	4.35x10 ⁻³	0.35	0.08	"	0.50	0.93	4.5	1.25	5.6	0.43	0.43	0.43	0.43
600	240°	60	3.0	6.20x10 ⁻³	3.93x10 ⁻³	1.84x10 ⁻³	1.84x10 ⁻³	0.16	0.06	"	0.22	0.44	2.6	1.15	3.0	0.29	0.29	0.29	0.29

*0.551 cm thick pipe nipple.

TABLE 3.117 INITIAL GAMMA DOSE DATA - OPERATION HAWTACK, SHOT SUCORRO

Slant Azi- Range mth.	Type of Detector	Uncor- rected Gamma Dose			Neutron Flux			Au Thermal Correct- tion		Shield Type		Total Correct- tion		Cor- rected Gamma Dose		Final Corrected Gamma Dose		Soil Contri- bution	
		r	n/cm ²	n/cm ²	Pu	Hy	U	r	r	r	r	r	r	r	r	r	r	r	r
701	60°	60	1.72x10 ⁻¹	5.70x10 ⁻¹	3.50x10 ⁻¹	1.40x10 ⁻¹	1.40x10 ⁻¹	39.7	30.9	"	63.9	134.5	285	1.25	356	55.3	55.3	9.10	9.10
900	60°	60	3.13x10 ⁻¹	9.50x10 ⁻¹	5.75x10 ⁻¹	2.25x10 ⁻¹	2.25x10 ⁻¹	7.10	5.10	"	11.3	23.5	57	1.25	71	2.57	2.57	0.94	0.94
1100	60°	60	9.44x10 ⁻²	2.72x10 ⁻¹	1.61x10 ⁻¹	6.67x10 ⁻²	6.67x10 ⁻²	2.05	1.09	"	3.43	7.47	27.0	1.25	33.6	11.9	11.9	0.44	0.44
1300	60°	60	12.4	3.72x10 ⁻¹	2.30x10 ⁻¹	1.04x10 ⁻¹	1.04x10 ⁻¹	0.82	0.71	"	0.63	1.33	4.47	1.25	5.59	3.60	3.60	0.20	0.20
1500	60°	60	5.50	1.72x10 ⁻¹	1.04x10 ⁻¹	4.72x10 ⁻²	4.72x10 ⁻²	0.37	0.33	"	0.31	0.57	3.13	1.15	3.60	1.97	1.97	0.097	0.097
1700	60°	60	3.70	8.61x10 ⁻²	5.13x10 ⁻²	2.45x10 ⁻²	2.45x10 ⁻²	0.22	0.04	"	0.16	0.29	1.71	1.15	1.78	0.097	0.097	0.051	0.051
1900	60°	60	2.00	4.35x10 ⁻²	2.97x10 ⁻²	1.26x10 ⁻²	1.26x10 ⁻²	0.11	0.02	"	0.06	0.15	1.55	1.15	1.78	0.051	0.051	0.051	0.051
2100	60°	60	1.70	2.35x10 ⁻²	1.53x10 ⁻²	6.84x10 ⁻³	6.84x10 ⁻³	0.06	0.01	"	0.06	0.15	1.55	1.15	1.78	0.051	0.051	0.051	0.051

*0.551 cm thick pipe nipple.

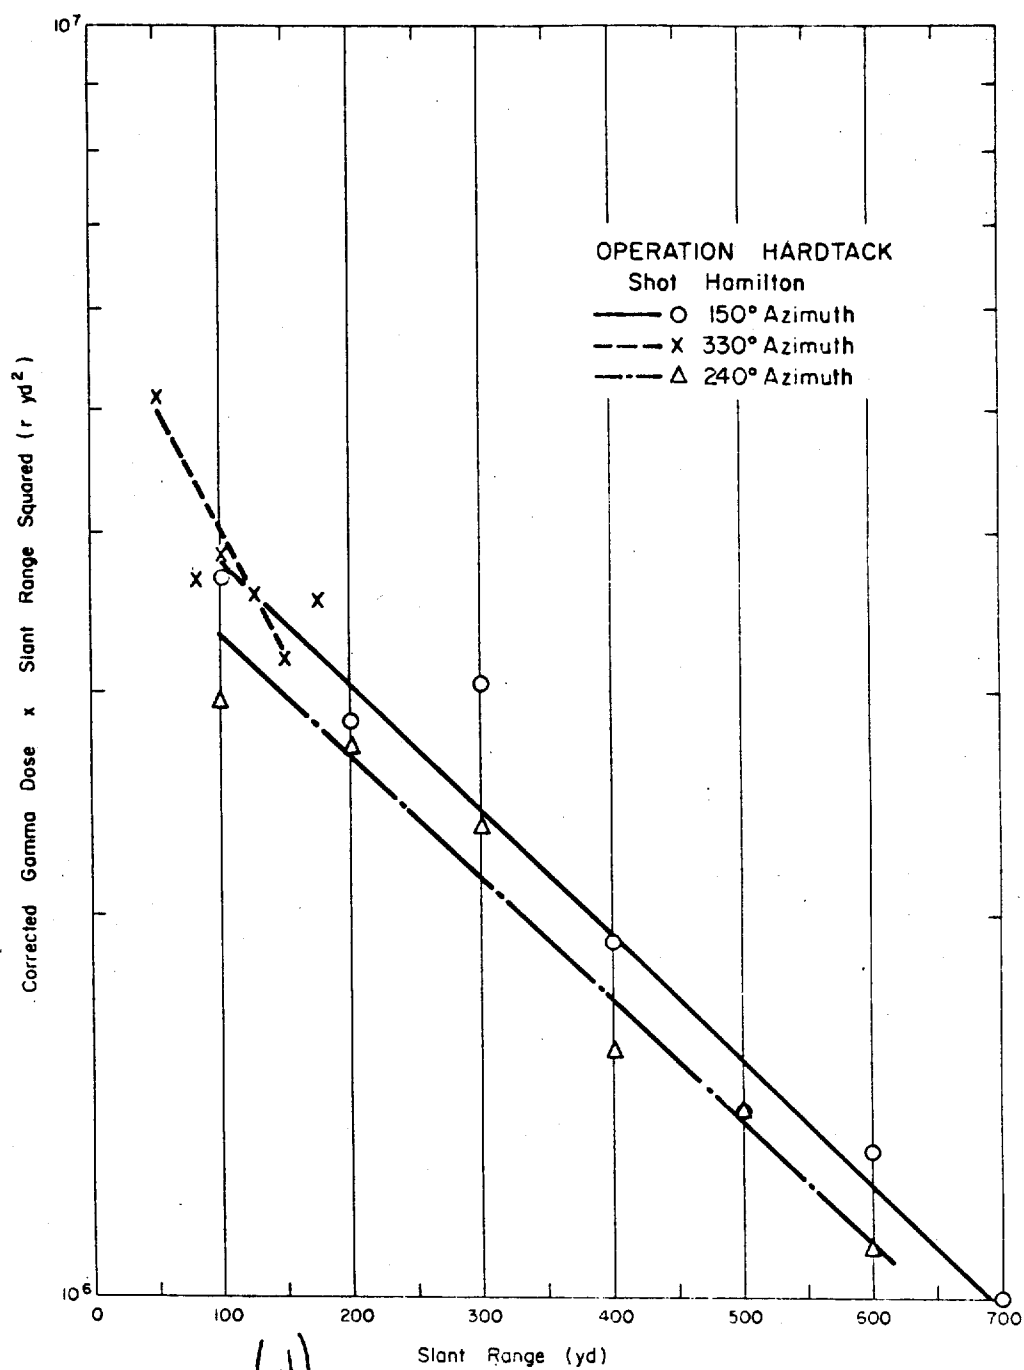


Figure 3.85 (U) Operation Hardtack - Shot Hamilton -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

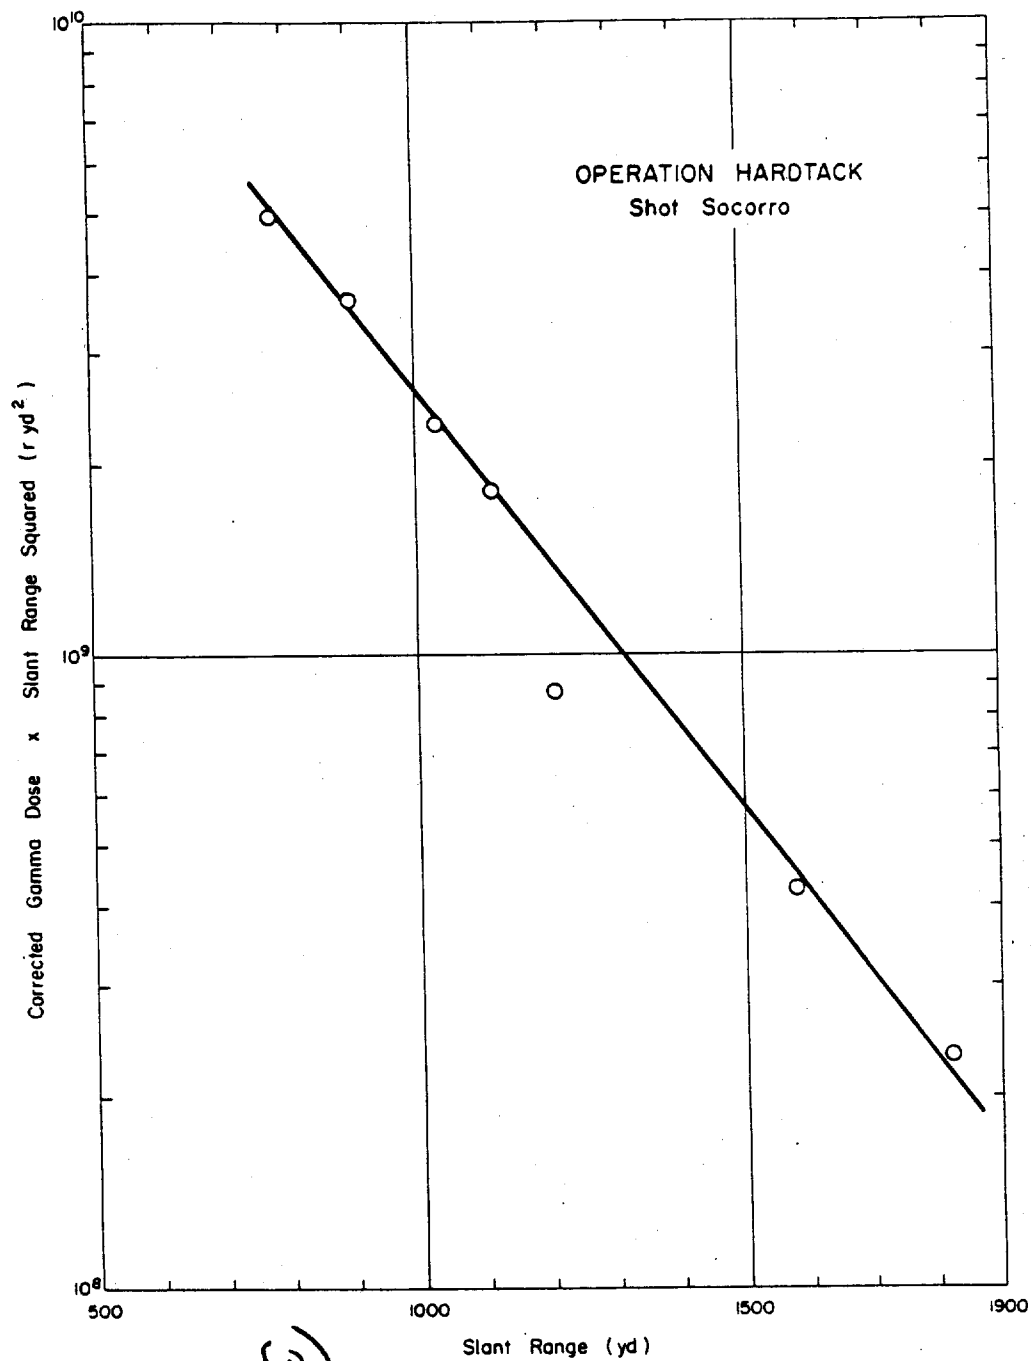


Figure 3.86 (S-10) Operation Hardtack - Shot Socorro -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

61

(3-80) TABLE 3.11R INITIAL CANSA DOSE DATA - OPERATION HANUTACK, SHOT HUMBOLDT

Slant Azi- Range multi	Type of Detector	Uncor- rected Gamma Dose	Neutron Flux				Au Thermal Correc- tion	Fast Correc- tion	Shield Type	Shield Correc- tion	Total Correc- tion	Cor- rected Gamma Dose		Atten- tion Factor		Film Corrected Gamma Dose		Soil Contribu- tion	
			Au	Pu	Hp	U						r	r	r	r	r	r		
			n/cm ²	n/cm ²	n/cm ²	n/cm ²													
yd		r																	
26.4	a	Film	54.4	29,000	1.71x10 ³	3.60x10 ³	2.4x10 ³	5.77x10 ³	60.0	b	60.0	19,430	9600	1.25	12,000	5080			
50.7	a		54.3	8,500	4.16x10 ²	1.13x10 ³	6.2x10 ²	2.77x10 ³	190	b	190	5,273	2600	1.25	3,300	1240			
100	a		54.3	3,000	1.12x10 ²	2.77x10 ²	1.2x10 ²	6.4x10 ²	404	b	404	1,493	1500	1.25	1,000	286			
200	a		54.3	600	2.27x10 ¹	6.17x10 ¹	2.5x10 ¹	1.37x10 ²	962	b	962	162	488	1.25	544	57.9			
300	a		54.3	230	7.4x10 ⁰	1.99x10 ¹	1.1x10 ¹	3.7x10 ¹	31.8	b	31.8	81.2	177	1.25	221	18.3			
400	a		54.3	61	2.22x10 ⁰	5.72x10 ⁰	3.5x10 ⁰	1.21x10 ¹	9.70	c	9.70	26.7	52.5	1.0	53	5.29			
600	a		54.3	15.2	8.33x10 ⁻¹	2.12x10 ⁰	1.2x10 ⁰	4.8x10 ⁰	3.00	c	3.00	4	3.34	1.0	11.9	1.96			
700	a		54.3	8.6	4.69x10 ⁻¹	1.18x10 ⁰	6.7x10 ⁻¹	2.4x10 ⁰	1.51	c	1.51	4	1.82	1.0	6.8	1.11			
800	a		54.3	502	4.7	2.70x10 ⁰	6.72x10 ⁰	3.7x10 ⁰	0.821	c	0.821	4	0.79	3.9	3.9	0.61			

a. 10⁶
b. 10⁵ cm thick, i.e. triple.
c. Bare or gold post.
d. Unknown.

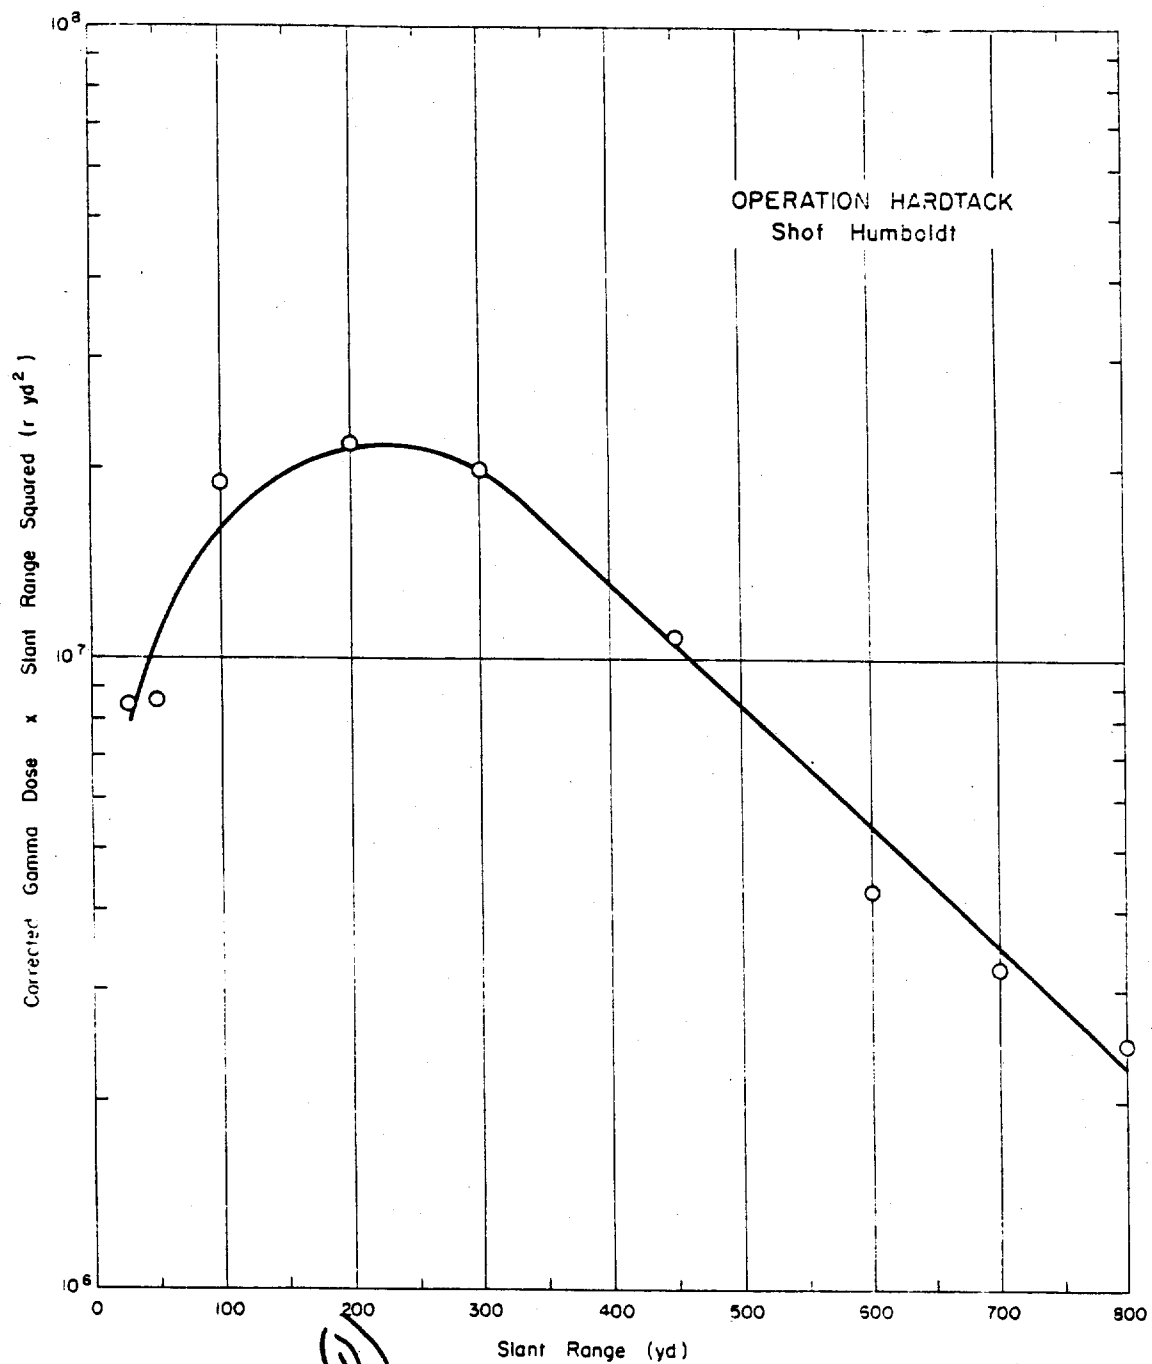


Figure 3.87 (S-30) Operation Hardtack - Shot Humboldt -
Corrected gamma-dose-times-slant-range-
squared versus slant-range (U).

(U) TABLE 3.119 SHOT INFORMATION - OPERATION SUN BEAM

Shot Designation	Date and Time Fired	Location and Type	Height of Burst	Yield Total
Little Feller II	7 July 1962 1900:00 GMT	Area 1A-Surface	3	0.5
Johnie Boy	11 July 1962 1645:00 GMT	Area 1A-Underground	~100'	
Small Boy	14 July 1962 1830:00 GMT	F. F. - Surface	10	
Little Feller I	17 July 1962 1700:01 GMT	Area 1B-Surface	~3	

(U) TABLE 3.120 METEOROLOGICAL DATA - OPERATION SUN BEAM

Shot	Pressure	Temperature	Density	ρ/ρ_0	$(\rho_0/\rho)^3$
	mb	$^{\circ}\text{K}$	$\text{g}/\text{cm}^3 \times 10^3$		
Little Feller II	59.5	305.5	0.96	0.74	1.83
Johnie Boy	59.5	297.3	1.00	0.77	1.69
Small Boy	59.4	306.7	1.05	0.73	1.60
Little Feller	59.4	302.7	0.97	0.75	1.70

Pages 206 thru 208
Deleted.

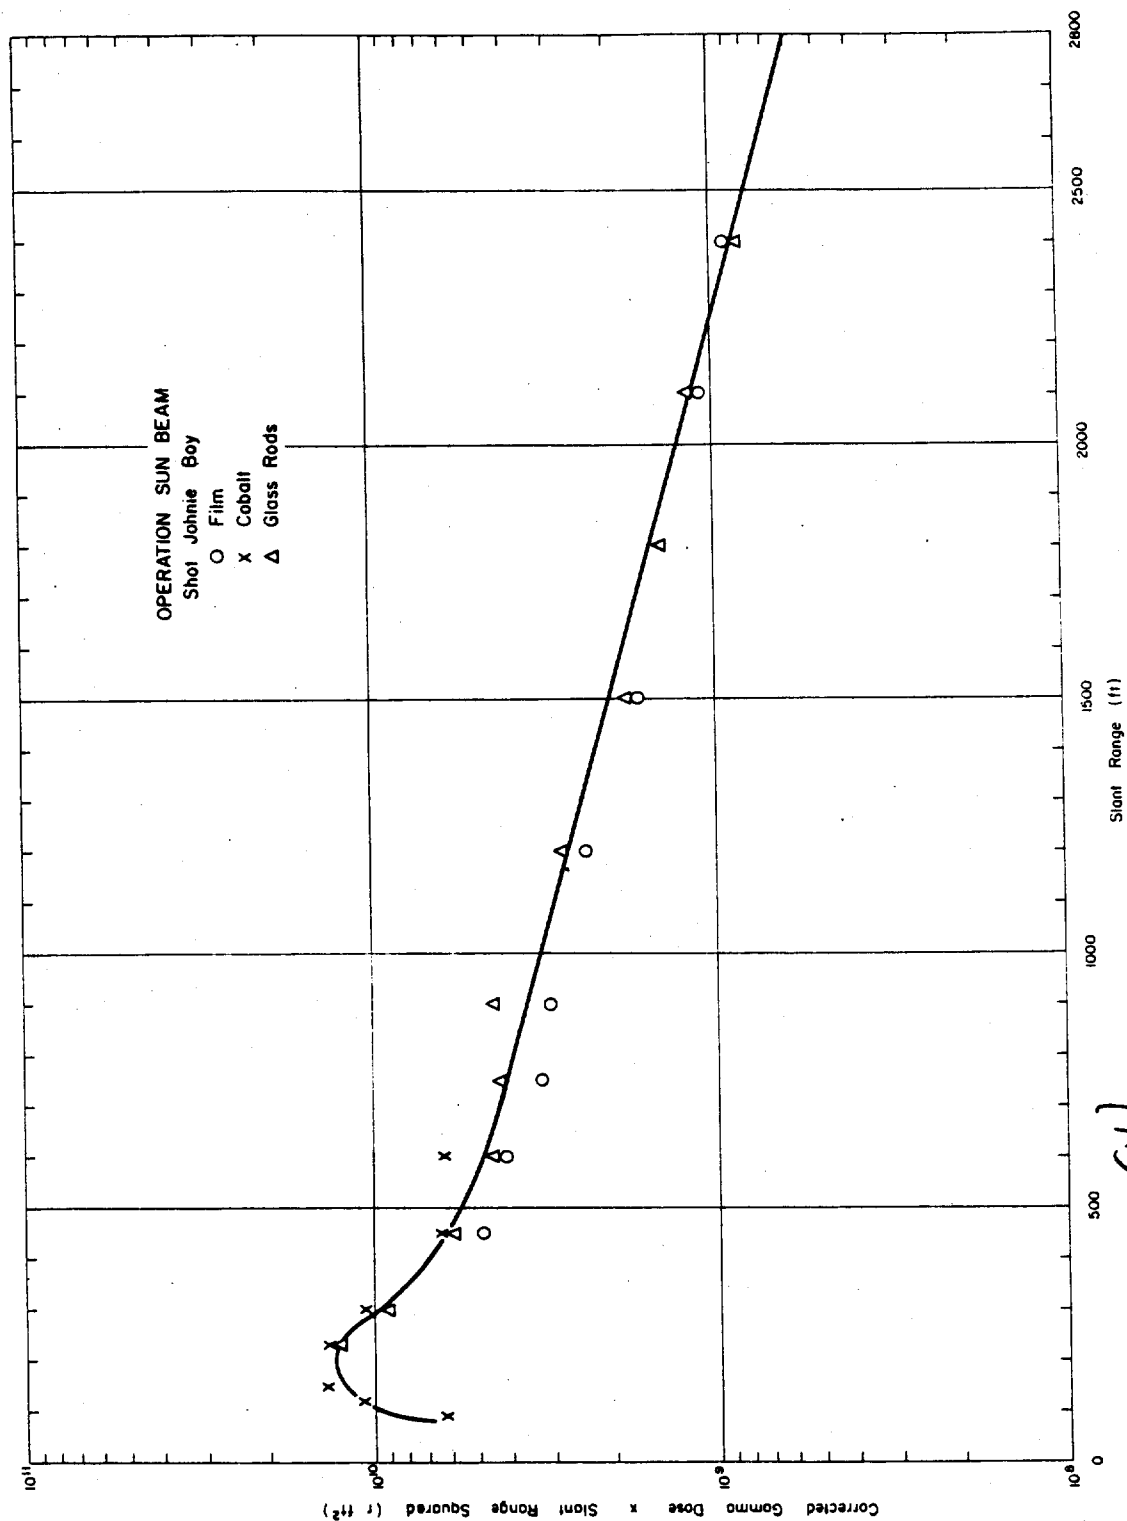


Figure 3.90 (S-RD) Operation Sun Beam - Shot Johnnie Boy - Corrected gamma-dose times-slant-range-squared versus slant range (U).

(1)

TABLE 3.12 INITIAL GAMMA DOSE DATA - OPERATION 300 BEAM, SHOT 30116 ROY

Range	A-Z	Type of Detector	Corrected Gamma Dose	Neutron Flux				Final Thermal Correction	Shield Type	Shield Thickness	Total Correction	Corrected Gamma Dose	Attenuation Factor	Final Corrected Gamma Dose	Soil Contribution
				R	n/cm ²	Au	Pu								
100	a	Count	700,000	1.7x10 ¹²	2.20x10 ¹²	9.09x10 ¹²	4.72x10 ¹²	d	b	71.2x2	71.740	628,000	1.25	75,000	c
120	a	Count	600,000	1.5x10 ¹²	1.65x10 ¹²	8.20x10 ¹²	3.07x10 ¹²	d	b	55.3x2	55.300	570,000	1.25	749,000	c
150	a	Count	500,000	1.25x10 ¹²	1.27x10 ¹²	4.91x10 ¹²	2.20x10 ¹²	d	b	25.1x2	25.100	493,000	1.25	616,000	c
225	a	Glass	212,000	3.6x10 ¹²	9.48x10 ¹²	3.21x10 ¹²	1.21x10 ¹²	d	b	12.7x2	12.700	217,000	1.25	269,000	c
275	a	Count	230,000	3.6x10 ¹²	9.48x10 ¹²	3.21x10 ¹²	1.21x10 ¹²	d	b	12.7x2	12.700	217,000	1.25	271,000	c
300	a	Glass	93,000	3.3x10 ¹²	4.39x10 ¹²	1.57x10 ¹²	6.43x10 ¹¹	d	b	73.2	73.200	95,000	1.25	120,000	c
300	a	Count	108,000	3.3x10 ¹²	4.39x10 ¹²	1.57x10 ¹²	6.43x10 ¹¹	d	b	73.2	73.200	108,000	1.25	120,000	c
450	a	Film 649	26,000	1.6x10 ¹²	1.96x10 ¹²	8.63x10 ¹¹	3.09x10 ¹¹	d	b	1.030	1.030	26,000	1.25	24,000	c
450	a	Glass	29,000	1.6x10 ¹²	1.96x10 ¹²	8.63x10 ¹¹	3.09x10 ¹¹	d	b	1.030	1.030	29,000	1.25	24,000	c
500	a	Film 649	31,000	1.6x10 ¹²	1.96x10 ¹²	8.63x10 ¹¹	3.09x10 ¹¹	d	b	1.030	1.030	31,000	1.25	24,000	c
500	a	Glass	31,000	1.6x10 ¹²	1.96x10 ¹²	8.63x10 ¹¹	3.09x10 ¹¹	d	b	1.030	1.030	31,000	1.25	24,000	c
600	a	Count	12,000	5.2x10 ¹²	1.12x10 ¹²	3.03x10 ¹¹	1.41x10 ¹¹	d	b	1.920	1.920	12,000	1.25	17,600	c
600	a	Glass	12,000	5.2x10 ¹²	1.12x10 ¹²	3.03x10 ¹¹	1.41x10 ¹¹	d	b	1.920	1.920	12,000	1.25	17,600	c
750	a	Film 649	6,000	2.4x10 ¹²	6.48x10 ¹¹	2.40x10 ¹¹	9.70x10 ¹⁰	d	b	1.022	1.022	6,000	1.25	7,710	c
750	a	Glass	7,200	2.4x10 ¹²	6.48x10 ¹¹	2.40x10 ¹¹	9.70x10 ¹⁰	d	b	1.022	1.022	7,200	1.25	7,710	c
800	a	Film 649	4,800	1.0x10 ¹²	5.17x10 ¹¹	1.20x10 ¹¹	5.28x10 ¹⁰	d	b	331	331.6	4,800	1.25	5,580	c
800	a	Glass	4,800	1.0x10 ¹²	5.17x10 ¹¹	1.20x10 ¹¹	5.28x10 ¹⁰	d	b	331	331.6	4,800	1.25	5,580	c
1,200	a	Film 1290	1,400	1.9x10 ¹²	1.79x10 ¹¹	5.12x10 ¹⁰	2.90x10 ¹⁰	d	b	70.2	70.2	1,400	1.25	1,650	c
1,200	a	Glass	1,400	1.9x10 ¹²	1.79x10 ¹¹	5.12x10 ¹⁰	2.90x10 ¹⁰	d	b	70.2	70.2	1,400	1.25	1,650	c
1,500	a	Film 1290	650	0.16x10 ¹²	1.11x10 ¹¹	4.20x10 ¹⁰	7.45x10 ⁹	d	b	35.2	35.2	650	1.25	764	c
1,500	a	Glass	650	0.16x10 ¹²	1.11x10 ¹¹	4.20x10 ¹⁰	7.45x10 ⁹	d	b	35.2	35.2	650	1.25	764	c
2,100	a	Film 1290	220	8.6x10 ¹¹	2.27x10 ¹⁰	1.20x10 ¹⁰	2.73x10 ⁹	d	b	3.45	3.45	220	1.15	273	c
2,100	a	Glass	220	8.6x10 ¹¹	2.27x10 ¹⁰	1.20x10 ¹⁰	2.73x10 ⁹	d	b	3.45	3.45	220	1.15	273	c
2,400	a	Film 1290	140	4.4x10 ¹¹	1.16x10 ¹⁰	8.65x10 ⁹	2.42x10 ⁹	d	b	0.62	0.62	140	1.15	153	c
2,400	a	Glass	140	4.4x10 ¹¹	1.16x10 ¹⁰	8.65x10 ⁹	2.42x10 ⁹	d	b	0.62	0.62	140	1.15	153	c
3,000	a	Film 1290	56	1.1x10 ¹²	3.20x10 ⁹	2.73x10 ⁹	1.94x10 ⁹	d	b	0.17	0.17	56	1.15	63.7	c
3,000	a	Glass	45	1.1x10 ¹²	3.20x10 ⁹	2.73x10 ⁹	1.94x10 ⁹	d	b	0.17	0.17	45	1.15	63.7	c

W
1.50 cm thick film
not calculated,
negligible.

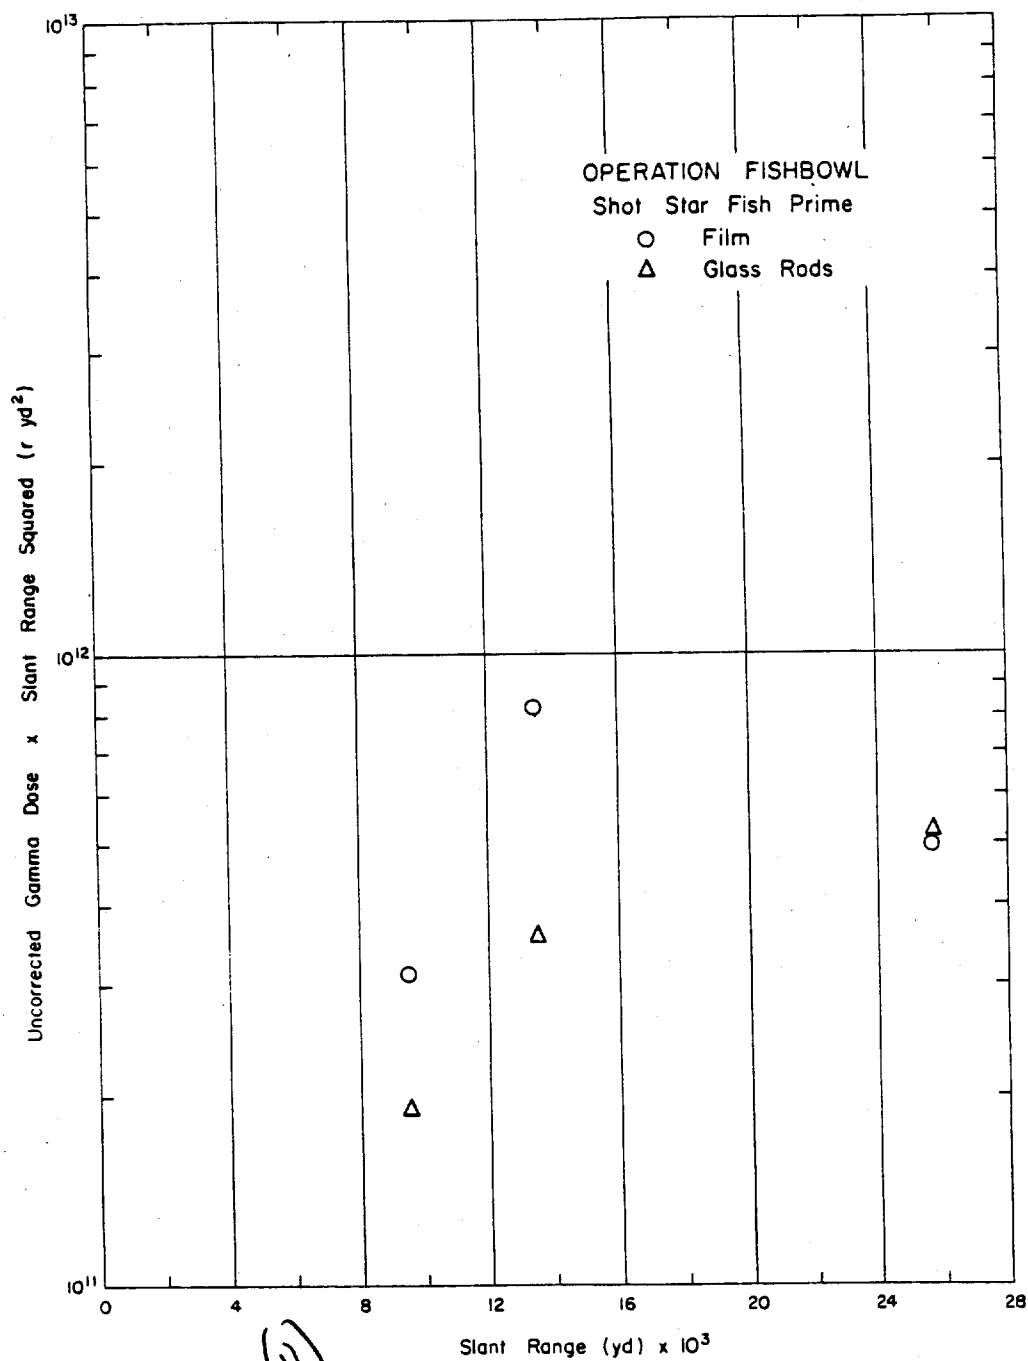


Figure 3.94 (S RD) Operation Fish Bowl - Shot Star Fish Prime
 Uncorrected gamma-dose-times-slant-range-squared versus slant-range (U).

APPENDIX

(U) The following example of the calculations that are necessary to correct the gamma dose data, is taken from the Shot Hood (Operation Plumbbob) data at 1119 yards slant range.

(S-RD) 1. To obtain the gold-neutron correction the thermal-neutron sensitivity of the 548 film (Table 2.3) is divided into the gold-neutron flux:

$$\frac{3.59 \times 10^{12} \text{ n/cm}^2}{8.8 \times 10^9 (\text{n/cm}^2)/r} = 407.6r = 408r$$

(S-RD) 2. To obtain the fast-neutron correction, the fast-neutron sensitivity of the 548 film (Table 2.3) at 1 MeV is divided into the total fast-neutron flux as represented by the Pu neutron flux:

$$\frac{1.04 \times 10^{13} \text{ n/cm}^2}{2.9 \times 10^9 (\text{n/cm}^2)/r} = 3586r = 3590r$$

(U) Since the fast-neutron sensitivity for the 548 film was obtained from a fission-neutron spectrum of average energy of 1 MeV in order to correct the film for fast-neutron effects, the average neutron energy of the particular shot must be assumed to be close to 1 MeV. For those films which have neutron sensitivities reported for a number of fast-neutron energies, the neutron sensitivity at 1 MeV is divided into the Pu-U flux, the neutron sensitivity at 2 MeV is divided the neutron sensitivity at 4 MeV is divided and these results are summed to obtain the total fast-neutron correction.

(S-RD) 3. To obtain the shield (Emmett) correction, the gamma dose value for a thermal flux of $1 \times 10^{12} \text{ n/cm}^2$ in Table 2.4 is multiplied by the gold-neutron flux divided by $1 \times 10^{12} \text{ n/cm}^2$; the gamma dose value for the 0.63 to 1.5 MeV interval is multiplied by the Np-U flux divided by $1 \times 10^{12} \text{ n/cm}^2$; the gamma dose value for the 1.5 to 3.0 MeV interval is multiplied the gamma dose value for over

(S-~~RD~~) 4. The gold, fast, and shield corrections are added and this value is subtracted from the uncorrected gamma dose to give a corrected gamma dose:

$$17,500r - (408 + 3590 + 1230) = 12,272r = 12,300r$$

(S-~~RD~~) 5. To correct for the gamma attenuation of the shield, gamma attenuation factors for each shield type were calculated for gamma energies of 1, 3, and 5 MeV using $\frac{1}{e^{-\mu x}}$ to calculate the attenuation factor. The

appropriate attenuation factor for the slant range and shot yield was multiplied by the corrected gamma dose to obtain the final corrected gamma dose:

$$12,300r \times 1.14 = 14,022r = 14,000r.$$

(S-~~RD~~) 6. To save time, "magic numbers" which are the soil gamma dose for 1×10^{12} thermal neutrons per square centimeter and for 1×10^{12} fast neutrons per square centimeter were calculated for Nevada-type soil, coral, and water using the methods outlined in Reference 5. To calculate

the soil contribution, the thermal "magic number" is multiplied by the thermal-neutron flux divided by 1×10^{12} n/cm² and added to the fast-neutron "magic number" multiplied by the fast-neutron flux (Pu) divided by 1×10^{12} n/cm². This result is multiplied by k using the formula:

$$1-k = \frac{\sqrt{R}-1}{\sqrt{R} + \sqrt{3} \cos \theta}$$

where θ = angle between normal to surface of ground and path of neutron beam from point of detonation

$$R = \frac{\sigma_s}{\sigma_a}$$

where

σ_s = microscopic scattering cross section of soil

σ_a = microscopic absorption cross section of soil

and then multiplied by the build-up factor for soil.

The constants for Nevada-type soil are:

Thermal "Magic Number" = 523r

Fast "Magic Number" = 351r

$\sqrt{R}$ = 8.17

Build-up factor = 1.3

$$\left(523r \times \frac{3.59 \times 10^{12} \text{ n/cm}^2}{1 \times 10^{12} \text{ n/cm}^2} \right) + \left(351r \times \frac{1.04 \times 10^{13} \text{ n/cm}^2}{1 \times 10^{12} \text{ n/cm}^2} \right)$$

$$1878r + 3754r = 5632r$$

$$\cos \theta = \frac{500 \text{ yds}}{1119 \text{ yds}} = 0.447$$

$$1-k = \frac{7.17}{8.17 + \sqrt{3} \times 0.447} = \frac{7.17}{8.17 + .773} = \frac{7.17}{8.943} = 0.802$$

$$k = 0.198$$

$5632r \times 0.198 = 1115r \times 1.3 = 1449r = 1450r$ which is the soil contribution.

(U) To correct the burst conditions to standard air density the following formulae for correcting the slant range and dose must be used. Standard density, ρ_s , is defined as $1.293 \times 10^{-3} \text{ g/cm}^3$, the density of dry air at 0°C and one atmosphere pressure.

The corrected slant range, R_s , is given by

$$R_s = \frac{\rho}{\rho_s} R$$

and the corrected dose, D_s , is given by

$$D_s = \left(\frac{\rho_s}{\rho} \right)^2 D$$

with ρ/ρ_s given by

$$\rho/\rho_s = 0.269 \frac{P_0}{T} (C_0 - C_1 + C_2 - C_3 + \dots)$$

where $C_0 = 1$

$$C_1 = 1/2(0.269 \times 10^{-3} \rho_s g y/T)$$

$$C_2 = 1/6(0.269 \times 10^{-3} \rho_s g y/T)^2$$

$$C_3 = 1/24(0.269 \times 10^{-3} \rho_s g y/T)^3$$

$\vdots$

P_0 = pressure at the detector, mb

g = acceleration due to gravity, cm/sec^2

y = height of burst, cm

T = temperature, $^\circ\text{K}$

(U) The slant range and dose-correction factors were so calculated by approximating ρ/ρ_s via the parameter y/t that only those C 's whose values were equal to or greater than 0.01 were included. Inclusion of only C_0 assumes, in effect, a constant density between source and detector. Inclusion of C_0 and C_1 assumes a linear variation in density with height between source and detector. Inclusion of all the C 's assumes an exponential variation in density with height.

(U) For the Teapot and Plumbbob series where both the ground and burst conditions are available, the correction factor is given by

$$\rho/\rho_s = \frac{0.269}{2} \left(\frac{P_a}{T_a} + \frac{P_b}{T_b} \right)$$

where

a = ground conditions

b = burst height conditions

REFERENCES

1. R. J. Smith; "Thermal and Fast Neutron Effects on Dosimeter Films", NDL-TR-13, USA Nuclear Defense Laboratory, Edgewood Arsenal, Maryland, October 1961, Unclassified.
2. R. J. Smith and R. F. Benck; "Fission Neutron Effects on a Variety of Gamma Dosimeters", NDL-TR-37, August 1962, Unclassified.
3. R. J. Smith and R. F. Benck; "Thermal and Fast Neutron Effects on Dosimeter Films", Health Physics, Volume 9, No. 5, pp 473-484, May 1963. Unclassified.
4. R. J. Smith and R. F. Benck; "Effect of Neutron Interactions with Blast and Thermal Shields on Measured Gamma Dose", NDL-TR-19, November 1961, Unclassified.
5. R. J. Smith and R. F. Benck; "Effect of Neutron Interactions with Soil on Measured Gamma Dose", NDL-TR-18, October 1961, Unclassified.
6. S. Kondo; "Neutron Response of Silver-Activated Phosphate Glass, "Health Physics, Volume 4, pp 21-24, October 1960. Unclassified.
7. C. H. Bernard, W. T. Thornton, and J. A. Auzier; "Silver-Metaphosphate Glass for X-Ray Measurements in Coexistent Neutron and Gamma Fields", Health Physics, Volume 4, pp 236-43, April 1961. Unclassified.
8. W. T. Thornton and J. A. Auzier; "Some X-Ray and Fast Neutron Response Characteristics of Silver Metaphosphate Glass Dosimeters," ORNL 2912, September 1960, Unclassified.
9. R. J. Smith and R. F. Benck; "Glass Dosimetry in the Megaröntgen Range", Unpublished.
10. S. C. Sigoloff; "Fast-Neutron-Insensitive Chemical Gamma-Ray Dosimeter", Nucleonics, Volume 14, pp 54-56, October 1956. Unclassified.
11. D. L. Rigotti, R. F. Benck, R. J. Smith, and E. (E) Lissak; "Integrated Gamma Dose Measurements," Project 2.4, Operation Sun Beam, WT-2265 USA Nuclear Defense Laboratory, May 1963, Secret-Restricted Data
12. H. J. Donnert, N. Klein, and R. A. Gasse; "The Response of Selected Dosimeters to Radiation Delivered at High Dose Rates", NDL-TM-11, in publication. Unclassified.

13. W. A. Biggers and F. Waddell; "External Neutron Measurements 1946 through 1956", WT 9004, Los Alamos Scientific Laboratory, October 1957, Secret-Restricted Data.
14. J. H. McNeilly, J. E. Frandolig, and D. L. Rigotti; "External Neutron Measurements 1952 through 1958," CWLR 2377, USA Nuclear Defense Laboratory, Edgewood Arsenal, Maryland, March 1960, Secret-Restricted Data.
15. Corporation of America, White Plains, N. Y.; "The Nuclear Radiation Handbook", AFSWP-1100, Nuclear Development, March 1957, Secret-Restricted Data.
16. J. S. Wicklund, F. N. Wimenitz, and M. Gay Payne; "Determination of a Typical Neutron Spectrum from Fission Weapons", DOFL-TR-820, Diamond Ordnance Fuze Laboratories, Washington, D.C., March 1960, Secret-Restricted Data.
17. D. C. Borg and C. Eisenhower; "Spectrum and Attenuation of Initial Gamma Radiation from Nuclear Weapons"; AFSWP-502B, Armed Forces Special Weapons Projects, Washington, D.C., January 1955, Secret-Restricted Data.
18. E. Storm and E. Bemis; "Gamma Radiation as a Function of Distance"; Project 13.3a, Operation Teapot, WT-1208, Los Alamos Scientific Laboratory, October 1955, Secret-Restricted Data.
19. Defense Atomic Support Agency, Washington, D.C.; "Nuclear Test Summary Trinity-Hardtack (U)", DASA-1220, August 1962, Top Secret.
20. "Nuclear Test Summary Nougat-Dominic (U)", DASA 1211, August 1963, Top Secret.
21. H. Scoville, E. J. Hoffman, and E. C. Vicars; "Gamma Radiation Versus Distance," Project 7.1-17/RS-1, Operation Sandstone, Scientific Directors Report of Atomic Weapon Tests, Annex 8 Part IV, September 1948, Secret-Restricted Data.
22. E. Storm; "Gamma Radiation Exposure as a Function of Distance", Operation Ranger, WT-201, Report 5, June 1952, Confidential.
23. M. Ehrlich, and others; "Delayed Gamma Ray Measurements, Part III-Film Dosimeter Measurements", Operation Greenhouse, WT-81, Annex 1.2 of Scientific Director's Report, National Bureau of Standards, Washington, D.C., May 1952, Unclassified.

24. M. Morgenthau, and others; "Local Fallout from Nuclear Test Detonations (U), Volume II, Compilation of Fallout Patterns and Related Test Data (U)", NDL-TR-34, DASA 1251, August 1963, Secret-Restricted Data.
25. W. A. Biggers and L. J. Brown; "Neutron Measurements, Part II, External Neutron and Gamma Flux Measurements by Sample Activation", Operation Greenhouse, WT-114, Annex 1.5 to Scientific Directors' Report, Los Alamos Scientific Laboratory, August 1951, Secret-Restricted Data.
26. E. Storm; "Gamma Radiation as a Function of Distance", Project 10.5, Operation Buster, WT-408, Los Alamos Scientific Laboratory, March 1952, Secret-Restricted Data.
27. M. B. Forbes, R. G. Larrick, and E. J. Fuller; "Total Dosage", Project 2.3-1, Operation Jangle, WT-331, Signal Corps Engineering Laboratory, Fort Monmouth, N. J., March 1952, Unclassified.
28. L. Costrell; "Gamma Radiation as a Function of Time and Distance", Project 2.1a, Operation Jangle, WT-329, National Bureau of Standards, April 1952, Secret-Restricted Data.
29. C. L. Cowan, and others; "External Neutron Measurements", Project 10.8, Operation Buster, WT 416, Los Alamos Scientific Laboratory, June 1952, Secret-Restricted Data.
30. E. Storm; "Gamma Radiation Exposure as a Function of Distance", Project 15.2, Operation Tumbler-Snapper, WT-549, Los Alamos Scientific Laboratory, July 1952, Secret-Restricted Data.
31. R. G. Larrick, and others; "Total Gamma Exposure Versus Distance", Project 2.1, Operation Snapper, WT-522, Signal Corps Engineering Laboratory, September 1952, Unclassified.
32. T. D. Hanscome, and others; "Neutron Flux Measurements", Project 2.3, Operation Snapper, WT-524, Naval Research Laboratory, Washington, D. C., February 1953, Secret-Restricted Data.
33. C. L. Cowan; "External Neutron Measurements", Project 17.1 and 17.2, Operation Tumbler-Snapper, WT-555, Los Alamos Scientific Laboratory, June 1952, Secret-Restricted Data.
34. E. Storm, E. Bemis, and J. Malik; "Gamma Radiation as a Function of Distance", Project 5.1, Operation Ivy, WT-643, Los Alamos Scientific Laboratory, July 1955, Secret-Formerly Restricted Data.

35. E. Storm; "Gamma Radiation as a Function of Distance", Project 10.8, Operation Upshot-Knothole, WT-827, Los Alamos Scientific Laboratory, February 1956, Secret-Restricted Data.
36. R. G. Larrick, O. E. Johnson, and R. G. Marmioli; "Initial Gamma Exposure Versus Distance", Project 6.8a, Operation Upshot-Knothole, WT-756, Signal Corps Engineering Laboratories, April 1955, Secret-Restricted Data.
37. W. A. Biggers and L. J. Brown; "External Neutron Measurements with Threshold Detectors", Project 17.1, Operation Upshot-Knothole, WT-826, Los Alamos Scientific Laboratory, March 1955, Secret-Restricted Data.
38. D. K. Willet, T. D. Hanscome, and L. W. Fagg; "Neutron Flux Measurements," Project 2.3, Operation Upshot-Knothole, WT-720, Naval Research Laboratory, December 1953, Secret-Restricted Data.
39. L. J. Deal, H. H. Rossi, and G. S. Hurst et al; "Physical Measurements of Gamma and Neutron Radiation in Shelter and Instrumentation Evaluation", Project 24.2, Operation Upshot-Knothole, WT-789, US Atomic Energy Commission, Washington, D.C., August 1953, Secret-Restricted Data.
40. R. H. Dempsey, and others; "Gamma Radiation Exposure", Project 2.1, Operation Castle, WT-912, US Army Signal Engineering Laboratories, March 1959, Secret-Formerly Restricted Data.
41. W. A. Biggers, L. J. Brown, and K. C. Kohr; "External Neutron Measurements", Project 14.1, Operation Castle, WT-952, Los Alamos Scientific Laboratory, October 1955, Secret-Restricted Data.
42. E. Storm and E. Bemis; "Gamma Radiation as a Function of Distance" Project 13.3a, Operation Teapot, WT-1208, Los Alamos Scientific Laboratory, October 1955, Secret-Restricted Data.
43. J. B. Graham, and others; "Gamma Exposure Versus Distance", Project 2.1, Operation Teapot, WT-1115, US Army Signal Research and Development Laboratory, October 1959, Secret-Restricted Data.
44. P. S. Harris, and others; "Physical Measurement of Neutron and Gamma Radiation Dose from High Neutron Yield Weapons and Correlation of Dose with Biological Effect", Project 39.7, Operation Teapot, ITR-1167, Civil Effects Test Group, April 1955, ~~Secret-Restricted~~ Data.

45. L. J. Deal; "Gamma and Neutron Radiation Measurements", Project 39.1, Operation Teapot, WT-1174, US Atomic Energy Commission, May 1957, Confidential-Formerly Restricted Data.
46. T. D. Hanscome and D. K. Willet; "Neutron Flux Measurements", Project 2.2, Operation Teapot, WT-1116, US Naval Research Laboratory, July 1958, Secret-Restricted Data.
47. P. Brown, and others; "Gamma Exposure Versus Distance," Project 2.1, Operation Redwing, WT-1310, USA Signal Engineering Laboratories, February 1960, Secret-Restricted Data.
48. E. Storm, L. Goodwin, and C. Distenfeld; "Gamma Radiation as a Function of Distance," Project 13.4, Operation Redwing, WT-1361, Los Alamos Scientific Laboratory, April 1957, Secret-Restricted Data.
49. C. W. Luke, and others; "Neutron Flux Measurements," Project 2.51, Operation Redwing, WT-1313, USA Chemical Warfare Laboratories, Army Chemical Center, Maryland, September 1959, Secret-Restricted Data.
50. G. Carp, and others; "Initial Gamma Radiation Intensity and Neutron-Induced Gamma Radiation of NTS Soil", Project 2.5, Operation Plumbbob, WT-1414, USA Signal Research and Development Laboratory, April 1961, Secret-Restricted Data.
51. S. C. Sigoloff, and others; "Radiation Measurements Utilizing the USAF Chemical Dosimeters", Project 39.1, Operation Plumbbob, WT-1500, US Air Force School of Aviation Medicine, Randolph Air Force Base, Texas, February 1960, Secret-Restricted Data.
52. E. N. York, R. E. Boyd, and J. A. Blaylock; "Initial Neutron and Gamma Air-Earth Interface Measurements", Project 2.10, Operation Plumbbob, WT-1419, Air Force Special Weapons Center, Kirtland Air Force Base, Albuquerque, New Mexico, February 1960, Unclassified
53. The Nucleonics Department; "Gamma Dosimetry by Film-Badge Techniques," Project 39.1a, Operation Plumbbob, WT-1466, Edgerton, Germeshausen, and Grier, Inc., July 1959, Secret-Restricted Data.
54. J. A. Chiment, J. L. Goetz, and G. C. Facer; "Neutron and Gamma Radiation from Shot Laplace", Program 2, Operation Plumbbob, WT-1541, Headquarters, Field Command, DASA, November 1959, Secret-Restricted Data

55. G. S. Hurst, and R. H. Ritchie; "Radiation Dosimetry for Human Exposures", Project 39.5, Operation Plumbbob, WT-1504, Oak Ridge National Laboratory, March 1958, ~~Secret~~-Restricted Data.
56. M. Ehrlich; "The Sensitivity of Photographic Film to 3-MeV Neutrons and to Thermal Neutrons", Health Physics, Volume 4, No. 2, pp 113-128. December 1960. Unclassified.
57. S. C. Sigoloff, and others; "Gamma Measurements Utilizing the USA ~~Chemical~~ Dosimeter", Project 39.1 Operation Plumbbob, ITR-1500, US Air Force School of Aviation Medicine, December 1957, Confidential-Formerly Restricted Data.
58. D. L. Rigotti, and others; "Neutron Flux from Selected Nuclear Devices Project 2.3, Operation Plumbbob, WT-1412, USA Chemical Warfare Laboratories, April 1960, ~~Secret~~-Restricted Data.
59. J. C. Maloney and M. Morgenthau; "Gamma Dose from Very-Low-Yield Bursts", Projects 2.9 and 2.12b, Operation Hardtack, WT-1677, USA Chemical Warfare Laboratories, August 1960, Confidential-Formerly Restricted Data.
60. W. H. Moncrief, and others; "Effects of Very-Low-Yield Bursts on Biological Specimens (Swine and Mice)", Project 4.2, Operation Hardtack, WT-1663, Walter Reed Army Institute of Research, Washington D.C., September 1961, ~~Secret~~-Formerly Restricted Data.
61. M. Morgenthau and M. Schumchyk; "Residual Radiation from a Very-Low-Yield Burst", Project 2.10, Operation Hardtack, WT-1678, USA Chemical Warfare Laboratories, December 1960, ~~Secret~~-Restricted Data.
62. D. L. Rigotti, and others; "Neutron Flux from Very-Low-Yield Bursts", Projects 2.4a, 2.11 and 2.12a, Operation Hardtack, WT-1679, USA Chemical Warfare Laboratories, August 1960, ~~Secret~~-Restricted Data.
63. J. A. Auzier, J. S. Cheka, and F. W. Sanders; "Attenuation of Weapons Radiation; Application to Japanese Houses", Project 39, Operation Hardtack WT-1725, March 1961, ~~Secret-Restricted Data~~.
64. J. S. Cheka; "Private Communication, June 10, 1964, Unclassified.
65. D. L. Rigotti, and others; "Neutron Flux Measurements", Project 2.3, Operation Sun Beam, WT-2264, USA Nuclear Defense Laboratory, June 1963, ~~Secret~~-Restricted Data.

66. J. Kinch and R. W. Jenkins; "Gamma Radiation Measurements", Project 2.2, Operation Fish Bowl, WT-2013, USA Nuclear Defense Laboratory, December 1963, Secret-Restricted Data.
67. J. Kinch; "External Neutron Flux Measurements", Project 2.1, Operation Fish Bowl, WT-2012, USA Nuclear Defense Laboratory, December 1963, Secret-Restricted Data.